

(12) **United States Patent**
Hiltzik et al.

(10) **Patent No.:** **US 6,540,815 B1**
(45) **Date of Patent:** **Apr. 1, 2003**

(54) **METHOD FOR REDUCING EMISSIONS FROM EVAPORATIVE EMISSIONS CONTROL SYSTEMS**

5,408,976 A * 4/1995 Reddy 123/198 D
5,416,056 A * 5/1995 Baker 502/425
5,456,236 A * 10/1995 Wakashiro et al. 123/519

(List continued on next page.)

(75) Inventors: **Laurence H. Hiltzik**, Charleston, SC (US); **Jacek Z. Jagiello**, Charleston, SC (US); **Edward D. Tolles**, Charleston, SC (US); **Roger S. Williams**, Lexington, VA (US)

FOREIGN PATENT DOCUMENTS

EP 11 13163 7/2001
KR 2002012826 A * 2/2002
WO 92/01585 9/1992
WO WO 01/62367 8/2001

(73) Assignee: **MeadWestvaco Corporation**, Stamford, CT (US)

Primary Examiner—David A. Simmons

Assistant Examiner—Frank M. Lawrence

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(74) *Attorney, Agent, or Firm*—Terry B. McDaniel; Daniel B. Reece, IV; Thomas A. Boshinski

(57) **ABSTRACT**

(21) Appl. No.: **10/100,362**

Disclosed is a method for sharply reducing diurnal breathing loss emissions from automotive evaporative emissions control systems by providing multiple layers, or stages, of adsorbents. On the fuel source-side of an emissions control system canister, high working capacity carbons are preferred in a first canister (adsorb) region. In subsequent canister region(s) on the vent-side, the preferred adsorbent should exhibit a flat or flattened adsorption isotherm on a volumetric basis and relatively lower capacity for high concentration vapors as compared with the fuel source-side adsorbent. Multiple approaches are described for attaining the preferred properties for the vent-side canister region. One approach is to use a filler and/or voidages as a volumetric diluent for flattening an adsorption isotherm. Another approach is to employ an adsorbent with the desired adsorption isotherm properties and to process it into an appropriate shape or form without necessarily requiring any special provision for dilution. The improved combination of high working capacity carbons on the fuel source-side and preferred lower working capacity adsorbent on the vent-side provides substantially lower diurnal breathing emissions without a significant loss in working capacity or increase in flow restriction compared with known adsorbents used in canister configurations for automotive emissions control systems.

(22) Filed: **Mar. 18, 2002**

Related U.S. Application Data

(60) Provisional application No. 60/335,897, filed on Nov. 21, 2001.

(51) **Int. Cl.**⁷ **F02M 33/02**; B01D 53/04

(52) **U.S. Cl.** **95/146**; 95/900; 123/519


(58) **Field of Search** 95/90, 146, 148, 95/900–903; 96/132, 133, 147; 123/518, 519; 502/416

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,677,086 A * 6/1987 McCue et al. 123/519
4,894,072 A * 1/1990 Turner et al. 123/519
5,204,310 A * 4/1993 Tolles et al. 123/519
5,206,207 A * 4/1993 Tolles 502/423
5,207,808 A * 5/1993 Haruta et al. 123/519
5,238,470 A * 8/1993 Tolles et al. 95/143
5,250,491 A * 10/1993 Yan 264/117
5,276,000 A * 1/1994 Matthews et al. 502/424
5,304,527 A * 4/1994 Dimitri 502/416
5,324,703 A * 6/1994 McCue et al. 502/424
5,337,721 A * 8/1994 Kasuya et al. 123/519

30 Claims, 3 Drawing Sheets

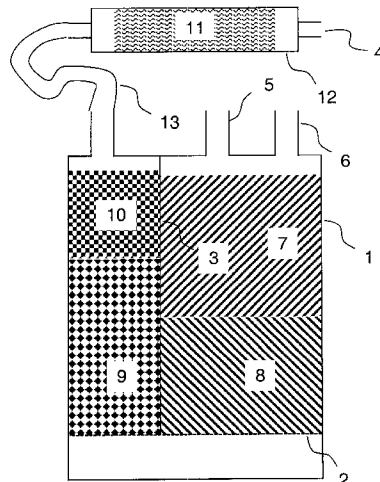

U.S. PATENT DOCUMENTS

| | | | | | | | | | |
|-------------|---|---------|----------------------|---------|--------------|---|---------|---------------------|---------|
| 5,456,237 A | * | 10/1995 | Yamazaki et al. | 123/519 | 5,863,858 A | * | 1/1999 | Miller et al. | 502/180 |
| 5,460,136 A | * | 10/1995 | Yamazaki et al. | 123/519 | 5,914,294 A | * | 6/1999 | Park et al. | 501/100 |
| 5,477,836 A | * | 12/1995 | Hyodo et al. | 123/519 | 5,914,457 A | * | 6/1999 | Itakura et al. | 123/519 |
| 5,538,932 A | * | 7/1996 | Yan et al. | 502/424 | 6,136,075 A | * | 10/2000 | Bragg et al. | 55/519 |
| 5,564,398 A | * | 10/1996 | Maeda et al. | 123/519 | 6,171,373 B1 | * | 1/2001 | Park et al. | 95/138 |
| 5,691,270 A | * | 11/1997 | Miller | 502/174 | 6,279,548 B1 | * | 8/2001 | Reddy | 123/519 |
| 5,736,481 A | * | 4/1998 | Miller | 502/174 | 6,284,705 B1 | * | 9/2001 | Park et al. | 502/180 |
| 5,736,485 A | * | 4/1998 | Miller | 502/174 | 6,488,748 B2 | | 12/2002 | Yamafuji et al. | |

* cited by examiner

FIGURE 1
PRIOR ART

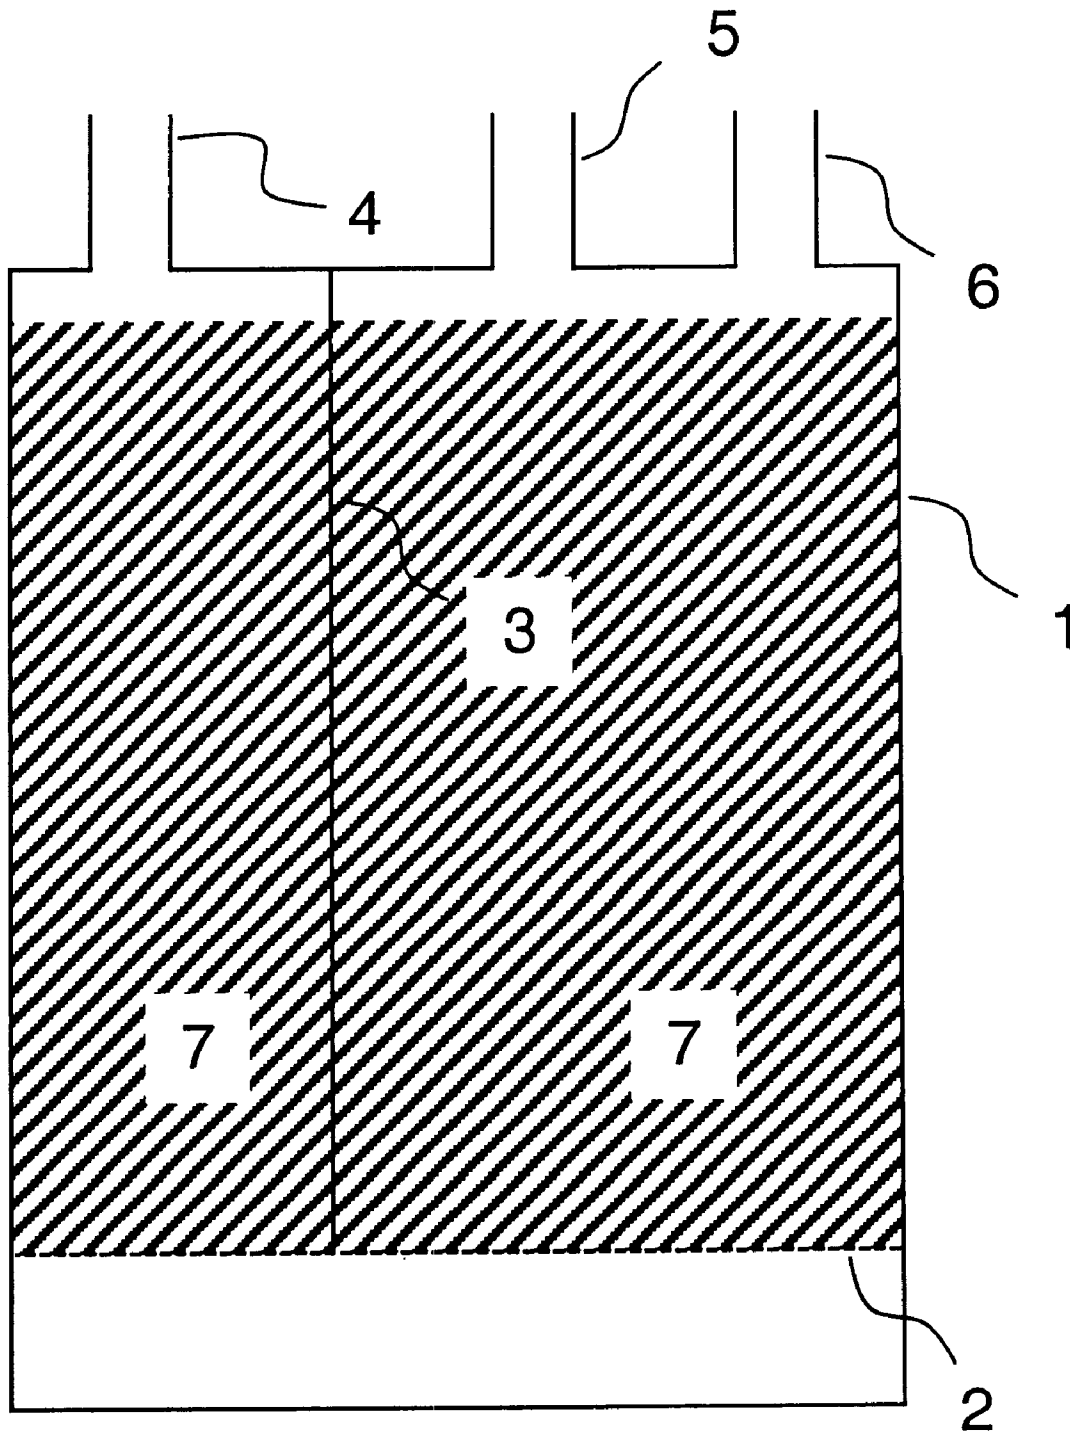


FIGURE 2


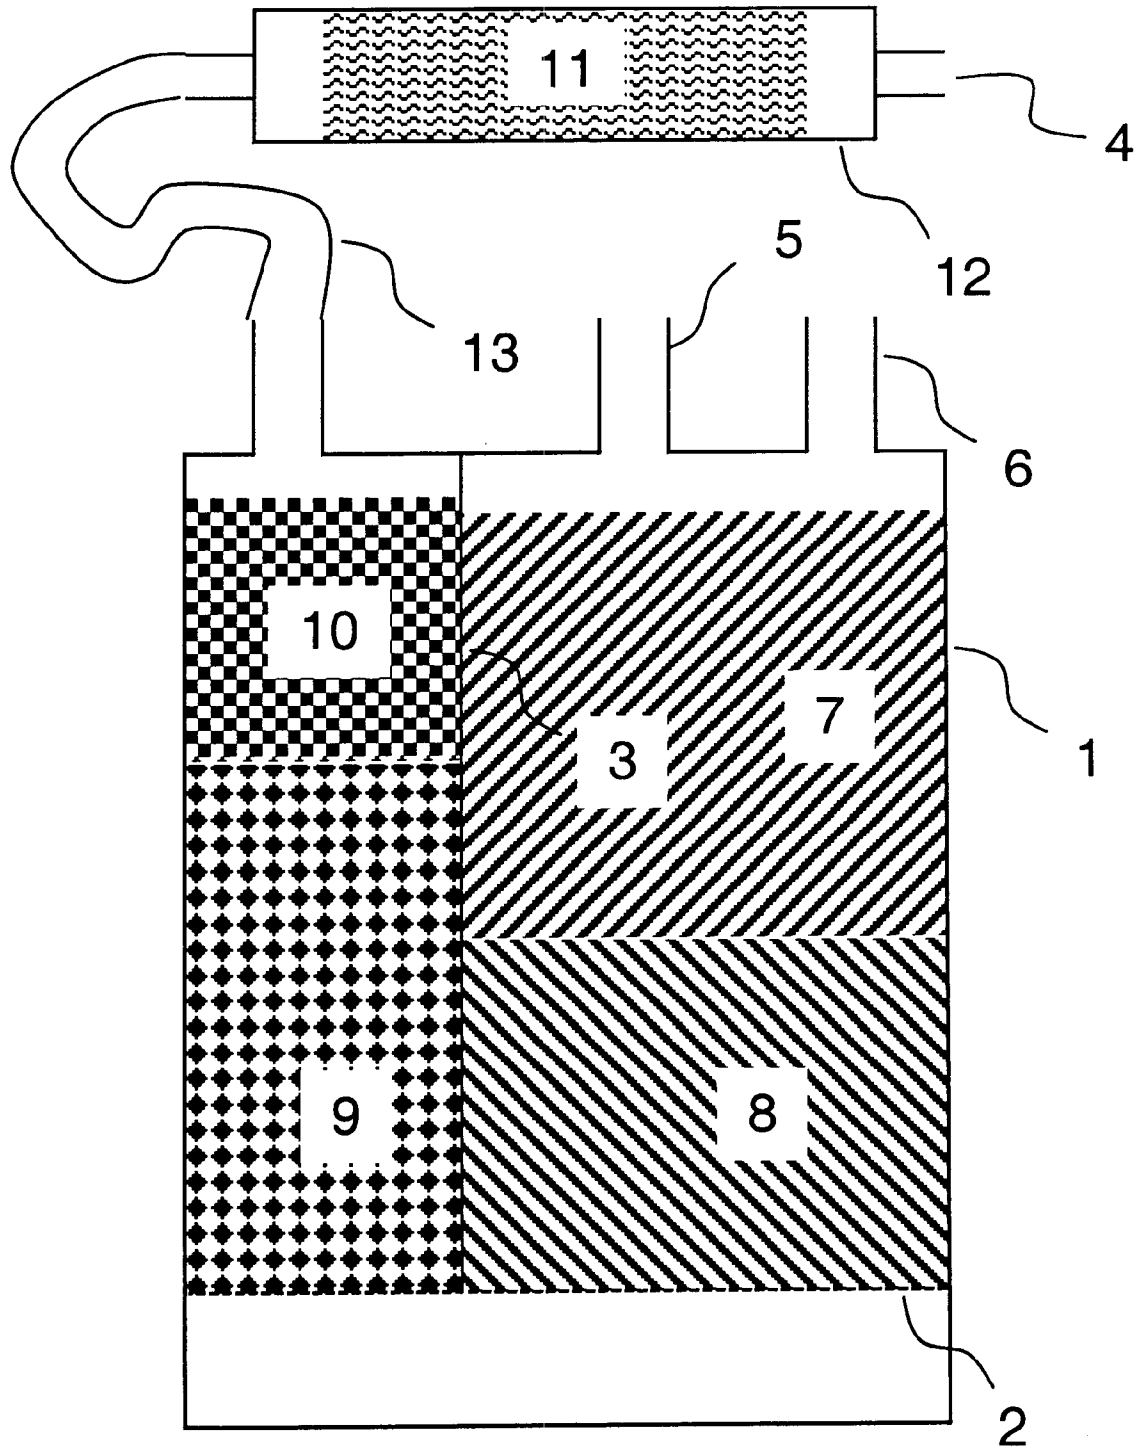


FIGURE 3

n-Butane Adsorption Isotherm at 25°C

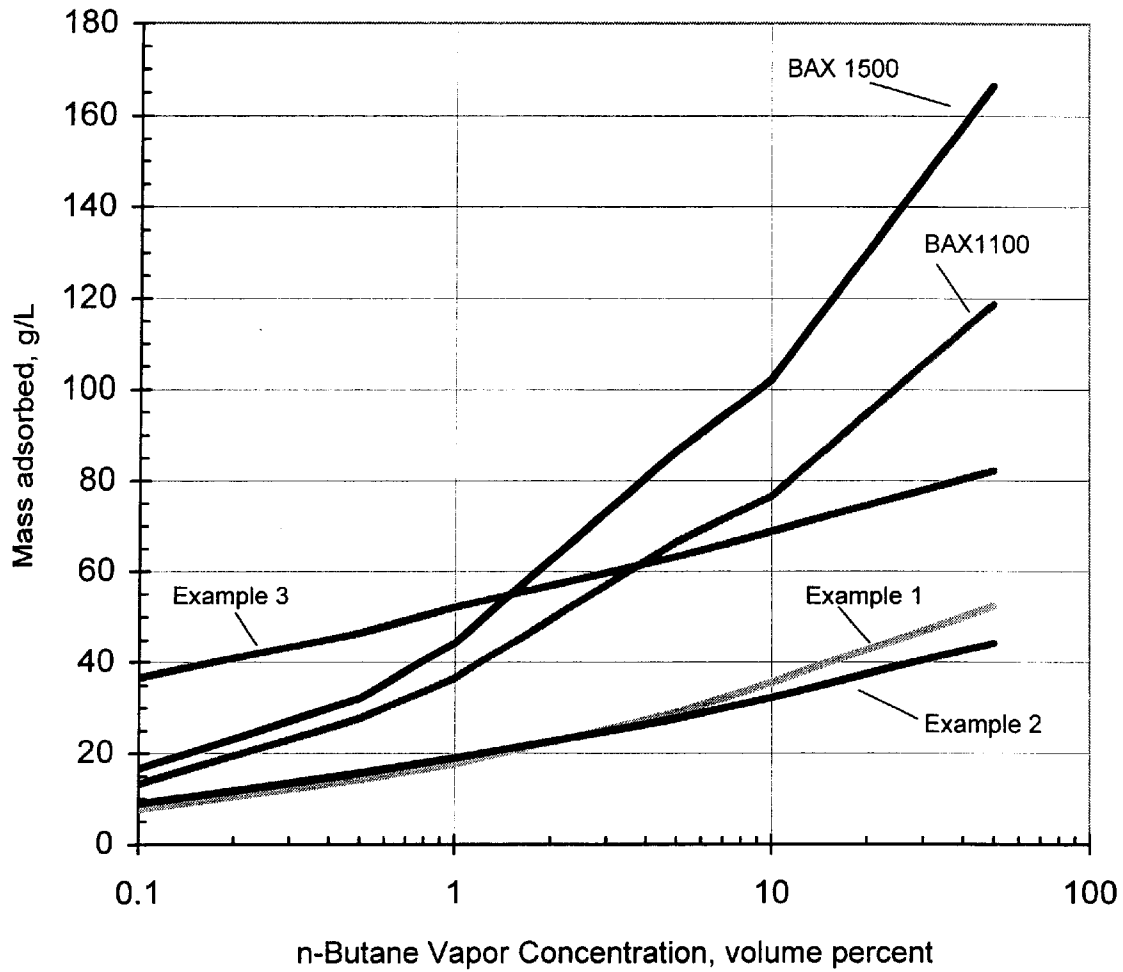

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.