

(12) **United States Patent**
Panasik et al.

(10) **Patent No.:** **US 6,643,278 B1**
(45) **Date of Patent:** **Nov. 4, 2003**

(54) **WIRELESS NETWORK CIRCUITS, SYSTEMS, AND METHODS FOR FREQUENCY HOPPING WITH REDUCED PACKET INTERFERENCE**

(75) Inventors: **Carl M. Panasik**, Garland, TX (US);
Thomas M. Siep, Garland, TX (US)

(73) Assignee: **Texas Instruments Incorporated**,
Dallas, TX (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/473,337**

(22) Filed: **Dec. 28, 1999**

Related U.S. Application Data

(60) Provisional application No. 60/125,573, filed on Mar. 23, 1999.

(51) Int. Cl.⁷ **H04Q 7/00**

(52) U.S. Cl. **370/330; 370/344**

(58) **Field of Search** 370/330, 480, 370/342, 441, 442, 241, 252, 254, 389, 392, 465, 394, 344, 345; 375/130, 131, 132-134; 380/49, 9, 48, 59; 455/422, 436

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,716,573 A	12/1987	Bergström et al.
5,506,863 A *	4/1996	Meidan et al. 375/134
5,528,622 A	6/1996	Cadd et al.
5,778,075 A *	7/1998	Haartsen 375/138
5,809,059 A	9/1998	Souissi et al.

* cited by examiner


Primary Examiner—Dang Ton

(74) *Attorney, Agent, or Firm*—Ronald O. Neerings; Wade James Brady, III; Frederick J. Telecky, Jr.

(57) **ABSTRACT**

A method (10) for determining a frequency hopping sequence for a newly-entering network. The method comprises the step of scanning (16) a plurality of frequency channels. For each of the plurality of frequency channels, the scanning step comprises detecting whether a signal (18, 22) exists on the channel and recording information (20, 24) corresponding to each channel on which a signal is detected. Finally, and responsive to the recorded information, the method forms (30) the frequency hopping sequence.

25 Claims, 2 Drawing Sheets

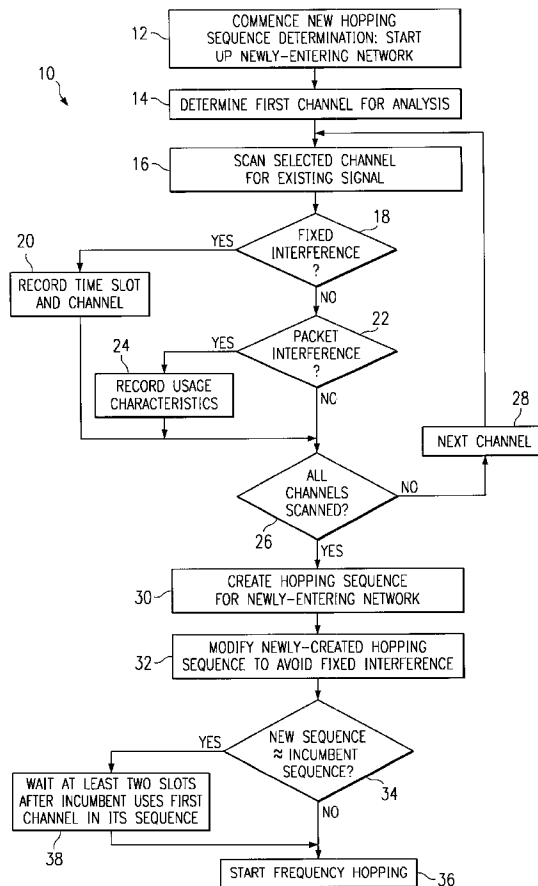

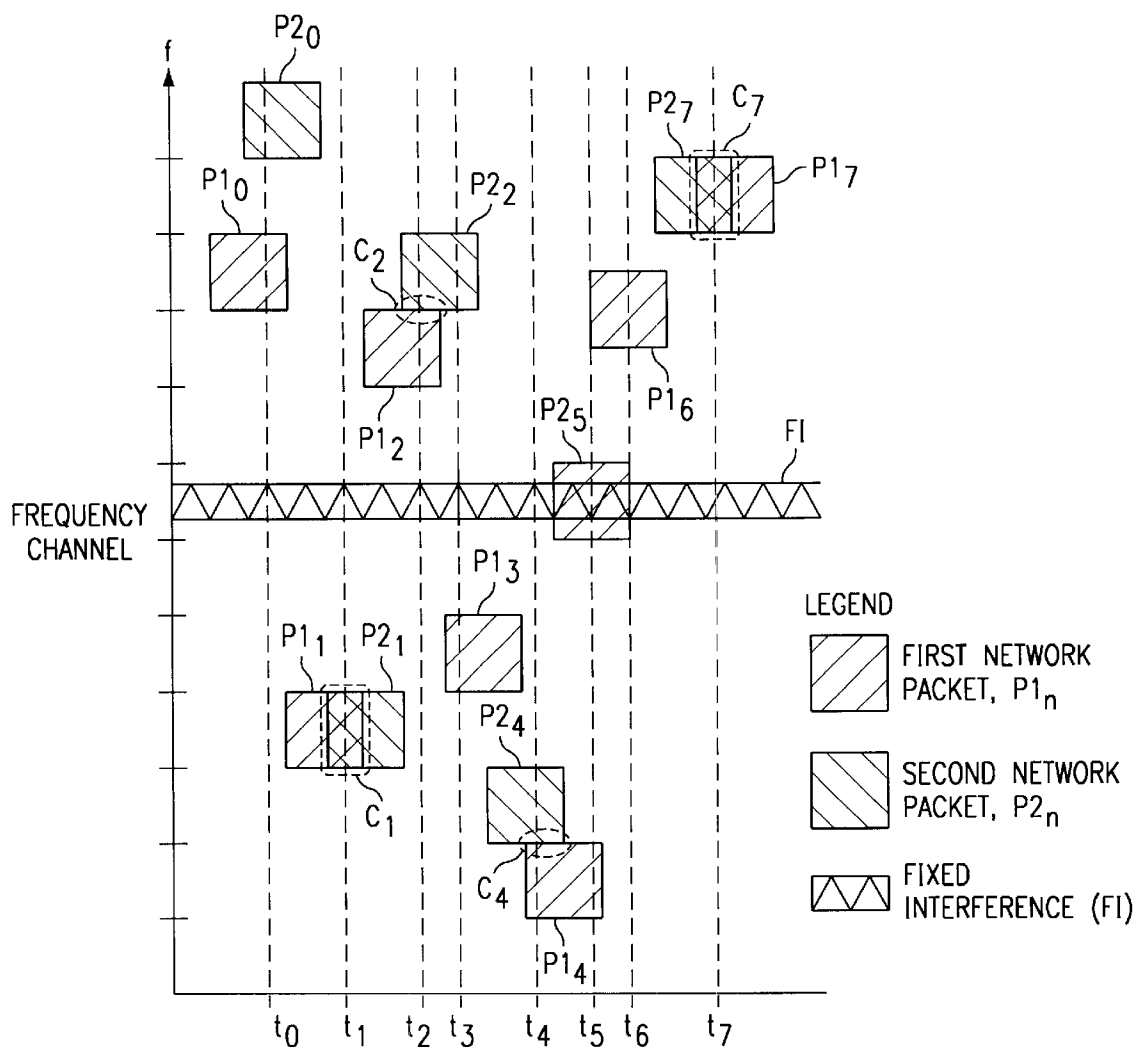


FIG. 1

40


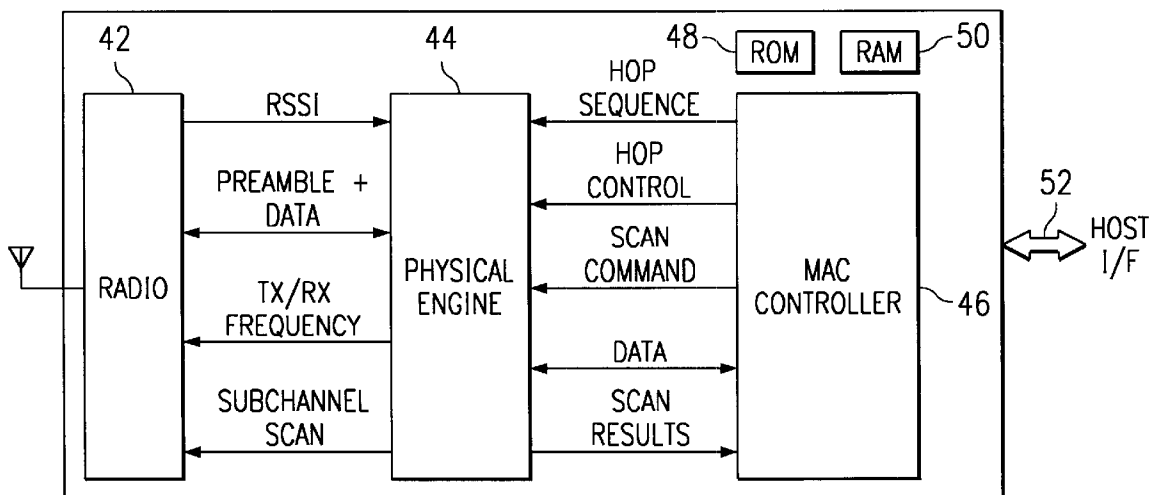


FIG. 3

FIG. 2

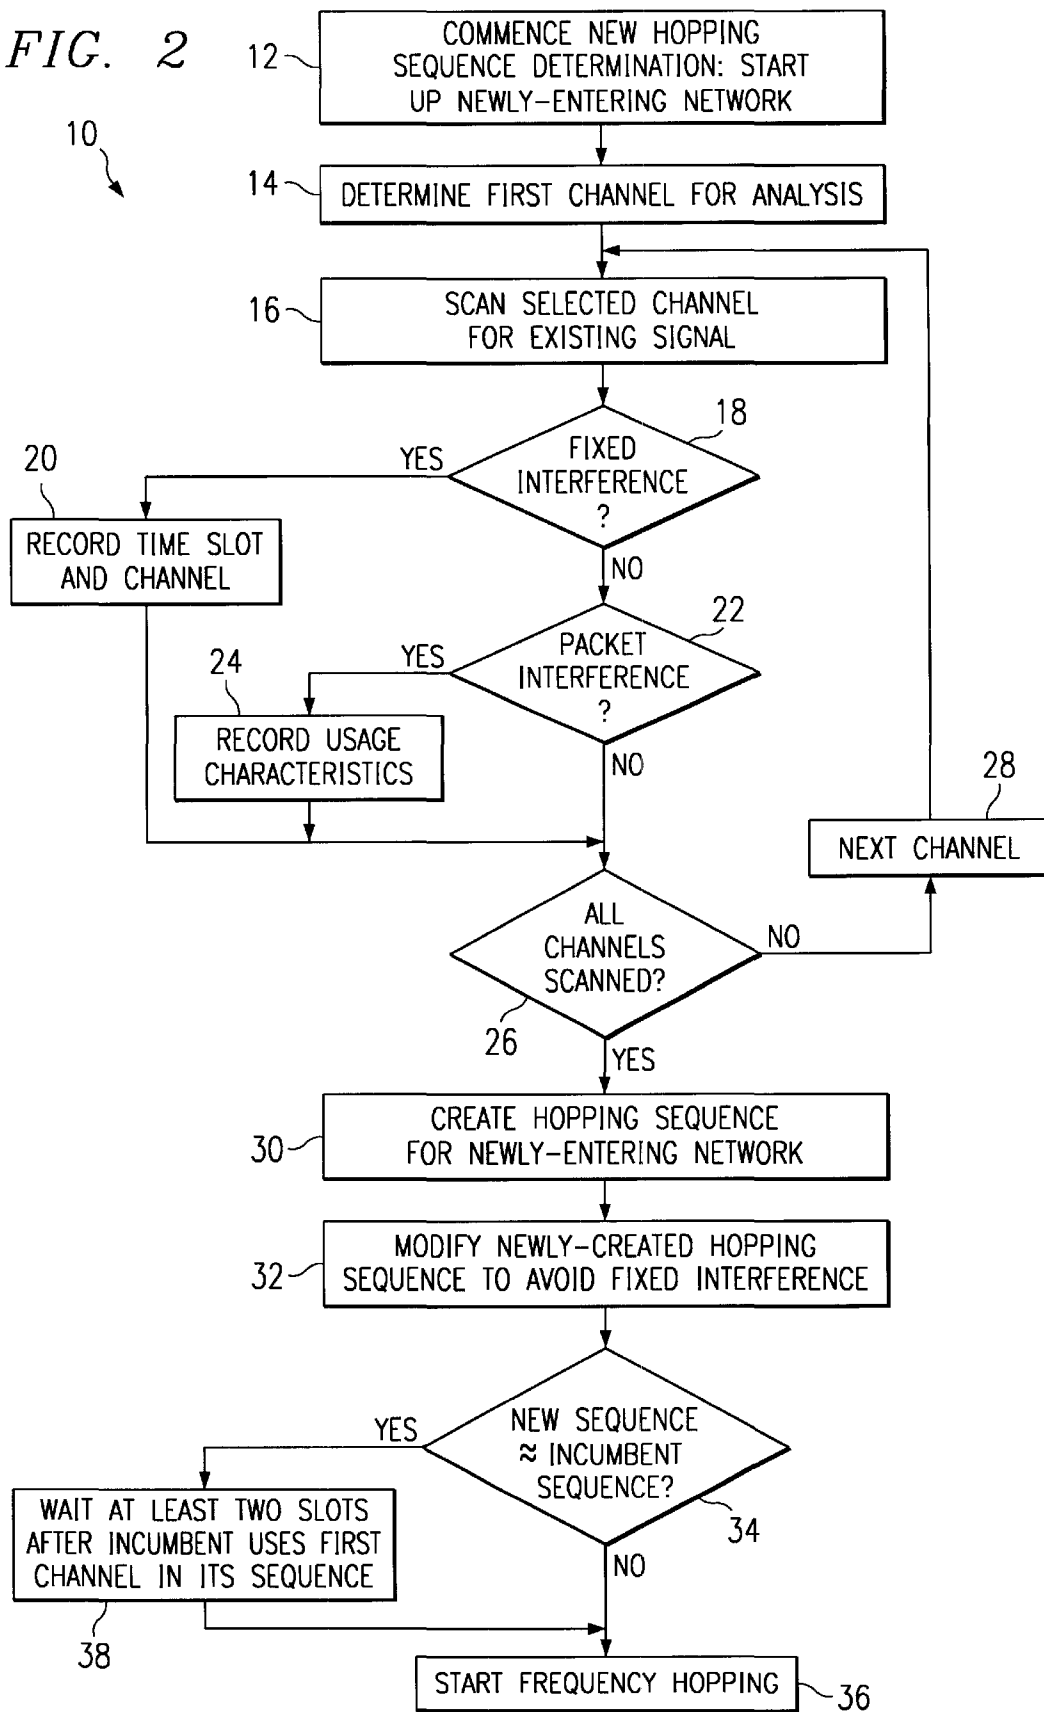

**WIRELESS NETWORK CIRCUITS,
SYSTEMS, AND METHODS FOR
FREQUENCY HOPPING WITH REDUCED
PACKET INTERFERENCE**

This application claims the benefit of Provisional Appli-
cation Ser. No. 60/125,573 filed Mar. 23, 1999.

**CROSS-REFERENCES TO RELATED
APPLICATIONS**

Not Applicable.

**STATEMENT REGARDING FEDERALLY
SPONSORED RESEARCH OR DEVELOPMENT**

Not Applicable.

BACKGROUND OF THE INVENTION

The present embodiments relate to wireless communica-
tion systems, and are more particularly directed to such
systems using frequency hopping.

Wireless networks are becoming increasingly popular,
and in this regard there has been improvement in many
aspects of such networks. Some improvements relate to
configurations that permit simultaneously operation of dif-
ferent networks where there is minimal or no interference
between communications belonging to each of the networks.
In this respect, the term network is used, and is further used
in the same manner for the remainder of this document, to
describe a system consisting of an organized group of
intercommunicating devices. Further in this respect, the
different networks may be labeled according to a first
network that is already transmitting in time followed by a
second network in time seeking to transmit and thereby
possibly communicating and causing interference due to a
communication overlapping the pre-existing communica-
tion of the first network. Accordingly, to facilitate the
remaining discussion, such a first network is referred to as
an incumbent network, while the network which seeks to
communicate, or in fact does communicate, after the incu-
bent network is referred to as the newly-entering network.
Given this terminology, the present background and embodi-
ments discussed below are directed to reducing interference
between incumbent network communications and newly-
entering network communications.

One approach to reducing the above-introduced interfer-
ence is known in the art as spread spectrum frequency
hopping and is sometimes referred to more simply as
frequency hopping. In frequency hopping, a newly-entering
network transmitter transmits packets of information at
different frequencies in an effort to reduce the chance that
the packet will interfere or "collide" with a packet trans-
mitted at a frequency by a transmitter in an incumbent network.
The change between frequencies, that is, from one frequency
to another, is said to be a "hop" between the frequencies.
Moreover, the goal is such that each packet from a newly-
entering network is transmitted at a frequency which neither
overlaps nor is near enough to a frequency at which an
incumbent network is transmitting. Further in this regard,
some systems (e.g., using Bluetooth protocol) transmit each
successive packet at a different frequency, that is, the trans-
mitter is "hopping" to a different frequency for each packet.
Alternatively, others systems (e.g., IEEE 802.11) transmit a
first set of packets at a first frequency, and then hop to a
second frequency to transmit a second set of packets, and so
forth for numerous different sets of packets at numerous

different respective frequencies. Note further that if inter-
ference or a collision does occur, it typically corrupts the
data of both packets, that is, the data transmitted by both the
newly-entering network and the incumbent network. As a
result, both networks are then required to re-transmit the
packets an additional time so as to replace the corrupted data
resulting from the collision.

In an effort to achieve minimal packet collision using
frequency hopping, two prior art methods have arisen for
determining the different frequencies to which a network
will hop. In a first method, a frequency hopping network
uses a pre-ordained hopping sequence. This first approach is
used by way of example under the IEEE 802.11 standard. In
a second method, a seed is provided to a pseudo-random
generator which produces a corresponding pseudo-random
series of frequencies along which the network hops. This
second approach is used by way of example under the fairly
recently developed Bluetooth protocol. Both of these
approaches have achieved some level of success in reducing
the amount of inter-network packet collision. Nevertheless,
the present inventors have empirically determined that by
locating two or more different networks in the same vicinity
such that transmissions from each different network effec-
tively compete for airtime, there still arises a considerable
amount of packet collisions, thereby reducing the effective
transmission rate for each network.

Frequency hopping as described thus far reduces the
chances of interference between a packet from newly-
entering network and a packet from an incumbent network.
Further in this regard and by way of additional background,
FIG. 1 illustrates communications of such packets and, as
detailed below, it also illustrates instances where packet
collisions occur. Looking to FIG. 1 in greater detail, its
horizontal axis illustrates time (or time slots), and its vertical
axis indicates frequency. Additionally, FIG. 1 illustrates a
number of blocks, where each block is intended to depict a
packet as transmitted by either an incumbent network or a
newly-entering network. Further in this regard, note that the
term "packet" is used in this document to define a block of
information sent in a finite period of time, where subsequent
such packets are sent at other times. This block of informa-
tion may take on various forms, and sometimes includes
different information types such as a preamble or other type
of control information, followed by user information which
is sometimes also referred to as user data. Further, the
overall packet also may be referred to in the art by other
names, such as a frame, and thus these other information
blocks are also intended as included within the term
"packet" for purposes of defining the present inventive
scope. In any event, returning to FIG. 1, for the sake of
reference, each packet illustrated in FIG. 1 is labeled with an
identifier using the letter "P" (i.e., for packet) and following
after that letter is a number corresponding to the network
which transmitted the packet. More particularly, packets
transmitted by the first network (i.e., the incumbent
network) are labeled with an identifier P1 while packets
transmitted by the second network (i.e., the newly-entering
network) are labeled with an identifier P2. Further, the
subscript for each packet identifies a time period encom-
passed by the duration of the packet. For example, during a
time to, the first network transmits a packet P1₀ while also
during time to the second network transmits a packet P2₀.
Further in this regard, in the prior art transmissions by the
first network are asynchronous with respect to transmissions
of the second network, both in start time and periodicity.
Thus, time to is only meant as a relative indication for the
first packet from each network, and it is not intended to

suggest that the packets from both networks begin and end at the same time.

With respect to all packets in FIG. 1, the preceding demonstrates that each packet begins at a certain time, ends at a later time, and fills a certain frequency range (where the range is referred to as a channel). As a result and as described below, interference may occur if the area in FIG. 1 defined by a packet overlaps or is within a certain distance of a packet from another wireless link. Indeed and as discussed below, such interference may occur in one of four different ways.

Time t_1 in FIG. 1 illustrates a first type of packet interference, where it may be seen that the first network transmits a packet $P1_1$. After packet $P1_1$ commences but also during time t_1 the second network transmits a packet $P2_1$. The overlap of packets $P1_1$ and $P2_1$ is shown as a first collision C_1 . Note that the horizontal alignment of packets $P1_1$ and $P2_1$ graphically indicates that in the example of collision C_1 , both packets occupy the same frequency channel. Thus, collision C_1 represents an example where two different networks attempt to transmit packets during an overlapping time period and along the same channel.

Before proceeding with other types of packet collisions, an additional discussion is noteworthy with respect to a methodology which has been used to further reduce the likelihood and impact of packet collisions such as collision C_1 . More particularly, this additional methodology is referred to in the art as listen-before-talk ("LBT"). In an LBT system, the system uses the hopping sequence described above, but prior to transmitting along a channel in the sequence the system monitors (or "listens") at the channel to determine if there is another packet already occupying that channel during the current time. Returning to packet $P1_1$ by way of example, if the second network employed LBT, then it would listen at the desired channel at which it intended to transmit $P2_1$ and would therefore detect the presence of packet $P1_1$. As a result, the second network would avoid collision $C1$ by not transmitting packet $P2_1$ at the desired frequency, but instead it would delay a random period and then proceed to the next designated channel of its hopping sequence. Next, the second network would listen at that next designated channel to again determine if that channel was occupied by a packet from another network, and if no packet was detected then the second network would transmit its packet; however, if this next designated channel also was occupied, then the second network would continue to examine additional channels in this same manner until a channel was detected without being occupied by a packet from another network, at which time the second network would transmit its packet along the now unoccupied channel. Given this process, however, note that a delay arises in LBT systems, where the amount of delay depends on the number of times that the LBT network is forced to listen, detect, and advance from an occupied channel, and then delay an additional random period to listen, detect, and transmit along an unoccupied channel.

While LBT as shown above reduces the possibility of collisions, it also has drawbacks. For example, LBT delays transmission by the network which was prepared to transmit along a channel but was prevented from doing so due to an already-transmitted packet in the desired channel. As another example, it adds an element of delay to each packet due to its listening aspect. Also, all the devices in an environment must utilize LBT to gain the most benefit (fairness) of the scheme. As still another example, some protocols (e.g., Bluetooth) utilized in the unlicensed bands do not support LBT, while such protocols may nonetheless

provide other beneficial aspects and, thus, the choice to use such a protocol is a tradeoff in that other aspects are obtained without the availability of LBT.

Time t_2 in FIG. 1 illustrates a second type of packet interference in connection with a collision C_2 occurring between a first network packet $P1_2$ and a second network packet $P2_2$. For collision C_2 , the incumbent first network transmits packet $P1_2$ during a period including time t_2 and at a first channel, and thereafter the second network transmits packet $P2_2$ also during a period including time t_2 (i.e., the periods of the packets overlap). Packet $P2_2$ is transmitted at a second channel which, while different than the channel of packet $P1_2$, it is immediately adjacent the channel occupied by packet $P1_2$. Further in this regard, it is known in the art that while packets occupy a certain channel as shown by the vertical displacement of a packet in FIG. 1, there is an additional tendency for a packet to provide slight interference or "splatter" into adjacent frequency channels. As a result of this effect, even though packets $P1_2$ and $P2_2$ occupy different channels, they are still in adjacent channels and, thus, they are close enough to one another in frequency such that the splatter effect causes a collision between the packets. Indeed, in some networks the filters used are relatively inexpensive and, as a result, the concept illustrated with packets $P1_2$ and $P2_2$ may also apply to next-adjacent channels, that is, to the channels that are one more channel away from the channels adjacent to the channel in which a packet is transmitted. Thus, collision C_2 represents an example where two different networks attempt to transmit packets during an overlapping time period and along adjacent (or next-adjacent) frequency channels. Here, if neither network uses LBT, then both packets $P1_2$ and $P2_2$ will require retransmission due to the collision. If, however, the network that intended to transmit the second packet of the two uses LBT, then note first that LBT mechanisms are less likely to correctly discern an adjacent channel collision. However, if the LBT mechanism does recognize the potential adjacent channel collision, then the second packet is not transmitted along the channel represented by $P2_2$ and instead that packet is delayed. This delay, while diminishing the effective transmission of the second network, avoids any disturbance to the first already-existing packet. In the example of time t_2 , therefore, if the second network uses LBT, then packet $P1_2$ will not be disturbed because the second network will move the transmission of packet $P2_2$ to a different channel.

Time t_4 in FIG. 1 illustrates a third type of packet interference in connection with a collision C_4 , which is comparable to collision C_2 except that for collision C_4 the networks transmit in opposite order. More particularly, for collision C_4 , the second network first transmits a packet $P2_4$ and, thereafter, the first network transmits a packet $P1_4$. The duration of both of these packets overlaps time t_4 , and again their channels are adjacent to one another rather than being the same channel. Nonetheless, the splatter effect again causes sufficient reach of each packet into the adjacent channel such that a collision occurs. Here, if neither network uses LBT, then both packets $P2_4$ and $P1_4$ require re-transmission due to the collision; if, however, the network transmitting the second packet in time (i.e., $P1_4$) of the two which would otherwise collide uses LBT, then only that packet is delayed and the first already-existing packet (i.e., $P2_4$) is not disturbed.

Time t_7 in FIG. 1 illustrates a fourth type of packet interference in connection with a collision C_7 , which is comparable to collision C_1 except that for collision C_7 the networks transmit in opposite order. More particularly, for

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.