

[54] **SEPARATION SYSTEM FOR HYDROTREATER EFFLUENT HAVING REDUCED HYDROCARBON LOSS**

[75] Inventors: **Andrew S. Zarchy, Amawalk; Martin F. Symoniak, Mahopac, both of N.Y.; Robert S. Haizmann, Rolling Meadows, Ill.**

[73] Assignee: **UOP, Des Plaines, Ill.**

[21] Appl. No.: **458,267**

[22] Filed: **Dec. 28, 1989**

[51] Int. Cl.⁵ **C10G 67/06**

[52] U.S. Cl. **208/99; 208/100; 208/213; 208/310 Z**

[58] Field of Search **208/99, 100, 212, 213, 208/217, 188, 310 Z**

[56] **References Cited**

U.S. PATENT DOCUMENTS


2,882,243	4/1959	Milton	55/75
2,897,141	7/1959	Honeycutt et al.	208/209
3,714,031	1/1973	van der Toorn et al.	208/213
3,725,252	4/1973	Maier	208/213
4,464,252	8/1984	Eberly, Jr. et al.	208/244 X
4,522,709	6/1985	Aldag et al.	208/217 X
4,627,910	12/1986	Millman	208/112
4,741,819	5/1988	Robinson et al.	208/212 X
4,778,944	10/1988	Zarchy	585/751 X
4,830,733	5/1989	Nagji et al.	208/302 X
4,831,208	5/1989	Zarchy	585/737
4,892,567	1/1990	Yan	55/33


Primary Examiner—Curtis R. Davis
 Assistant Examiner—William C. Diemler
 Attorney, Agent, or Firm—Thomas K. McBride; John G. Tolomei

[57] **ABSTRACT**

A hydrotreating process uses a separation section that reduces the loss of C₅ and higher hydrocarbons through the use of a low hydrogen to hydrocarbon ratio in the reactor and the adsorptive removal of a majority of hydrogen sulfide from a liquid phase hydrotreater effluent. Sulfurous hydrocarbon feed is admixed with hydrogen to maintain a hydrogen to hydrocarbon ratio of less than 50 SCFB. The hydrogen and hydrocarbons are passed through a hydrotreater reactor to convert sulfur compounds to H₂S. The hydrotreater effluent is cooled and after flashing of any excess hydrogen or light ends the cooled effluent is contacted with an adsorbent material for the removal of H₂S. A hydrotreated hydrocarbon product is withdrawn from the adsorption section. The low hydrogen to hydrocarbon ratio permits the process to be used without the recycle of hydrogen thereby eliminating the need for separators and compressors that were formerly used to recycle hydrogen to the hydrotreater. The elimination of the recycle and the low hydrogen to hydrocarbon ratio simplifies the flowscheme which can use a simple separator to flash light ends, hydrogen and some H₂S from the hydrotreater effluent. This process thus eliminates the need for a stripping section that was formerly needed to remove light ends and hydrogen sulfide from the hydrotreated product. The adsorptive removal of the H₂S and the limited venting of hydrogen allows essentially all of the hydrotreated product to be preserved. In most flowschemes H₂S removal can be carried out in the absorbers that are usually present for drying of the hydrotreated feed.

17 Claims, 1 Drawing Sheet

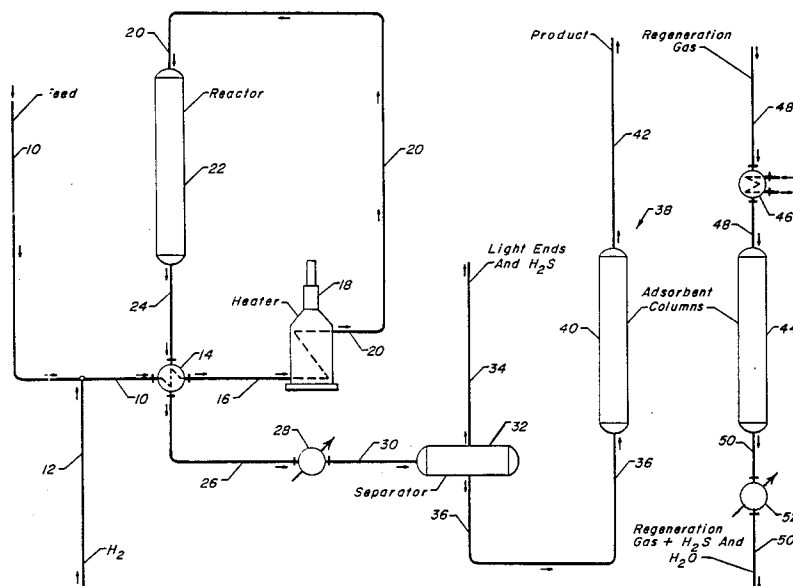

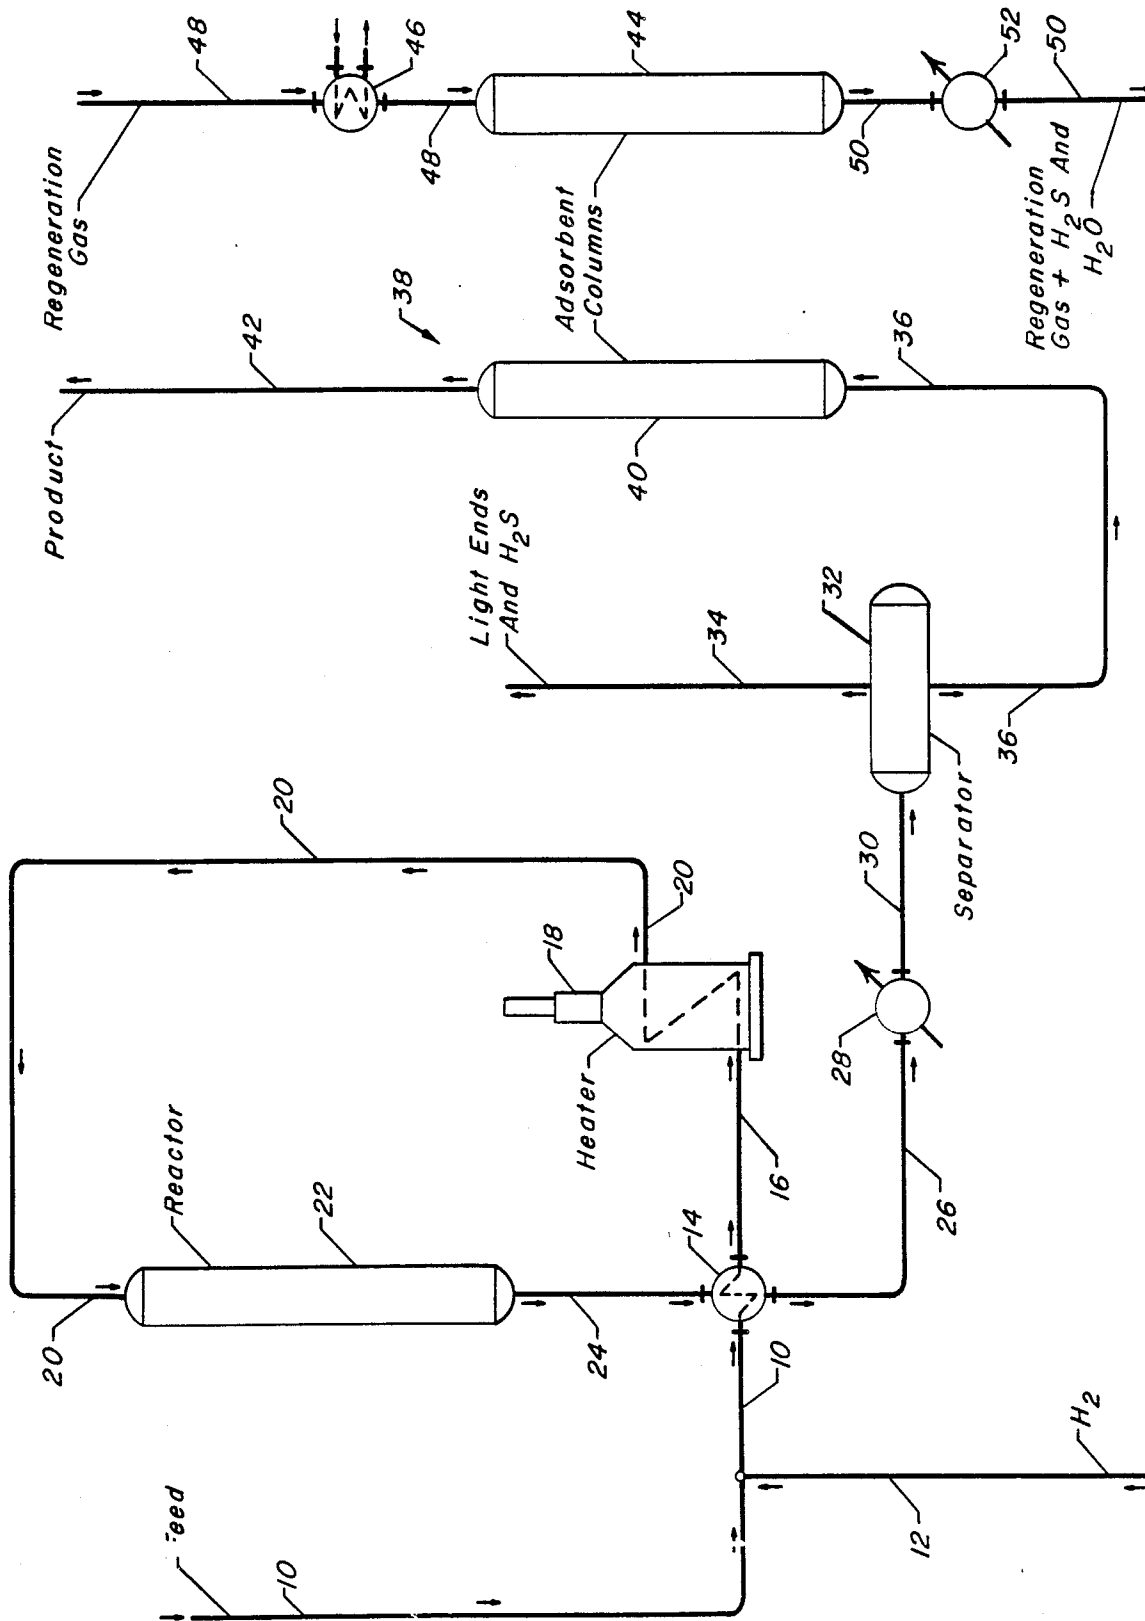

SEPARATION SYSTEM FOR HYDROTREATER EFFLUENT HAVING REDUCED HYDROCARBON LOSS

BACKGROUND OF THE INVENTION

This invention relates generally to the hydrotreatment of hydrocarbons. This invention relates more specifically to the supply of hydrogen to a hydrotreatment zone and the separation of sulfur compounds from the hydrotreater effluent.

DESCRIPTION OF THE PRIOR ART

Hydrotreatment is a common method for the upgrading of feedstocks by the removal of contaminants such as sulfur, oxygen, and nitrogen. Hydrotreatment removes contaminants from the feed that are objectionable either in the end products or will interfere with the operation of processes that are used to treat or convert the hydrocarbon feedstream. Sulfur is a particularly troublesome contaminant since it is often a poison for the catalyst in downstream processes, particularly platinum-containing catalysts, is corrosive to the process equipment and is objectionable in most hydrocarbon products. In order to eliminate the adverse catalytic effects of sulfur compounds, it is often necessary to reduce these compounds to very low levels. In isomerization, for example, sulfur concentrations of less than 0.5 ppm are needed. It is well known that organo-sulfur and organo-oxygen compounds can be removed from hydrocarbon fractions by the use of hydrotreatment. Hydrotreatment feedstocks containing organo-sulfur compounds such as mercaptans, sulfides, disulfides and thiophenes are reacted with hydrogen to produce hydrocarbons and hydrogen sulfide. It is also well known that the reaction of the organo-sulfur compounds is accelerated by the presence of catalysts comprising Group VIII metals and Group VIB metals supported on a refractory inorganic oxide. Hydrotreating also removes oxygenate compounds by converting them into lower boiling hydrocarbons and water. The hydrogen sulfide and at least a portion of the water are typically removed in a stabilizer from which a purified hydrocarbon stream is recovered.

The desulfurization and deoxygenation of the hydrocarbons in the hydrotreater is basically a hydrogenation process. In hydrogenation processes, the reaction rate is generally believed to be in proportion to the hydrogen partial pressure. As a result, conventional hydrotreating processes tend to use a fairly high hydrogen to hydrocarbon ratio.

U.S. Pat. No. 4,627,910 issued to Milman teaches the hydrotreatment of light feeds including naphtha with a catalyst comprising Group VIII metal, phosphorus and cobalt on an alumina support at hydrotreatment conditions including a temperature of from 400°–950° F. and a pressure of from 20 to 6000 psig. The Milman reference also teaches that the process requires a minimum hydrogen circulation of 50 standard cubic feet per barrel (SCFB) with much higher hydrogen to hydrocarbon circulations of 400–10,000 SCFB being preferred. The need to reduce contaminants to low concentration levels has also led those skilled in the art to believe that a high hydrogen to hydrocarbon ratios are necessary in order to achieve the desired degree of contaminant removal. For example, in isomerization processes, it is not only necessary to reduce sulfur compounds to low

concentrations but oxygen concentrations of less than 0.1 ppm are also sought.

Providing a high hydrogen to hydrocarbon ratio in the hydrotreatment zone complicates the arrangement of the process and presents a number of drawbacks. The use of a high hydrogen to hydrocarbon ratio adds significant cost to the operation. Typically, the high hydrogen to hydrocarbon ratio requires facilities for recovering hydrogen and returning it to the hydrotreatment reactor. When hydrogen is recycled, a recycle compressor, additional heat exchangers and extra cooling capacity are all required and add significant capital and operating expense to the process. The expense of the recycle facilities can be avoided by operating with once-through hydrogen, but at high hydrogen to hydrocarbon ratios once-through hydrogen is not economical due to high losses of hydrogen and more importantly, product that would occur without increasing the size and complexity of the product recovery facilities.

A conventional hydrotreating system will use separation facilities that include a separator, a stripper and usually an adsorption section. The adsorption section is typically used to remove water from the bottom fraction of the stripper. The separator is typically used for the recovery of hydrogen that is recycled to the hydrotreatment zone in order to supply most of the hydrogen that circulates through the hydrotreating section. The remaining portion of the hydrotreater effluent is taken from the separator in liquid phase and introduced into a stripper from which an overhead stream consisting primarily of light hydrocarbons and hydrogen sulfide gas is taken overhead to remove sulfur and light gases from the hydrotreatment zone while the remaining portion of the effluent is taken as a bottoms stream for further processing. The recycle of the entire gaseous stream, from the separator in order to recover hydrogen, forces all of the hydrogen sulfide gas to be removed with the overhead from the stripper. The high gas volume that leaves the overhead from the stripper carries valuable product hydrocarbons away in a light gas stream. Since it is uneconomical to recover such hydrocarbons from the light gas stream, they are essentially lost from the process. In addition, the high volume of hydrogen that circulates through the separator and hydrotreatment reactor increases the concentration of product hydrocarbons that are recirculated through the hydrotreatment reactor thereby resulting in a larger throughput through the reactor and loss of product hydrocarbons to side reactions such as cracking.

It is an object of this invention to reduce the loss of product hydrocarbons by the separation of light gases and sulfur compounds from the effluent of a hydrotreatment zone.

Another object of this invention is to provide a separation section for a hydrotreatment process that has less equipment and complexity than those currently in use.

Yet another object of this invention is to reduce the volumetric flow rate through a hydrotreatment reaction for a given volume of the hydrocarbons.

A further object of this invention is the elimination of recycle facilities for maintaining a high hydrogen to hydrocarbon ratio in an a hydrotreatment zone.

BRIEF DESCRIPTION OF THE INVENTION

This invention is a hydrotreatment zone and separation section that uses a low hydrogen to hydrocarbon ratio in the hydrotreatment zone thereby eliminating

the need for the recycle of hydrogen and allowing sulfur compounds to be withdrawn from the hydrotreatment effluent in an adsorption zone. In the process of this invention, a sulfurous hydrogen-containing feedstream is contacted with a hydrotreatment catalyst at a low hydrogen concentration. It has been found that a high degree of sulfur conversion can be obtained at low hydrogen to hydrocarbon ratios. This degree of sulfur compound conversion allows desulfurization of the feedstock to less than the necessary 0.5 ppm level. Without the hydrogen recycle, the hydrotreatment zone operates with a hydrogen to hydrocarbon ratio of less than 50 SCFB and preferably in a range between 10 to 40 SCFB. This low addition of hydrogen permits venting of the hydrogen in the downstream separation sections without a significant loss of heavier hydrocarbons, such as pentanes, or an economic penalty in the cost of the hydrogen lost. The downstream separation relies primarily on adsorptive separation of the hydrogen sulfide produced by the conversion of the sulfur compounds in the hydrotreatment zone. In most cases, the separation facilities also include a single flash zone that separates the hydrogen from normally liquid hydrocarbons. When the flash zone is used, H₂S will be removed as a gas with the hydrogen as well as in the liquid phase adsorption stream. The use of the lower hydrogen to hydrocarbon ratio is particularly advantageous in the separation section since it vents excess H₂S; such venting was not possible in the conventional flowscheme of the prior art since the overhead from the flash zone contained too high of a concentration of valuable hydrocarbons. However, due to the much greater liquid volume, most of the H₂S is removed adsorptively. It is believed that the adsorptive separation section will cost less than the conventional stripper of the prior art. However, aside from any decreased cost associated with providing an adsorptive separation for the H₂S, additional product is recovered from the adsorptive separation section, product which would have been lost from the stripping section of the conventional hydrotreatment separation facilities. The additional cost of providing adsorptive separation is further minimized for many hydrotreatment arrangements that already provide an adsorptive separation for the removal of water.

Accordingly, in one embodiment, this invention is a process for treating a sulfurous hydrocarbon stream comprising C₅ and higher molecular weight hydrocarbons to convert sulfur compounds to H₂S and reduce the sulfur concentration of the hydrocarbon stream. The process includes the steps of admixing a sulfurous hydrocarbon feedstream with a hydrogen stream to provide a hydrogen concentration in a range of from 10 to 50 SCFB. The sulfurous hydrocarbon stream and hydrogen are contacted in a hydrotreating zone with a hydrotreating catalyst at hydrotreating conditions to convert sulfur compounds to H₂S and produce a hydrotreated effluent stream. The hydrotreated effluent stream is passed to a flash separator at conditions that will maintain a liquid phase containing at least 75 wt. % of the H₂S and hydrogen from the hydrotreated effluent to produce an at least partially stabilized effluent. The partially stabilized effluent passes in liquid phase to an adsorption section where it is contacted with an adsorbent material selected for H₂S. A desulfurized hydrocarbon stream is recovered from the adsorption section.

In another embodiment, this invention is a process for treating a sulfurous hydrocarbon stream that comprises

C₅ and higher molecular weight hydrocarbons to convert sulfur compounds to H₂S and reduce the sulfur concentration of the hydrocarbon stream wherein the process includes the steps of admixing a sulfurous hydrocarbon stream with a hydrogen stream in an amount that will produce a hydrogen to hydrocarbon ratio of less than 50 SCFB. The sulfurous hydrocarbon stream and the hydrogen are contacted in a hydrotreating zone with a hydrotreating catalyst at hydrotreating conditions to convert sulfur compounds to H₂S and produce a hydrotreated effluent stream. The hydrotreating zone can also convert oxygenate compounds to H₂O. The amount of hydrogen that is admixed with the sulfurous hydrocarbon stream is adjusted to produce a hydrogen to hydrocarbon ratio of less than 30 SCFB in the hydrotreated effluent stream. The hydrotreated effluent stream is cooled so that essentially all of the hydrogen and hydrogen sulfide is adsorbed into a liquid phase of the hydrotreated effluent stream. The cooled hydrotreated effluent stream is passed to an adsorption section and contacted with an adsorbent material selective for H₂S and a desulfurized hydrocarbon stream is recovered from the adsorption section. Additional details and embodiments of this invention are disclosed in the following detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 depicts a process arrangement for the process of this invention.

DETAILED DESCRIPTION OF THE INVENTION

A basic understanding of this invention can be obtained from FIG. 1 which shows a basic flowscheme for the process of this invention. The hydrocarbon feed enters the process by line 10 where it is admixed with make-up hydrogen from line 12. The combined feed and hydrogen are first heated in exchanger 14 and carried by line 16 to a heater 18 to further heat the feed and hydrogen to a reaction temperature. A line 20 carries the heated feed and hydrogen to a hydrotreater reactor 22 from which the hydrotreated effluent is withdrawn by a line 24 and heat exchanged against the incoming feed in exchanger 14. A line 26 carries the partially cooled hydrotreater effluent from exchanger 14 to a cooler 28. A line 30 carries the cooled hydrotreater effluent from the exchanger 32 to a separator 32. Hydrogen, light hydrocarbon gases, and some H₂S are withdrawn overhead from separator 32 by line 34 while the condensed liquids are carried by line 36 over to an adsorption section 38. The liquid hydrocarbon phase carried by line 36 enters an adsorption column 40 where it contacts an adsorbent material that adsorbs H₂S and water to accomplish H₂S removal and drying. The desulfurized and dried product is recovered by line 42 from adsorption column 40. Once the adsorbent in the adsorbent column has become loaded with H₂S and/or water, it undergoes desorption as shown for an adsorbent column 44. A hydrogen regeneration gas is heated in an exchanger 46 and carried by a line 48 into adsorption column 44. Water, H₂S and regeneration gas are taken from adsorption column 44 by line 50, cooled in cooler 52 and removed from the process. Circulation of regeneration gas through adsorption column 44 continues until there is an essentially complete removal of H₂S and water from the adsorbent material contained therein. A more complete description of feed compo-

nents, product components and the conditions in the operational zones are hereinafter described.

The feeds that will benefit from this process will contain sulfur and in many cases oxygen compounds which will interfere with downstream operations. Sulfur contaminants are present with the original crude oil fraction and include mercaptans, sulfides, disulfides and thiophenes. In the light straight-run feeds, sulfur concentrations will usually range from 20 to 300 ppm. Although light straight-run feeds generally contain few naturally occurring oxygenate compounds, contaminations from other process can introduce significant amounts of oxygenate compounds such as alcohols, ethers, aldehydes and ketones in feedstocks. These oxygenate contaminants can also be removed by the hydrotreatment process herein disclosed.

The feedstock is first mixed with a hydrogen-containing gas stream. Preferably, the gas stream will contain at least 50 wt. % hydrogen. More preferably, the hydrogen-containing gas stream will have a concentration greater than 75 wt. % hydrogen. Hydrogen-producing processes from which the gas stream is obtained can contain relatively large amounts of light hydrocarbons. These light hydrocarbons are undesirable since their presence can increase the loss of product in downstream separation facilities and increases the mass volume through downstream processes. Therefore, hydrogen-containing gas streams of relatively pure hydrogen are preferred.

The feedstocks that can be used in this invention include hydrocarbon fractions rich in C₄-C₇ paraffins. The term "rich" is defined to mean a stream having more than 50% of the mentioned component. Preferred feedstocks are substantially pure paraffin streams having from 4 to 6 carbon atoms or a mixture of such substantially pure paraffins. Other useful feedstocks include light natural gasoline, light straight-run naphtha, light raffinate, light reformate, light hydrocarbons, field butanes, and straight-run distillates having distillation end points of about 170° F. (77° C.) and containing substantial quantities of C₄-C₆ paraffins. The feedstream may also contain low concentrations of unsaturated hydrocarbons and hydrocarbons having more than 7 carbon atoms.

The gas stream is mixed with the feed in proportions that will produce a hydrogen to hydrocarbon ratio of not more than 50 SCFB (8.8 stdm³/m³). The hydrotreatment zone of this invention can be operated with hydrogen concentrations as low as 10 SCFB (1.8 stdm³/m³). A hydrogen concentration of 10 SCFB (1.8 stdm³/m³) provides hydrogen for chemical demands which, require very small amounts of hydrogen for the desulfurization and deoxygenation reactions, and sufficient hydrogen partial pressure to drive the reaction. Hydrogen concentrations above 50 SCFB (8.8 stdm³/m³) in the reaction zone interfere with the economical operation of the process.

The feed is heated and then enters a hydrotreatment reactor. Conditions within the reaction zone typically include a temperature in the range of 390°-650° F. (200°-350° C.), a pressure of from 100 to 800 kPa and a liquid hourly space velocity of from 1 to 20. Typically, the reaction conditions are selected to keep the hydrocarbon feed in a vapor phase.

The hydrotreatment reactor contains a fixed bed of hydrotreatment catalyst. Catalytic composites that can be used in this process include traditional hydrotreating catalysts. Combinations of clay and alumina-containing

metallic elements from both Group VIII and Group VIB of the Periodic Table have been found to be particularly useful. Group VIII elements include iron, cobalt, nickel, ruthenium, rhenium, palladium, osmium, indium and platinum with cobalt and nickel being particularly preferred. The Group VIB metals consist of chromium, molybdenum and tungsten, with molybdenum and tungsten being particularly preferred. The metallic components are supported on a porous carrier material. The carrier material may comprise alumina, clay or silica. Particularly useful catalysts are those containing a combination of cobalt or nickel metals from 2 to 5 wt. % and from 5 to 15 wt. % molybdenum on an alumina support. The weight percentages of the metals are calculated as though they existed in the metallic state. Typical commercial catalysts comprise spherical or extruded alumina based composites impregnated with Co-Mo or Ni-Mo in the proportions suggested above. The ABD of commercial catalysts generally range from 0.5 to 0.9 g/cc with surface areas ranging from 150 to 250 m²/g. Generally, the higher the metals content on the catalyst, the more active the catalyst.

Effluent from the hydrotreatment reactor enters one or more stages of cooling to condense most of the vapor product into a liquid phase product stream. The concentration of hydrogen in the effluent from the hydrotreater will usually be on the order of 4 mol. % and preferably will have a hydrogen concentration of 2 mol. %. Conversion of the sulfur in the hydrotreater zone will be approximately 99.9% such that essentially all the sulfur has now been converted to H₂S. For this purpose, the effluent from the hydrotreatment reactor will be cooled to a temperature of from 550° to 100° F. This cooling will cause a large portion of the H₂S and hydrogen to be absorbed in the liquid phase of the hydrotreatment effluent. In one form of this invention, the hydrogen concentration is low enough to condense essentially all of the effluent from the hydrotreatment reactor. In these cases there will be an essentially liquid phase hydrotreatment effluent stream that can be passed directly to an adsorption section for the removal of H₂S and other contaminants. In most cases, however, cooling of the hydrotreatment effluent will still leave a vapor phase portion that will consist primarily of hydrogen, H₂S, light hydrocarbons, and possibly water as well as other contaminants. The hydrocarbons in the gaseous phase will be light gases that can include C₁-C₃ hydrocarbons which may have entered with the feed or were produced by a minor degree of hydrocracking. The majority of the H₂S leaving the hydrotreater reactor will be in the liquid phase of the cooled hydrotreater effluent. Although equilibrium favors a relatively higher concentration of H₂S in the gaseous phase, the proportion of liquid to vapor in the effluent is very high so that the majority of the H₂S is in the liquid phase.

Where there is a substantial vapor phase, the cooled hydrotreater effluent will enter a separation zone. The separation zone divides the hydrogen and light gases from the liquid phase. Preferably, the separation zone will consist of a simple flash drum. The main purpose of the flash removal section is to remove light ends and any hydrogen. The flash separator is usually operated at a pressure in a range of from 250 to 450 psig. Since the H₂S is removed by adsorption in later stages, the only function of the flash separator is the removal of the hydrogen and light ends to obtain a liquid phase, hydrocarbon stream for adsorption. Since the amount of hydrogen entering the separation is low, there is only a

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.