

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
23 February 2006 (23.02.2006)

PCT


(10) International Publication Number  
**WO 2006/019710 A1**

- (51) International Patent Classification<sup>7</sup>: **H04Q 7/38**
- (21) International Application Number: PCT/US2005/024614
- (22) International Filing Date: 11 July 2005 (11.07.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
  - 60/590,113 21 July 2004 (21.07.2004) US
  - 11/020,457 22 December 2004 (22.12.2004) US
- (71) Applicant (for all designated States except US): **QUALCOMM INCORPORATED** [US/US]; 5775 Morehouse Drive, San Diego, California 92121 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SUTIVONG, Arak** [TH/US]; 8840 Costa Verde Boulevard, #3439, San Diego, California 92122 (US). **TEAGUE, Edward Harrison** [US/US]; 4614 Bryson Terrace, San Diego, California 92130 (US). **GOROKHOV, Alexei** [FR/US]; 12543 El Camino Real, San Diego, California 92130 (US).
- (74) Agents: **WADSWORTH, Philip R.** et al.; 5775 Morehouse Drive, San Diego, California 92121 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: EFFICIENT SIGNALING OVER ACCESS CHANNEL

WO 2006/019710 A1

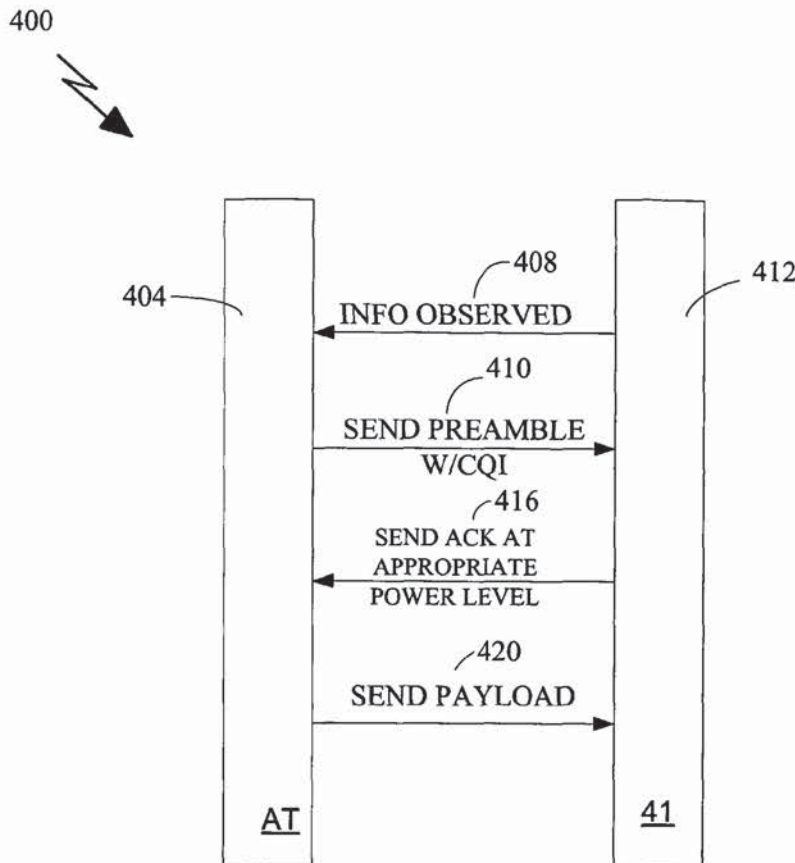

(57) Abstract: An apparatus and method for transmitting an indicator of channel quality while minimizing the use of a broadcast channel is described. A metric of forward link geometry of observed transmission signals is determined. An indicator of channel quality value is determined as a function of the observed transmission signals. An access sequence is selected, randomly, from one group of a plurality of groups of access sequences, wherein each of the plurality of groups of access sequences correspond to different ranges of channel quality values.

APPIE 1003

**Declarations under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,

GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

**Published:**

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## EFFICIENT SIGNALING OVER ACCESS CHANNEL

### CROSS-REFERENCE TO RELATED APPLICATION

- [0001] This application claims priority to U.S. Provisional Patent Application Serial No. 60/590,113, filed July 21, 2004, which is incorporated herein by reference in its entirety.

### BACKGROUND

#### Field

- [0002] The invention relates generally to wireless communications, and more specifically to data transmission in a multiple access wireless communication system.

#### Background

- [0003] An access channel is used on the reverse link by an access terminal for initial contact with an access point. The access terminal may initiate an access attempt in order to request dedicated channels, to register, or to perform a handoff, etc. Before initiating an access attempt, the access terminal receives information from the downlink channel in order to determine the strongest signal strength from nearby access points and acquire downlink timing. The access terminal is then able to decode the information transmitted by the given access point on a broadcast channel regarding choice of parameters governing the access terminal's access attempt.
- [0004] In some wireless communication systems, an access channel refers both to a probe and message being rendered. In other wireless communication systems, the access channel refers to the probe only. Once the probe is acknowledged, a message governing the access terminal's access attempt is transmitted.
- [0005] In an orthogonal frequency division multiple access (OFDMA) system, an access terminal typically separates the access transmission to be transmitted on the access channel into parts, a preamble transmission and a payload transmission. To prevent intra-cell interference due to lack of fine timing on the reverse link during the access preamble transmission, a CDM-based preamble transmission may be time-division-multiplexed with the rest of the transmissions (i.e., traffic, control, and access payload). To access the system, the access terminal then randomly selects one PN



sequence out of a group of PN sequences and sends it as its preamble during the access slot.

[0006] The access point searches for any preambles (i.e., all possible PN sequences) that may have been transmitted during the access slot. Access preamble transmission performance is measured in terms of collision probability, misdetection probability and false alarm probability. Collision probability refers to the probability that a particular pseudo-random (PN) sequence is chosen by more than one access terminal as its preamble in the same access slot. This probability is inversely proportional to the number of preamble sequences available. Misdetection probability refers to the probability that a transmitted PN sequence is not detected by the base station. False alarm probability refers to the probability that an access point erroneously declared that a preamble has been transmitted while no preamble is actually transmitted. This probability increases with the number of preambles available.

[0007] The access point then transmits an acknowledgment for each of the preambles detected. The acknowledgement message may include a PN sequence detected, timing offset correction, and index of the channel for access payload transmission. Access terminal terminals whose PN sequence is acknowledged can then transmit the respective access payload using the assigned resource.

[0008] Because the access point has no prior knowledge of where the access terminal is in the system (i.e. what its power requirements, buffer level, or quality of service may be), the acknowledgement message is broadcasted at a power level high enough such that all access terminals in the given cell can decode the message. The broadcast acknowledgement is inefficient as it requires a disproportionate amount of transmit power and/or frequency bandwidth to close the link. Thus, there is a need to more efficiently send an acknowledgment message to access terminals in a given cell.

### SUMMARY

[0009] Embodiments of the invention minimize use of a broadcast acknowledgement channel during its preamble transmission. Embodiments of the invention further addresses how information regarding forward link channel quality can be efficiently signaled over the access channel during access preamble transmission.

In one embodiment, an apparatus and method for transmitting an indicator of channel quality minimizing the use of a broadcast channel is described. A metric of

forward link geometry of observed transmission signals is determined. An indicator of channel quality value is determined as a function of the observed transmission signals. An access sequence is selected, randomly, from one group of a plurality of groups of access sequences, wherein each of the plurality of groups of access sequences correspond to different ranges of channel quality values.

[0010] The metric of forward link geometry may be determined as a function of observed pilot signals, noise, and/or traffic on data channels. The quantity of access sequences in the plurality of groups access sequences are distributed non-uniformly. In an embodiment, the access sequences are distributed to reflect the distribution of access terminals about the access point. In another embodiment, the access sequences are distributed in proportion to the number of access terminals that need a given amount of power needed to send an indicator of acknowledgment to the access terminal.

[0011] In another embodiment, a method of partitioning a plurality of access sequences, is described. A probability distribution of a plurality of access terminals about an access point is determined. The probability distribution is determined as a function of a plurality of access terminals having CQI values within a predetermined ranges. Groups of access sequences are assigned in proportion to the probability distribution. Access sequences can be reassigned as a function of a change in distribution of access terminals about the access point.

[0012] In yet another embodiment, an apparatus and method of transmitting an acknowledgement of a detected access sequence is described. An access sequence is received. The access sequence can be looked-up in a look-up table, stored in memory, to determine at least one attribute of the given access terminal (as a function of the access sequence). The attribute can be information such as a channel quality indicator, a buffer level and a quality of service indicator. Information is then transmitted to the access terminal, where the information is commensurate and consistent with the attribute. Information transmitted may include an indicator of acknowledgment. The indicator of acknowledgment may be transmitted over a shared signalling channel (SSCH).

[0013] Various aspects and embodiments of the invention are described in further detail below.



# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

## LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

## FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.