



INTERNATIONAL TELECOMMUNICATION UNION

**ITU-T**

**V.22**

TELECOMMUNICATION  
STANDARDIZATION SECTOR  
OF ITU

**DATA COMMUNICATION  
OVER THE TELEPHONE NETWORK**

---

**1200 BITS PER SECOND DUPLEX MODEM  
STANDARDIZED FOR USE IN THE GENERAL  
SWITCHED TELEPHONE NETWORK AND  
ON POINT-TO-POINT 2-WIRE LEASED  
TELEPHONE-TYPE CIRCUITS**

**ITU-T Recommendation V.22**

(Extr

Qualcomm Incorporated v. Rembrandt Wireless Techs. LP.

IPR2020-00510



INTERNATIONAL TELECOMMUNICATION UNION

# ITU-T

# V.22

TELECOMMUNICATION  
STANDARDIZATION SECTOR  
OF ITU

## DATA COMMUNICATION OVER THE TELEPHONE NETWORK

---

**1200 BITS PER SECOND DUPLEX MODEM  
STANDARDIZED FOR USE IN THE GENERAL  
SWITCHED TELEPHONE NETWORK AND  
ON POINT-TO-POINT 2-WIRE LEASED  
TELEPHONE-TYPE CIRCUITS**

**ITU-T Recommendation V.22**

(Extract from the *Blue Book*)

## NOTES

1 ITU-T Recommendation V.22 was published in Fascicle VIII.1 of the *Blue Book*. This file is an extract from the *Blue Book*. While the presentation and layout of the text might be slightly different from the *Blue Book* version, the contents of the file are identical to the *Blue Book* version and copyright conditions remain unchanged (see below).

2 In this Recommendation, the expression “Administration” is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

© ITU 1988, 1993

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the ITU.

## Recommendation V.22

### 1200 BITS PER SECOND DUPLEX MODEM STANDARDIZED FOR USE IN THE GENERAL SWITCHED TELEPHONE NETWORK AND ON POINT-TO-POINT 2-WIRE RELEASED TELEPHONE-TYPE CIRCUITS

(Geneva, 1980; amended at Malaga- Torremolinos, 1984; and at Melbourne, 1988)

#### 1 Introduction

1.1 This modem is intended for use on connections on General Switched Telephone Networks (GSTNs), and on point-to-point circuits when suitably conditioned.

The principal characteristics of this modem are as follows:

- a) duplex operation on 2-wire GSTN and point-to-point leased circuits,
- b) channel separation by frequency division,
- c) differential phase shift modulation for each channel with synchronous line transmission at 600 bauds (nominal),
- d) inclusion of a scrambler,
- e) inclusion of test facilities.

1.2 Recognizing the wide range of application, this Recommendation provides for three alternative configurations. The choice of alternative is a matter for the Administration concerned. The facilities given by the alternatives are:

##### *Alternative A*

1200 bit/s synchronous  
600 bit/s synchronous (optional)

##### *Alternative B*

1200 bit/s synchronous }  
600 bit/s synchronous (optional) } as in Alternative A

1200 bit/s start-stop  
600 bit/s start-stop (optional)

##### *Alternative C*

1200 bit/s synchronous }  
600 bit/s synchronous (optional) } as in Alternative B  
1200 bit/s start-stop }  
600 bit/s start-stop (optional) }

An asynchronous mode having capability of handling 1200 bit/s start-stop and asynchronous data at up to 300 bit/s.

The selection of the asynchronous mode is made during the handshaking sequence (see § 6). This gives compatibility between Alternative B and Alternative C.

*Note* - The possibility of transmitting low speed anisochronous data in Alternatives A and B is left for further study.

## 2 Line signals

### 2.1 Carrier and guard tone frequencies

The carrier frequencies shall be  $1200 \pm 0.5$  Hz for the low channel and  $2400 \pm 1$  Hz for the high channel. A guard tone of  $1800 \text{ Hz} \pm 20$  Hz, to be transmitted only when the modem is transmitting in the high channel, may be disabled as a national option. An alternative guard tone of  $550 \pm 20$  Hz may be incorporated as a national option. The question of international calls between countries requiring different guard tones is left for further study.

### 2.2 Data and guard tone line signal levels

The 1800-Hz guard tone shall be at a level of  $6 \pm 1$  dB below the level of the data power in the high channel. The level of the optional 550 Hz tone is for further study. The total power transmitted to line shall be in accordance with Recommendation V.2 and shall be the same for transmission in either channel. Because of the 1800-Hz guard tone, the power level of data signals in the high channel will be approximately 1 dB lower than data signals in the low channel.

### 2.3 Fixed compromise equalizer

Fixed compromise equalization shall be incorporated in the modem. Such equalization shall be equally shared between transmitter and receiver. The characteristics of the equalizer shall be the responsibility of each Administration to recommend nationally. The possibility of producing compromise characteristics for international implementation is for further study.

### 2.4 Spectrum and group-delay characteristic

After making allowance for the nominal specified compromise equalizer characteristic, the transmitted line signal shall have a frequency spectrum equivalent to the square root of a raised cosine shaping with a 75% roll-off and within the limits of Figure 1/V.22. Similarly, the group delay of the transmitter output shall be within  $\pm 150$  microseconds over the frequency range 900 Hz-1500 Hz (low channel) and 2100 Hz-2700 Hz (high channel). These figures are provisional.

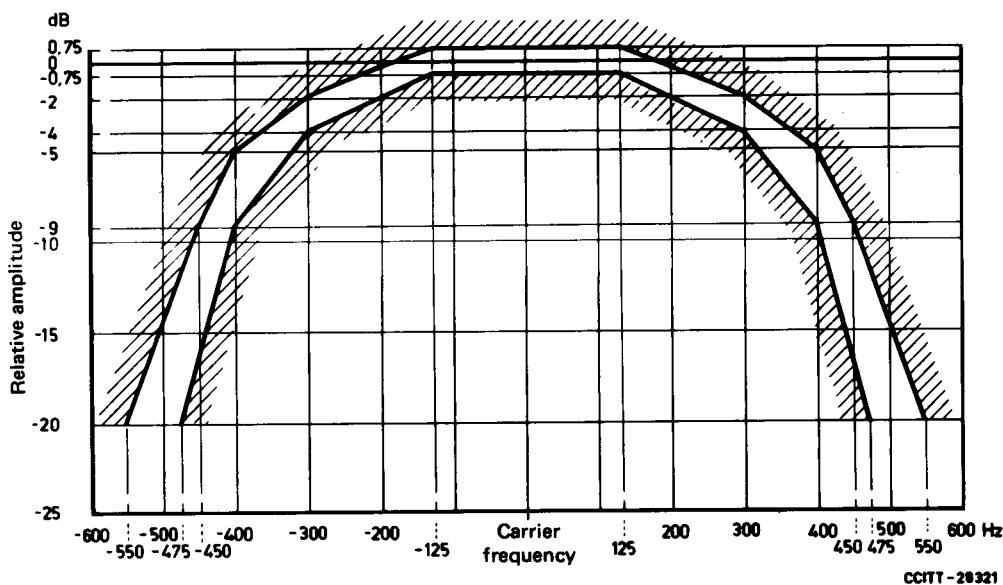


FIGURE 1/V.22

Amplitude limits for transmitted line signal (unequalized)

# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

## LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

## FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.