

# MOTHERSON EXHIBIT 1012

[39-245](#)[Go to Bottom](#)[Index](#)

# Rapid Design through Virtual and Physical Prototyping

[Carnegie Mellon University](#)

---

## Introduction to Mechanisms

Yi Zhang  
with  
[Susan Finger](#)  
Stephannie Behrens

[Table of Contents](#)

### 4 Basic Kinematics of Constrained Rigid Bodies

#### 4.1 Degrees of Freedom of a Rigid Body

##### 4.1.1 Degrees of Freedom of a Rigid Body in a Plane

The *degrees of freedom* (DOF) of a rigid body is defined as the number of independent movements it has. Figure 4-1 shows a rigid body in a plane. To determine the DOF of this body we must consider how many distinct ways the bar can be moved. In a two dimensional plane such as this computer screen, there are 3 DOF. The bar can be *translated* along the  $x$  axis, translated along the  $y$  axis, and *rotated* about its centroid.




Figure 4-1 Degrees of freedom of a rigid body in a plane

##### 4.1.2 Degrees of Freedom of a Rigid Body in Space

An unrestrained rigid body in space has six degrees of freedom: three translating motions along the  $x$ ,  $y$  and  $z$  axes and three rotary motions around the  $x$ ,  $y$  and  $z$  axes respectively.




Figure 4-2 Degrees of freedom of a rigid body in space

Two or more rigid bodies in space are collectively called a *rigid body system*. We can hinder the motion of these independent rigid bodies with **kinematic constraints**. *Kinematic constraints* are constraints between rigid bodies that result in the decrease of the degrees of freedom of rigid body system.

The term [kinematic pairs](#) actually refers to *kinematic constraints* between rigid bodies. The kinematic pairs are divided into [lower pairs](#) and [higher pairs](#), depending on how the two bodies are in contact.

#### 4.2.1 Lower Pairs in Planar Mechanisms

There are two kinds of lower pairs in planar mechanisms: [revolute pairs](#) and [prismatic pairs](#).

A rigid body in a plane has only three independent motions -- two translational and one rotary -- so introducing either a revolute pair or a prismatic pair between two rigid bodies removes two degrees of freedom.




Figure 4-3 A planar revolute pair (R-pair)




Figure 4-4 A planar prismatic pair (P-pair)

#### 4.2.2 Lower Pairs in Spatial Mechanisms

There are six kinds of lower pairs under the category of [spatial mechanisms](#). The types are: [spherical pair](#), [plane pair](#), [cylindrical pair](#), [revolute pair](#), [prismatic pair](#), and [screw pair](#).




Figure 4-5 A spherical pair (S-pair)

A *spherical pair* keeps two spherical centers together. Two rigid bodies connected by this constraint will be able to *rotate* relatively around  $x$ ,  $y$  and  $z$  axes, but there will be no relative translation along any of these axes. Therefore, a spherical pair removes three degrees of freedom in spatial mechanism. **DOF = 3**.






Figure 4-6 A planar pair (E-pair)

A *plane pair* keeps the surfaces of two rigid bodies together. To visualize this, imagine a book lying on a table where it can move in any direction except off the table. Two rigid bodies connected by this kind of pair will have two independent translational motions in the plane, and a rotary motion around the axis that is perpendicular to the plane. Therefore, a plane




**Figure 4-7 A cylindrical pair (C-pair)**

A *cylindrical pair* keeps two axes of two rigid bodies aligned. Two rigid bodies that are part of this kind of system will have an independent translational motion along the axis and a relative rotary motion around the axis. Therefore, a cylindrical pair removes four degrees of freedom from spatial mechanism. **DOF = 2.**




**Figure 4-8 A revolute pair (R-pair)**

A *revolute pair* keeps the axes of two rigid bodies together. Two rigid bodies constrained by a revolute pair have an independent rotary motion around their common axis. Therefore, a revolute pair removes five degrees of freedom in spatial mechanism. **DOF = 1.**



**Figure 4-9 A prismatic pair (P-pair)**

A *prismatic pair* keeps two axes of two rigid bodies align and allow no relative rotation. Two rigid bodies constrained by this kind of constraint will be able to have an independent translational motion along the axis. Therefore, a prismatic pair removes five degrees of freedom in spatial mechanism. **DOF = 1.**



**Figure 4-10 A screw pair (H-pair)**

The *screw pair* keeps two axes of two rigid bodies aligned and allows a relative screw motion. Two rigid bodies constrained by a screw pair a motion which is a composition of a translational motion along the axis and a corresponding rotary motion around the axis. Therefore, a screw pair removes five degrees of freedom in spatial mechanism.

### 4.3 Constrained Rigid Bodies

Rigid bodies and kinematic constraints are the basic components of mechanisms. A constrained rigid body system can be a [kinematic chain](#), a [mechanism](#), a structure, or none of these. The influence of kinematic constraints in the motion of rigid bodies has two intrinsic aspects, which are the geometrical and physical aspects. In other words, we can analyze the motion of the constrained rigid bodies from their geometrical relationships or using [Newton's Second Law](#).


A mechanism is a constrained rigid body system in which one of the bodies is the [frame](#). The degrees of freedom are important when considering a constrained rigid body system that is a mechanism. It is less crucial when the system is a structure or when it does not have definite motion.

Calculating the degrees of freedom of a rigid body system is straight forward. Any unconstrained rigid body has six degrees of freedom in space and three degrees of freedom in a plane. Adding kinematic constraints between rigid bodies will correspondingly decrease the degrees of freedom of the rigid body system. We will discuss more on this topic for planar mechanisms in the next section.

## 4.4 Degrees of Freedom of Planar Mechanisms

### 4.4.1 Gruebler's Equation

The definition of the *degrees of freedom* of a mechanism is the number of independent relative motions among the rigid bodies. For example, [Figure 4-11](#) shows several cases of a rigid body constrained by different kinds of pairs.

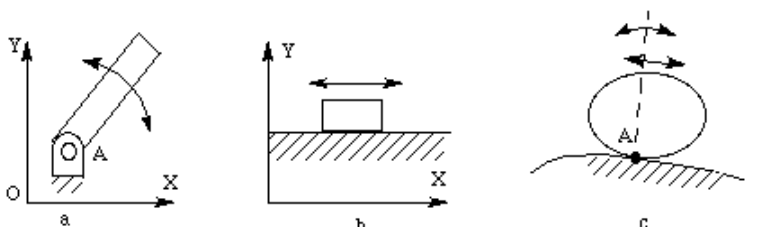


**Figure 4-11 Rigid bodies constrained by different kinds of planar pairs**

In Figure 4-11a, a rigid body is constrained by a [revolute pair](#) which allows only rotational movement around an axis. It has one degree of freedom, turning around point A. The two lost degrees of freedom are translational movements along the  $x$  and  $y$  axes. The only way the rigid body can move is to rotate about the fixed point A.

In Figure 4-11b, a rigid body is constrained by a [prismatic pair](#) which allows only translational motion. In two dimensions, it has one degree of freedom, translating along the  $x$  axis. In this example, the body has lost the ability to rotate about any axis, and it cannot move along the  $y$  axis.

In Figure 4-11c, a rigid body is constrained by a [higher pair](#). It has two degrees of freedom: translating along the curved surface and turning about the instantaneous contact point.

In general, a rigid body in a plane has three degrees of freedom. Kinematic pairs are constraints on rigid bodies that reduce the degrees of freedom of a mechanism. Figure 4-11 shows the three kinds of pairs in [planar mechanisms](#). These [pairs](#) reduce the number of the degrees of freedom. If we create a [lower pair](#) (Figure 4-11a,b), the degrees of freedom are reduced to 2. Similarly, if we create a [higher pair](#) (Figure 4-11c), the degrees of freedom are reduced to 1.

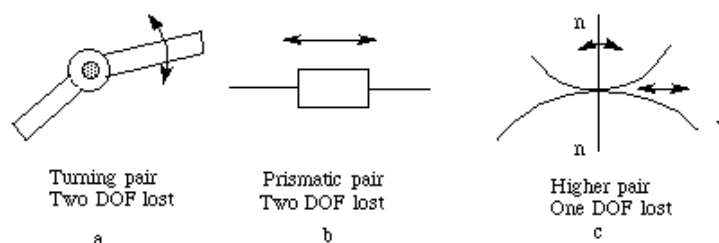

**Figure 4-12 Kinematic Pairs in Planar Mechanisms**

Therefore, we can write the following equation:

$$(4-1) \quad F = 3(n - 1) - 2l - h$$

Where

$F$  = total degrees of freedom in the mechanism

# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

## LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

## FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.