

## PREAMBLE (NOT PART OF THE STANDARD)

In order to promote public education and public safety, equal justice for all, a better informed citizenry, the rule of law, world trade and world peace, this legal document is hereby made available on a noncommercial basis, as it is the right of all humans to know and speak the laws that govern them.

## END OF PREAMBLE (NOT PART OF THE STANDARD)

**SAE** The Engineering Society  
For Advancing Mobility  
Land Sea Air and Space®  
**INTERNATIONAL**  
400 Commonwealth Drive, Warrendale, PA 15096-0001

## SURFACE VEHICLE INFORMATION REPORT

**SAE**, J1733 ISSUED DEC 94

Issued 1994-12

Submitted for recognition as an American National Standard

## SIGN CONVENTION FOR VEHICLE CRASH TESTING

**Foreword**—This Document has not changed other than to put it into the new SAE Technical Standards Board Format.

**1. Scope**—In order to compare test results obtained from different crash test facilities, standardized coordinate systems need to be defined for crash test dummies, vehicle structures, and laboratory fixtures. In addition, recorded polarities for various transducer outputs need to be defined relative to positive directions of the appropriate coordinate systems. This SAE Information Report describes the standardized sign convention and recorded output polarities for various transducers used in crash testing.

## 2. References

**2.1 Applicable Publications**—The following publications form a part of the specification to the extent specified herein. Unless otherwise indicated the latest revision of SAE publications shall apply.

2.1.1 SAE PUBLICATIONS—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

SAE 211—Instrumentation for Impact Test  
SAE J670—Vehicle Dynamics Terminology  
SAE J1594—Vehicle Aerodynamics Terminology  
SAE J2052—Test Device Head Contact Duration Analysis

**3. Right-Handed Coordinate System**—A right-handed coordinate system consists of an ordered set of three mutually perpendicular axes ( $x$ ,  $y$ ,  $z$ ) which have a common origin and whose positive directions point in the same directions as the ordered set of the thumb, forefinger, and middle finger of the right hand when positioned as shown in Figure 1. One can choose the positive  $x$ -axis to point in the direction of either the thumb, forefinger, or middle finger as shown in the configurations 1, 2, and 3 of Figure 1. However, once this decision is made then the positive directions of the  $y$  and  $z$  axes must be as indicated by the corresponding configuration shown in Figure 1. Note that these three configurations of  $x$ ,  $y$ ,  $z$  axes always define a right-handed coordinate system independent of the orientation of the Sections 4 and 5 will define standardized orientations of coordinate systems for the vehicle and dummy, respectively.

SAE Technical Standards Board Rules Provide that: "This report is published by SAT to advance the state of technical and engineering. The use of this report is entirely voluntary, and its application and suitability for any particular use, including any patent infringement therefrom, is the sole responsibility of the user."

SAT reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

QUESTION REGARDING THIS DOCUMENT: (724) 772-8512 FAX: (724) 776-0243  
TO PLACE A DOCUMENT ORDER: (724) 776-4970 FAX: (724) 776-0790  
SAE WEB ADDRESS <http://www.sae.org>

Copyright 1994 Society of Automotive Engineers, Inc.  
All rights reserved.

Printed In U.S.A

1

Positive angular motion and moment directions are determined by the right-handed screw rule. If any of the three positive axes is grasped with the right hand with the thumb extended in the positive direction, as shown in Figure 2 for the  $x$ -axis, then the curl of the fingers indicate the positive direction for angular motions and moments with respect to that axis.

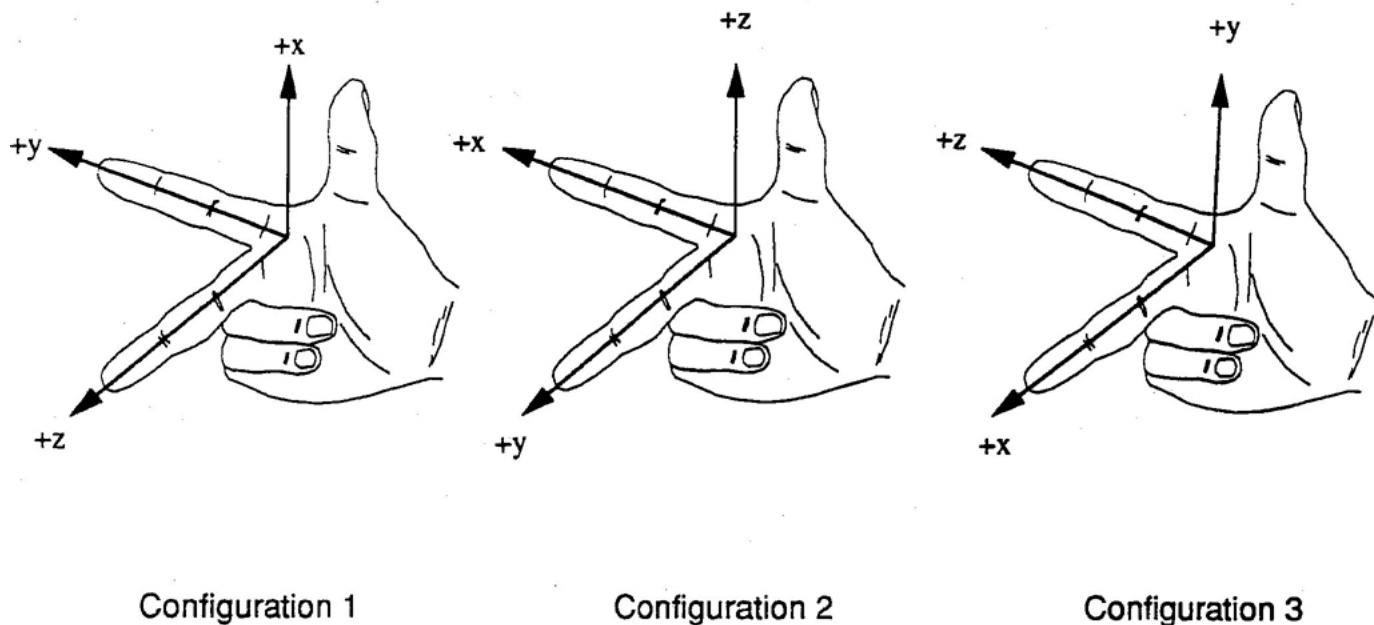


FIGURE 1—THE THREE POSSIBLE CONFIGURATIONS OF A RIGHT-HANDED COORDINATE SYSTEM RELATIVE TO THE THUMB, FOREFINGER, AND MIDDLE FINGER OF THE RIGHT HAND

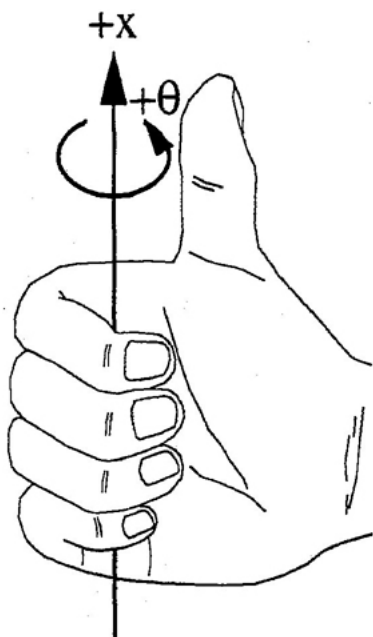


FIGURE 2—RIGHT-HANDED SCREW RULE

2

A simple method to determine if a coordinate system is right-handed is to rotate the system 90 degrees about any of one of its positive axes using the right-handed screw rule. For a positive 90 degrees rotation about the +x-axis, the coordinate system is right-handed if the +y-axis rotates to the position previously occupied by the +z-axis. For a positive 90 degrees rotation about the +y-axis, the coordinate system is right-handed if the +z-axis, rotates to the position previously occupied by the +x-axis. For a positive 90 degrees rotation about the +z-axis, the coordinate system is right-handed if the +x-axis rotates to the position previously occupied by the +y-axis.

**4. Vehicle Coordinate Systems**—Vehicle coordinate systems will be consistent with the orientations specified in SAE J670 and SAE J1594. These orientations are shown in Figures 3 and 4, respectively. For structures within the vehicle that have a principle axis of motion such as the steering wheel column, the vehicle coordinate system may be rotated about the y-axis such that the +x-axis or +z-axis is directed along the column axis.

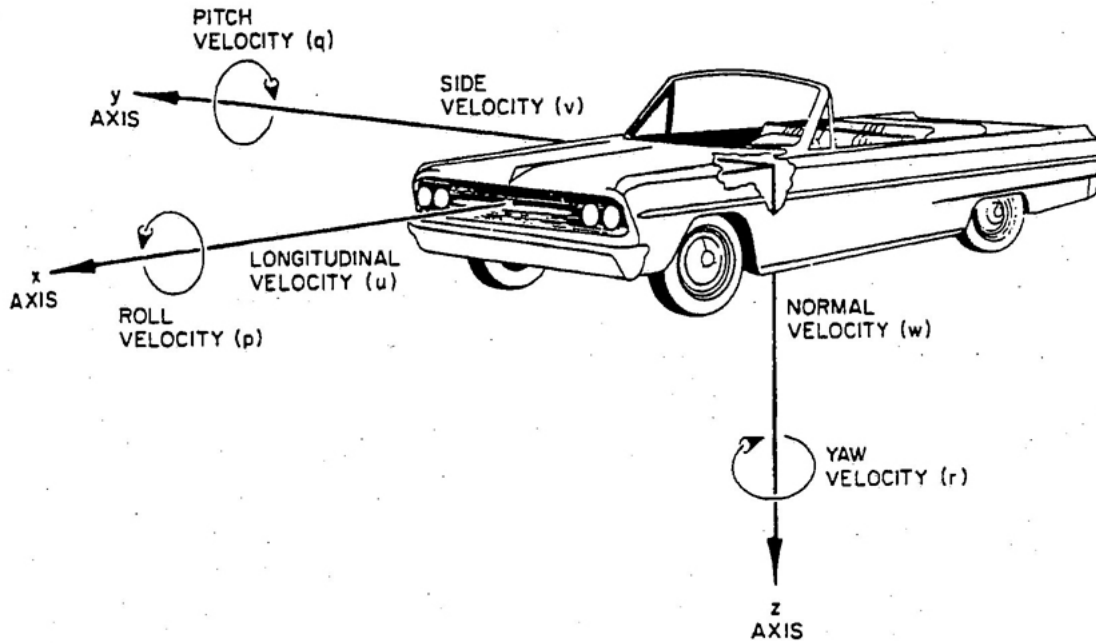


FIGURE 3—VEHICLE DYNAMICS COORDINATE SYSTEM—SAE J760

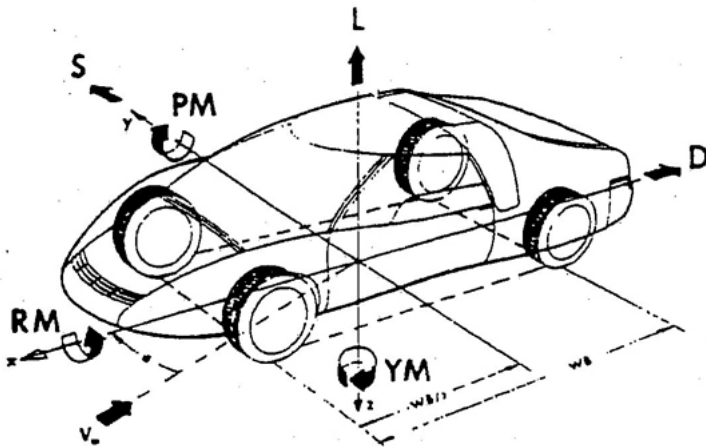


FIGURE 4—VEHICLE AERODYNAMICS COORDINATE SYSTEM—SAE J1594

3

**5. Dummy Coordinate Systems**—The definition of the dummy coordinate system given in SAE J211 will be used. A coordinate system can be affixed to any point on the dummy. The coordinate system will translate and/or rotate with the dummy part to which it is attached during the test. To define standard orientations of the directed forward, the +y-axis will be directed from the dummy's left to its right side and the +z-axis will be anterior (P-A), the +y-axis is directed from left to right (L-R), and the +z-axis is directed from superior to inferior (S-I). Figure 5 shows examples of this standardized orientation for coordinate systems attached to a few body points. Note that as the dummy is articulated to sit in a vehicle or during a test the coordinate systems rotate with their respective dummy parts.

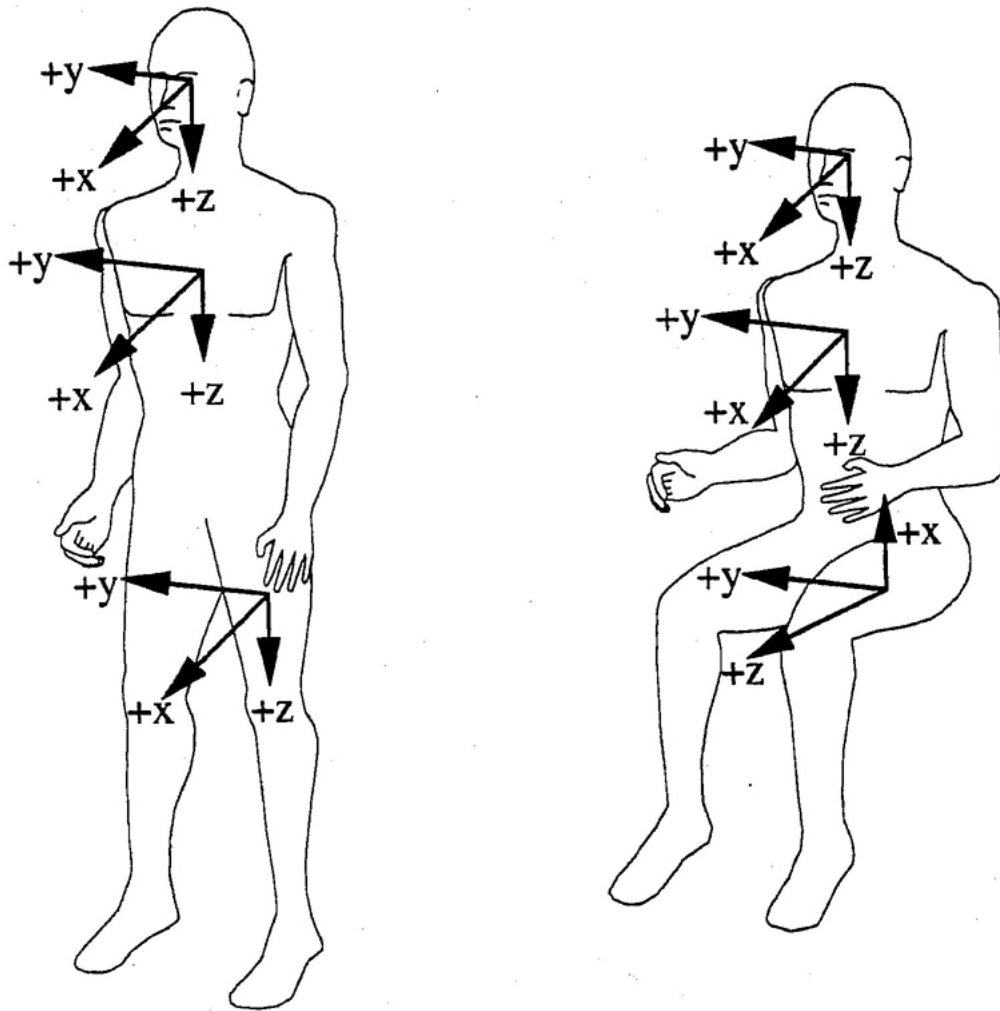


FIGURE 5—ORIENTATIONS OF STANDARDIZED DUMMY COORDINATE SYSTEMS FOR STANDING AND SEATED POSTURES

4

#### 6. Standard Polarities for Recorded Dummy Measurements

**6.1 Polarities of Acceleration, Velocity, and Displacement**—Positive recorded outputs for these transducers are to be consistent with the positive axes of the coordinate system defined for the specific dummy or vehicle point being measured. In general, for any dummy component oriented in its standard standing position, blows to its back side, left side, and top will produce positive accelerations relative to its +x, +y, and +z directions, respectively. As illustrated in Figure 6, a blow to the back of the dummy's head produces an acceleration in the forward direction (+x) which should be recorded as a positive acceleration. A blow to the top of the head produces a +z acceleration. A blow to the left side of the head produces a +y acceleration. Note that since the SID dummy is only instrumented to measure accelerations, the polarities of its transducers are determined by the methods described in this section.

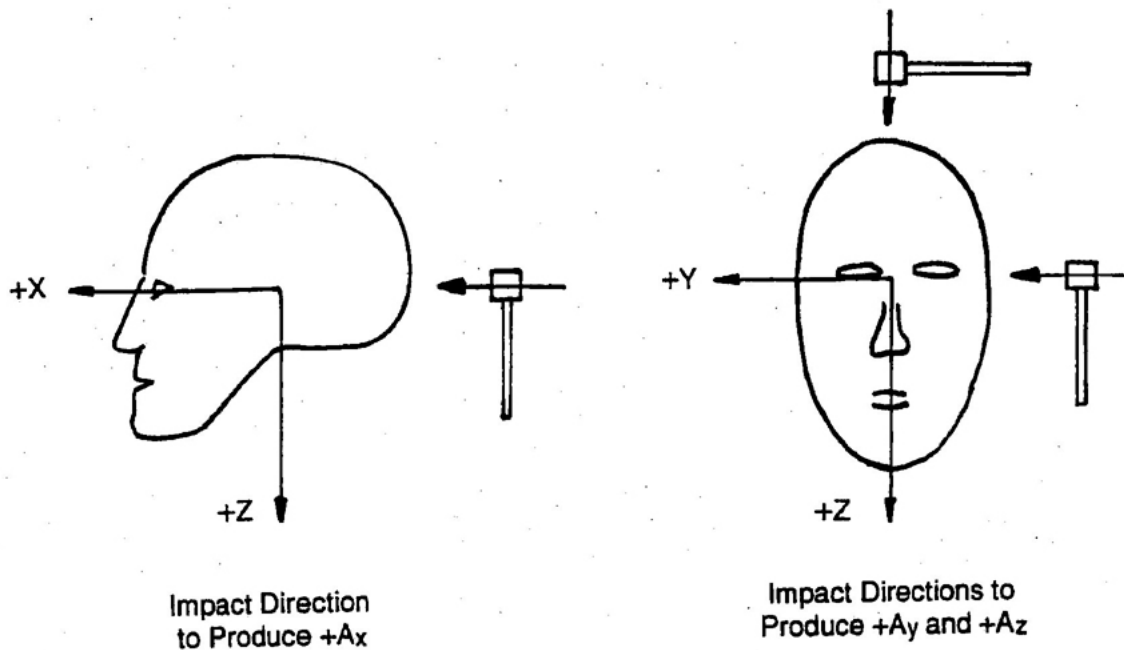


FIGURE 6—HEAD IMPACT DIRECTIONS THAT PRODUCE POSITIVE HEAD ACCELERATIONS RELATIVE TO THE HEAD COORDINATE SYSTEM

For relative displacement of body parts, the coordinate system of interest must be defined. For example, frontal chest compression is the distance that the sternum moves relative to the thoracic spine. In this case, the coordinate system is fixed to the thoracic spine. When the sternum moves closer to the spine, its displacement is rearward relative to the spine which is in the negative x-direction. Hence, the polarity for chest displacement of the impacted ribs relative to the thoracic spine. However, a blow to the right side of the chest produces a negative rib displacement. The directions of these chest compressions are illustrated in Figure 7. The rearward displacement of the tibia relative to the femur that is measured by the knee shear transducer is in the negative x-direction. The polarity for this motion is negative.

5

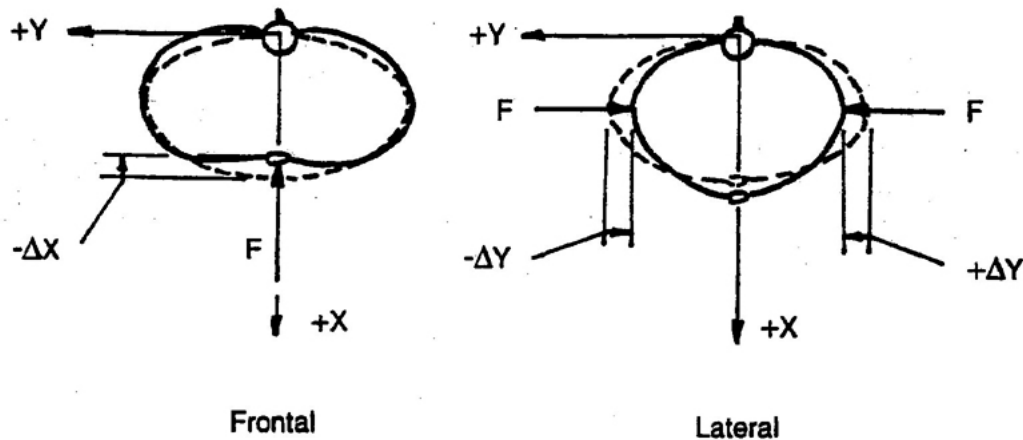


FIGURE 7—DIRECTIONS OF FRONTAL AND LATERAL CHEST COMPRESSIONS

**6.2 Polarities of Measured External Loads**— For load cells that measure loads applied directly to the dummy or vehicle structure, their recorded output polarities should be consistent with the direction of the applied external load referenced to the standardized coordinate system at the point of the load application. For example, load cells that measure shoulder belt loading of the clavicle are designed to measure  $F_x$  and  $F_z$  applied to the clavicle. The rearward ( $-x$ ) component of the shoulder belt force applied to the clavicle should be recorded with a negative polarity. The downward ( $-z$ ) component should have a positive polarity. For the BIOSID, a lateral inward load applied to the crest of the left ilium ( $+y$ ) would be positive, while a lateral inward load applied to the crest of the right ilium ( $-y$ ) would be negative.

**6.3 Polarities of Measured internal Loads**—Defining recorded output polarities for load cells that measure loads internal to the dummy requires a standardized dummy sectioning scheme and a definition of what sectioned dummy part is to be loaded in the positive direction since internal loads occur in pairs of equal magnitudes but opposite directions. The standardized sectioning scheme is illustrated by the free-body diagram of a cube shown in Figure 8. It is assumed that the load cell of interest is contained within the cube and responds to loads applied to the surfaces of the cube. Load cell outputs should be recorded with positive polarities when normal loads, shear loads, torques, or moments are applied in the positive direction, as defined by the standardized coordinate system, to the right, front, and/or bottom surfaces of the cube. These loads are represented by solid arrows. For static equilibrium, equal magnitude but opposite direction loads (negative) must be applied to the left, back, and/or top surfaces of the cube as indicated by the dashed arrows.

For example, upper and lower neck, lumbar spine, and upper and lower tibia load cells should have positive recorded outputs when the dummy is sectioned

# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

## LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

## FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.