



US007046649B2

(12) **United States Patent**
Awater et al.

(10) **Patent No.:** **US 7,046,649 B2**
(45) **Date of Patent:** **May 16, 2006**

(54) **INTEROPERABILITY FOR
BLUETOOTH/IEEE 802.11**
(75) Inventors: **Geert Arnout Awater**, Utrecht (NL);
Ran-Hong Yan, Farington (GB)
(73) Assignee: **Agere Systems Inc.**, Allentown, PA
(US)

5,903,548 A	5/1999	Delamater	370/310
5,960,344 A	9/1999	Mahany	455/432
6,326,926 B1 *	12/2001	Shoobridge et al.	343/702
6,526,264 B1 *	2/2003	Sugar et al.	455/84
6,560,443 B1 *	5/2003	Vaisanen et al.	455/73
6,600,726 B1 *	7/2003	Nevo et al.	370/278
6,717,801 B1 *	4/2004	Castell et al.	361/683
6,842,607 B1 *	1/2005	Godfrey et al.	455/41.2

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 761 days.

FOREIGN PATENT DOCUMENTS

WO WO 99/29126 6/1999

OTHER PUBLICATIONS

European Search Report, dated Jun. 27, 2000.

(21) Appl. No.: **09/761,074**

(22) Filed: **Jan. 16, 2001**

(65) **Prior Publication Data**
US 2001/0010689 A1 Aug. 2, 2001

* cited by examiner

Primary Examiner—Andrew C. Lee
Assistant Examiner—Soon D. Hyun

(30) **Foreign Application Priority Data**
Jan. 20, 2000 (EP) 00300397

(57) **ABSTRACT**

(51) **Int. Cl.**
H04Q 7/24 (2006.01)
(52) **U.S. Cl.** **370/338; 370/341; 370/347**
(58) **Field of Classification Search** 370/277,
370/278, 280, 282, 294, 310, 339, 345, 349,
370/352, 389, 466, 468, 498, 478, 344, 347,
370/328, 338, 337, 465; 455/78, 83
See application file for complete search history.

The key of the invention is to introduce an interoperability device in a communication system which integrates an IEEE 802.11 transceiver and a Bluetooth transceiver. The device prevents that one transceiver is transmitting while the other is receiving, which would cause interference at the receiving transceiver. In addition, the device preferably prevents that both systems are transmitting at the same time to avoid interference at the receiving device(s). Optionally the device prohibits simultaneous reception of both transceivers. In that way the radio receiver can be shared between the devices, allowing a cheaper and smaller hardware design.

(56) **References Cited**
U.S. PATENT DOCUMENTS
4,876,743 A * 10/1989 Lindenmeier et al. 455/133

44 Claims, 3 Drawing Sheets

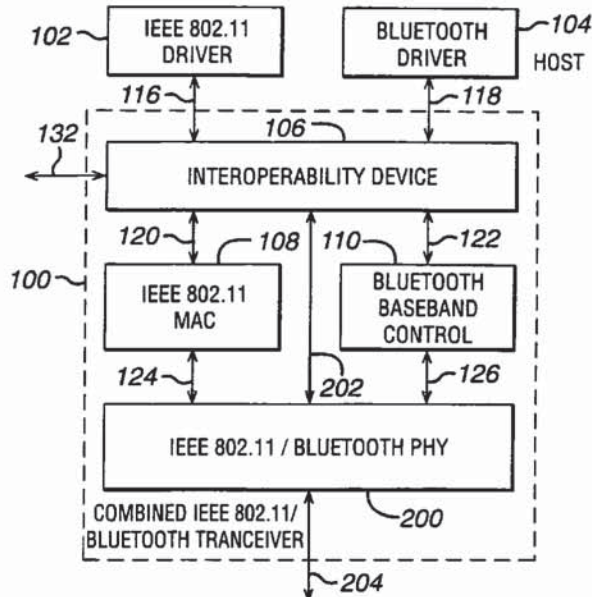


FIG. 1

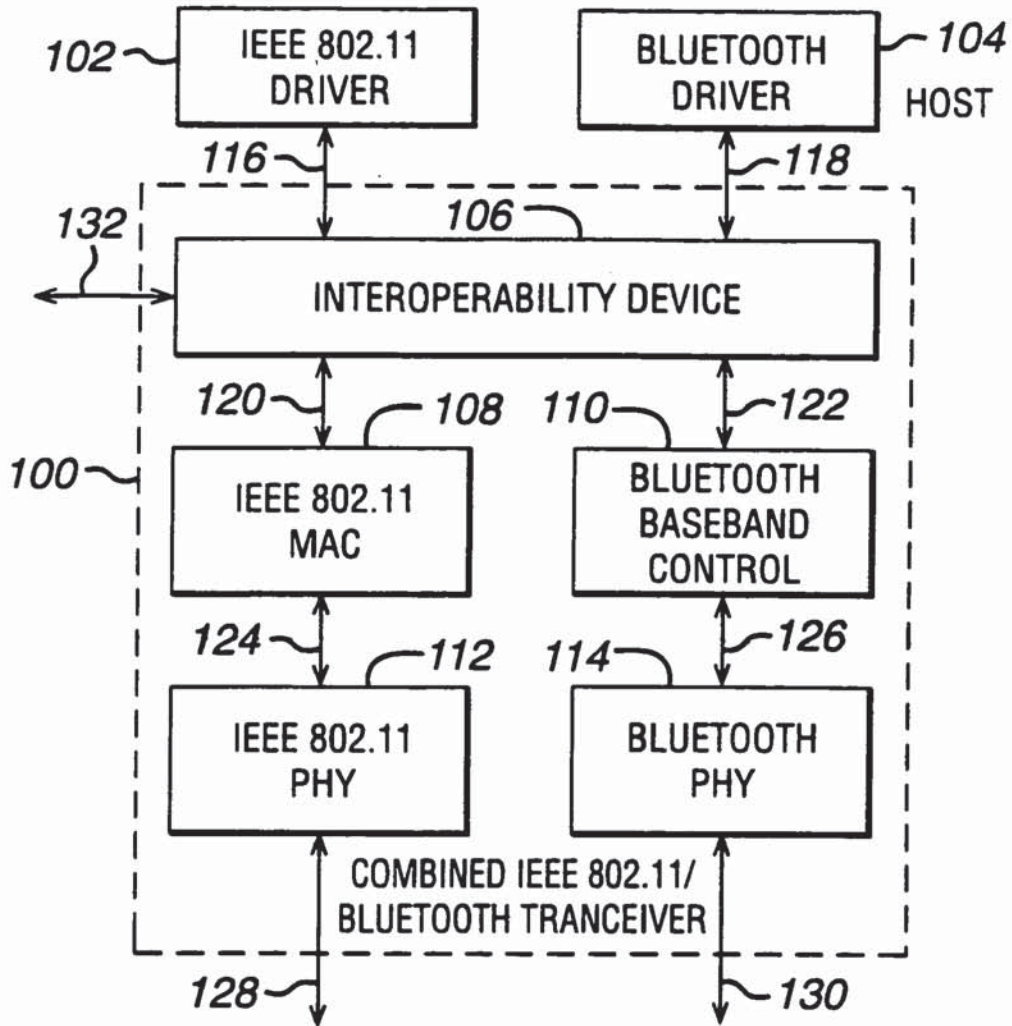


FIG. 3

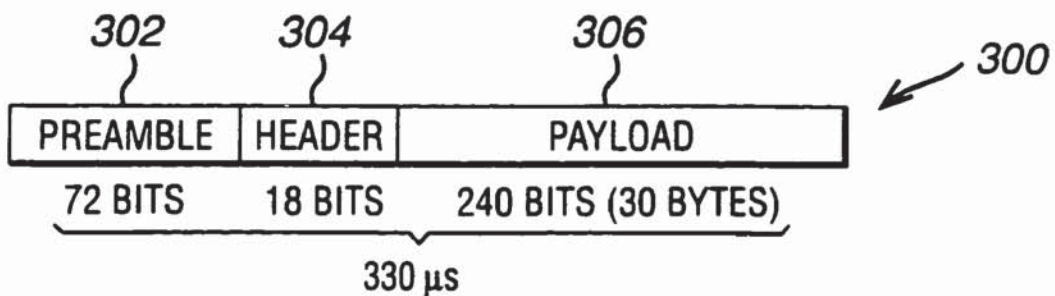


FIG. 2

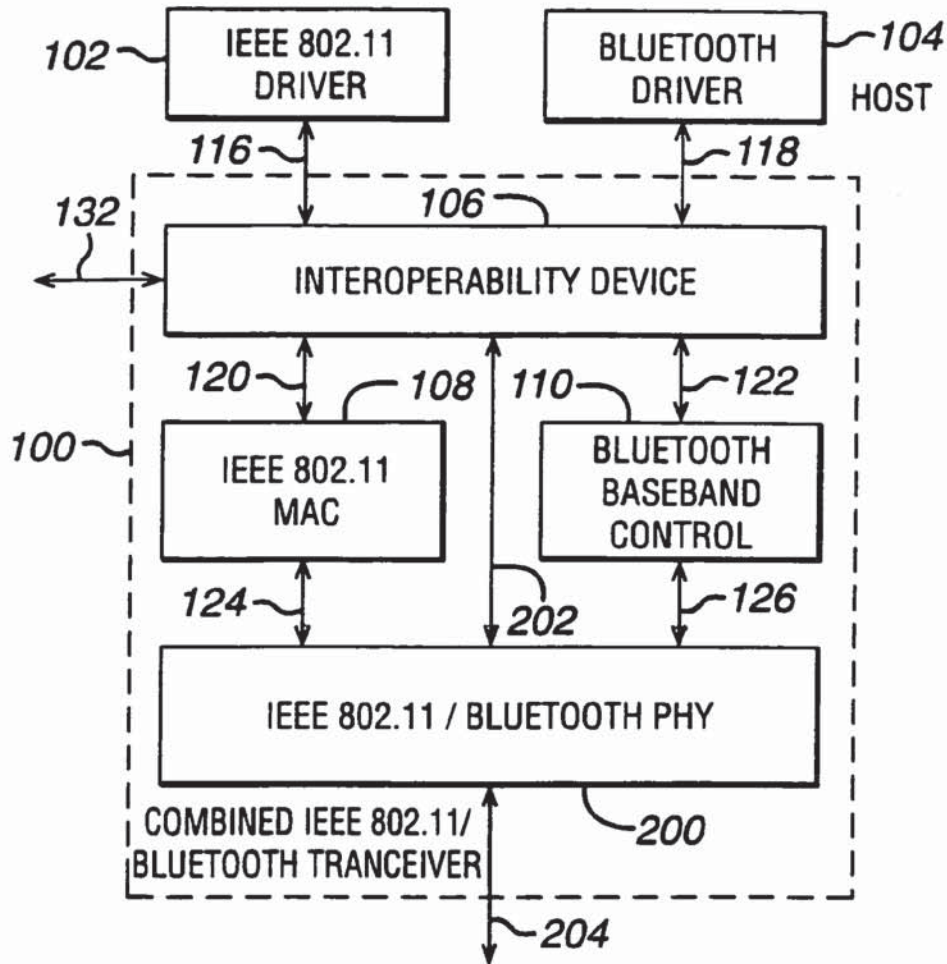


FIG. 5

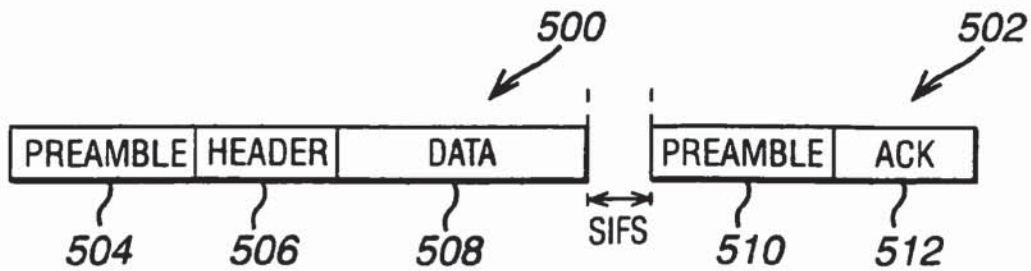


FIG. 4


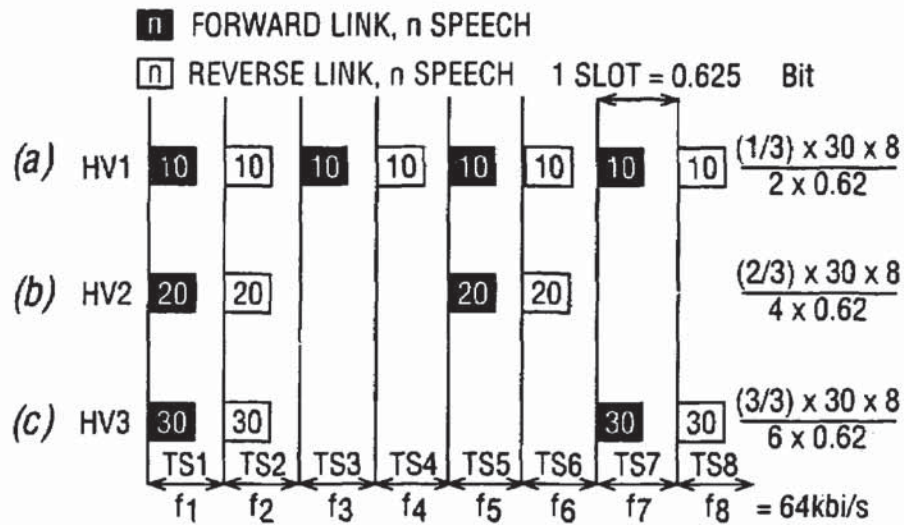


FIG. 6

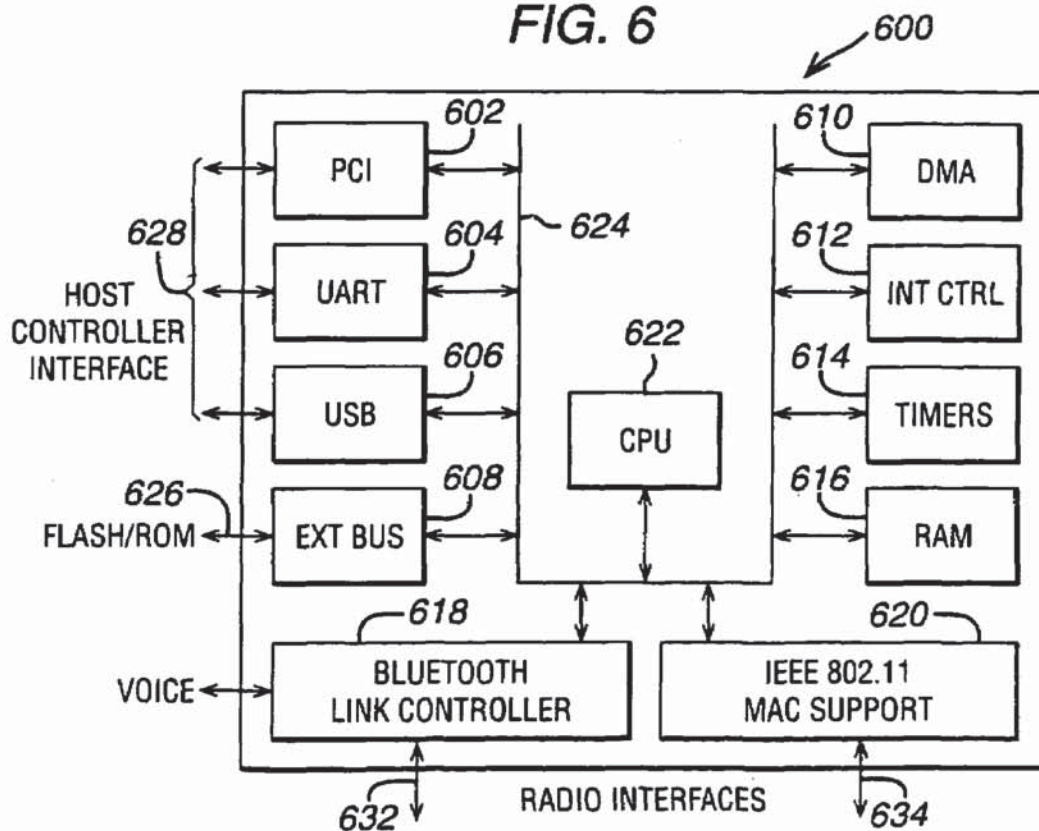

1

INTEROPERABILITY FOR BLUETOOTH/IEEE 802.11

CROSS-REFERENCE TO RELATED APPLICATION

This application claims priority of European Patent Application No. 00300397.7, which was filed on Jan. 20, 2000.

FIELD OF THE INVENTION

The present invention relates to both Bluetooth and IEEE 802.11 radio communication systems.

DESCRIPTION OF THE RELATED ART

IEEE 802.11 is a standard for wireless systems that operate in the 2.4–2.5 GHz ISM (industrial, scientific and medical) band. This ISM band is available world-wide and allows unlicensed operation for spread spectrum systems. For both the US and Europe, the 2,400–2,483.5 MHz band has been allocated, while for some other countries, such as Japan, another part of the 2.4–2.5 GHz ISM band has been assigned. The 802.11 standard focuses on the MAC (medium access control) protocol and PHY (physical layer) protocol for access point (AP) based networks and ad-hoc networks.

In access point based networks, the stations within a group or cell can communicate only directly to the access point. This access point forwards messages to the destination station within the same cell or through a wired distribution system to another access point, from which such messages arrive finally at the destination station. In ad-hoc networks, the stations operate on a peer-to-peer level and there is no access point or (wired) distribution system.

The 802.11 standard supports: DSSS (direct sequence spread spectrum) with differential encoded BPSK and QPSK; FHSS (frequency hopping spread spectrum) with GFSK (Gaussian FSK); and infrared with PPM (pulse position modulation). These three physical layer protocols (DSSS, FHSS and infrared) all provide bit rates of 2 and 1 Mbit/s. The 802.11 standard further includes extensions **11a** and **11b**. Extension **11b** is for a high rate CCK (Complementary Code Keying) physical layer protocol, providing bit rates 11 and 5.5 Mbit/s as well as the basic DSSS bit rates of 2 and 1 Mbit/s within the same 2.4–2.5 GHz ISM band. Extension **11a** is for a high bit rate OFDM (Orthogonal Frequency Division Multiplexing) physical layer protocol standard providing bit rates in the range of 6 to 54 Mbit/s in the 5 GHz band.

The 802.11 basic medium access behavior allows interoperability between compatible physical layer protocols through the use of the CSMA/CA (carrier sense multiple access with a collision avoidance) protocol and a random back-off time following a busy medium condition. In addition all directed traffic uses immediate positive acknowledgement (ACK frame), where a retransmission is scheduled by the sender if no positive acknowledgement is received. The 802.11 CSMA/CA protocol is designed to reduce the collision probability between multiple stations accessing the medium at the point in time where collisions are most likely occur. The highest probability of a collision occurs just after the medium becomes free, following a busy medium. This is because multiple stations would have been waiting for the medium to become available again. There-

2

defines: special functional behavior for fragmentation of packets; medium reservation via RTS/CTS (request-to-send/clear-to-send) polling interaction; and point co-ordination (for time-bounded services).

5 The IEEE 802.11 MAC also defines Beacon frames, sent at a regular interval by an AP to allow STAs to monitor the presence of the AP. IEEE 802.11 also defines a set of management frames including Probe Request frames which are sent by an STA, and are followed by Probe Response frames sent by the AP. Probe Request frames allow an STA to actively scan whether there is an AP operating on a certain channel frequency, and for the AP to show to the STA what parameter settings this AP is using.

Bluetooth technology allows for the replacement of the many proprietary cables that connect one device to another with one universal short-range radio link. For instance, Bluetooth radio technology built into both a cellular telephone and a laptop would replace the cumbersome cable used today to connect a laptop to a cellular telephone. Printers, personal digital assistant's (PDA's), desktops, computers, fax machines, keyboards, joysticks and virtually any other digital device can be part of the Bluetooth system. But beyond un-tethering devices by replacing the cables, Bluetooth radio technology provides a universal bridge to existing data networks, a peripheral interface, and a mechanism to form small private ad-hoc groupings of connected devices away from fixed network infrastructures.

Designed to operate in a noisy radio frequency environment, the Bluetooth radio system uses a fast acknowledgement and frequency hopping scheme to make the link robust. Bluetooth radio modules avoid interference from other signals by hopping to a new frequency after transmitting or receiving a packet. Compared with other systems operating in the same frequency band, the Bluetooth radio system typically hops faster and uses shorter packets. This makes the Bluetooth radio system more robust than other systems. Short packets and fast hopping also limit the impact of domestic and professional microwave ovens. Use of Forward Error Correction (FEC) limits the impact of random noise on long-distance links. The encoding is optimised for an uncoordinated environment. Bluetooth radios operate in the unlicensed ISM band at 2.4 GHz. A frequency hop transceiver is applied to combat interference and fading. A shaped, binary FM modulation is applied to minimise transceiver complexity. The gross data rate is 1 Mb/s.

A Time-Division Duplex scheme is used for full-duplex transmission. The Bluetooth baseband protocol is a combination of circuit and packet switching. Slots can be reserved for synchronous packets. Each packet is transmitted in a different hop frequency. A packet nominally covers a single slot, but can be extended to cover up to five slots. Bluetooth can support an asynchronous data channel, up to three simultaneous synchronous voice channels, or a channel which simultaneously supports asynchronous data and synchronous voice. Each voice channel supports 64 kb/s synchronous (voice) link. The asynchronous channel can support an asymmetric link of maximally 721 kb/s in either direction while permitting 57.6 kb/s in the return direction, or a 432.6 kb/s symmetric link.

The IEEE 802.11 standard is well-established and local area networks are already implemented based on the standard, typically in office environments. As Bluetooth comes into the market, it is likely to be implemented in a domestic environment for communications within the home, for

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.