



US006953545B1

(12) **United States Patent**
Tyler

(10) **Patent No.:** **US 6,953,545 B1**
(45) **Date of Patent:** **Oct. 11, 2005**

(54) **METHOD FOR PRODUCING CONTOURED VEHICLE FLOOR MATS HAVING INTEGRALLY FORMED NIBS**

3,555,601 A	*	1/1971	Price	18/10
4,828,898 A	*	5/1989	Bailey	428/88
5,171,619 A	*	12/1992	Reuben	428/95
5,554,333 A	*	9/1996	Fujiki	264/284
6,020,044 A	*	2/2000	Sugihara	428/85

(75) **Inventor:** **Robert D. Tyler**, Winfield, KS (US)

(73) **Assignee:** **Winfield Consumer Products, Inc.**, Winfield, KS (US)

(*) **Notice:** Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

FOREIGN PATENT DOCUMENTS

JP 01159234 A * 6/1989

* cited by examiner

Primary Examiner—Edmund H. Lee
(74) *Attorney, Agent, or Firm*—Shook Hardy & Bacon

(21) **Appl. No.:** **09/409,478**

(22) **Filed:** **Sep. 30, 1999**

(51) **Int. Cl.**⁷ **B29V 51/10**

(52) **U.S. Cl.** **264/554**; 264/177.1; 264/210.1; 264/334; 264/348

(58) **Field of Search** 264/334, 348, 264/554, 177.17, 210.1

(57) **ABSTRACT**


A method of producing contoured vehicle floor mats having integrally formed nibs. The sheet is formed by a nib forming roll in an extrusion roll stack having a plurality of indentations. The nibbed sheet is placed onto the thermoform mold with the nibs directed away from the mold. The sheet is heated to a plastic state and stretched over the mold to form a contoured mat shaped to vehicle within a vehicle compartment, trunk or cargo area. The nibs on the underside of the mat contacts the floor covering and prevents the mats from sliding on the interior surface of the vehicle.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,623,242 A	*	12/1952	Grover	425/339
2,915,427 A	*	12/1959	Schriner et al.	154/110

18 Claims, 2 Drawing Sheets

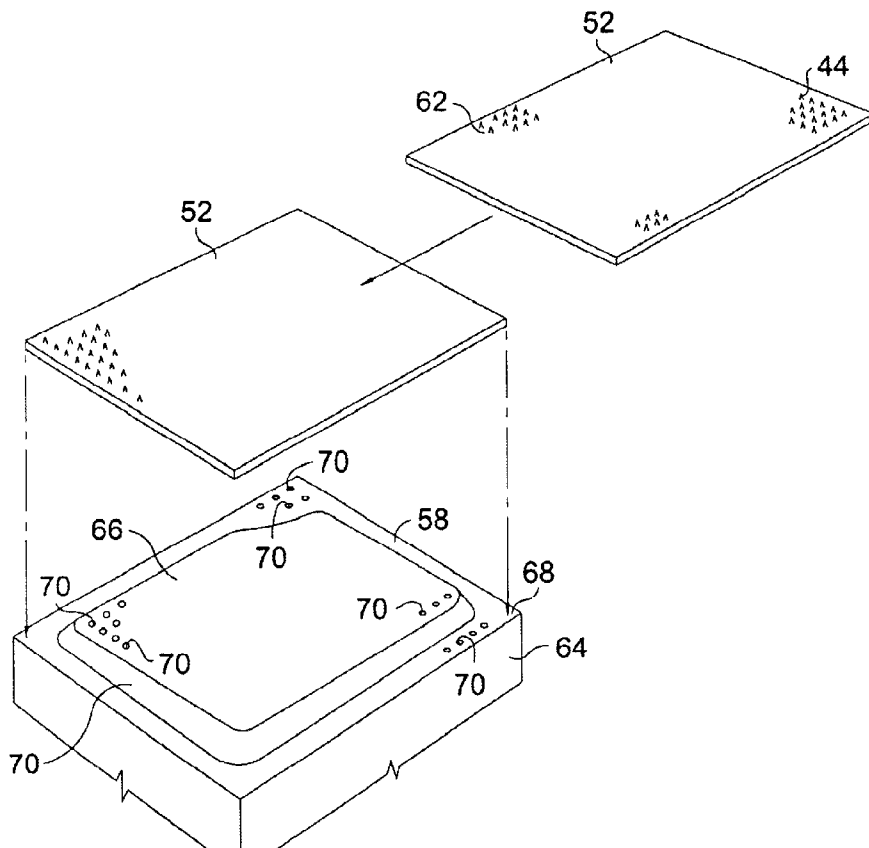

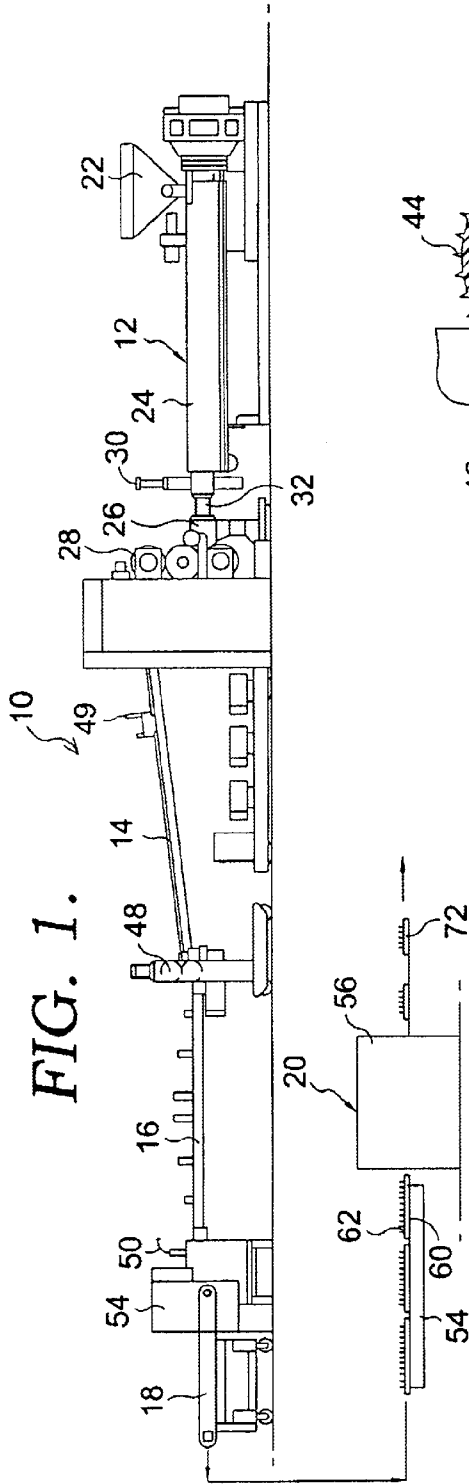


FIG. 1.

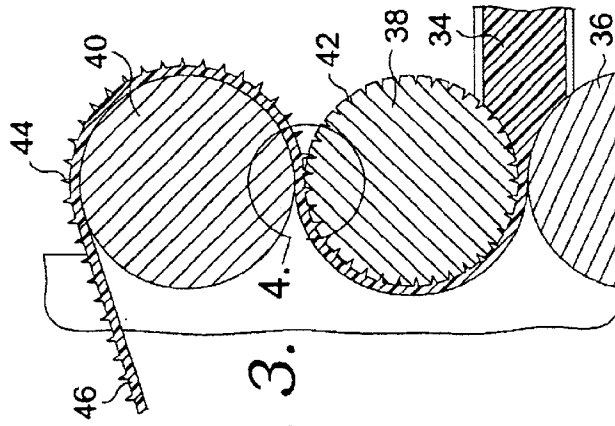


FIG. 3.

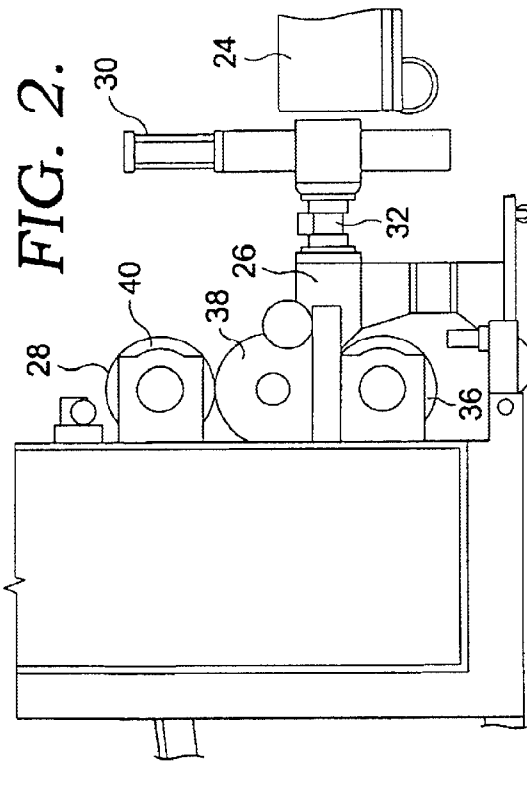


FIG. 2.

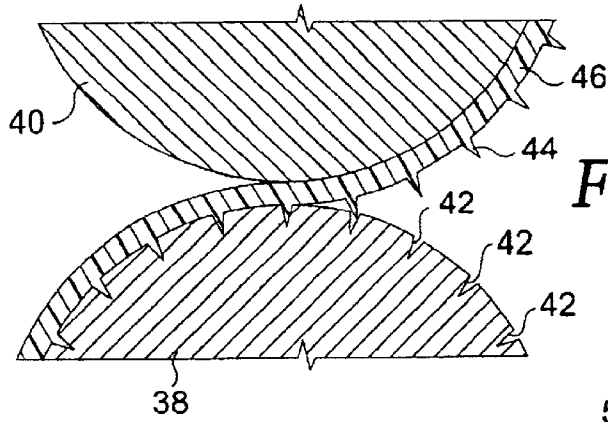


FIG. 4.

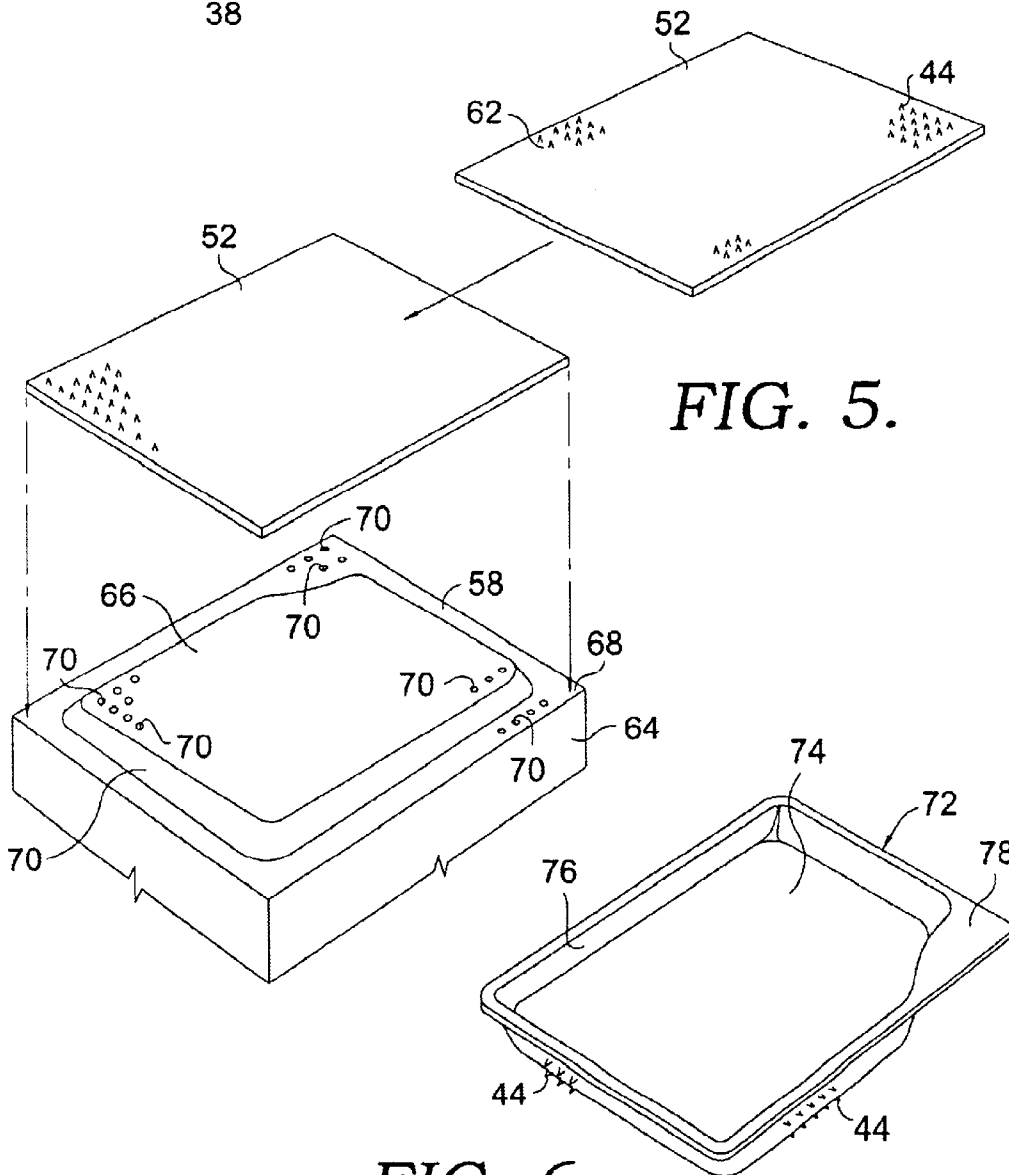


FIG. 5.

FIG. 6.

1

**METHOD FOR PRODUCING CONTOURED
VEHICLE FLOOR MATS HAVING
INTEGRALLY FORMED NIBS**

**CROSS-REFERENCE TO RELATED
APPLICATIONS**

Not Applicable.

**STATEMENT REGARDING FEDERALLY
SPONSORED RESEARCH OR DEVELOPMENT**

Not Applicable.

BACKGROUND OF THE INVENTION

This invention relates generally to a method for manufacturing plastic floor mats for vehicles. More specifically, the invention relates to a method for manufacturing plastic floor mats molded to correspond with the three dimensional profile of the interior of a vehicle floor and having a plurality of integrally molded nibs on the surface of the mats to contact the vehicle's floor covering.

Mats are often placed over the floor board of a vehicle to protect the floor covering. Particularly, mats are useful to prevent the carpet or other floor covering from becoming worn, stained or otherwise damaged by the occupants of the vehicle or items stored within the vehicle.

Protective vehicle mats come in a variety of shapes and sizes. One typical prior art mat is a mat constructed from a flat sheet made of fabric, rubber or plastic material. The mats are typically flexible and are laid across the floor board surface of the vehicle. One drawback of these type of mats is that they tend to slide across the floor board due to the forces applied by the passengers of the vehicle or by the motion of the vehicle itself. One prior art solution to this problem is to apply protrusions such as nibs to the surface of the mats contacting the floor board. Typically, the nibs are formed as small spikes with pointed ends that grip the floor board surface of the vehicle. The nibs are generally equally distributed across the underlying surface to provide a number of individual contact areas. The main drawback of these flat mats is that they do not effectively cover the contoured surfaces of the floor board. Specifically, the flat mats are not effective for protecting the corners of the vehicle floor board or those areas having more complex surface shapes. Further, even those flat floor mats having nibbed surfaces tend to move along the floor board since the nibs are not in contact with the large, contoured area of the floor board and do not benefit from the lateral support afforded contoured mats.

Some prior art mats are produced to closely correspond to the shape of a vehicle floorboard and overcome the problems inherent with flat sheets. The complementary shape of the contoured mat mates with the vehicle floorboard to hold the mat into place. However, the prior art processes for producing these contoured mats have a number of shortcomings. One prior art process is the use of thermoforming to produce a multi-dimensional, contoured mat. In this process, a polymer sheet is placed over a solid molding from defining the shape of the mat. The sheet is softened by heating in an oven and is held to the form by either vacuum or air pressure forcing the sheet against a female or male tool. However, while this prior art method has been effective for forming appropriately shaped mats at a relatively low cost, the prior art thermoforming processes do not disclose a method for forming integral nibs on the mat. In some cases, manufac-

2

operation. Typically, the plate is secured to the mat by a mechanical means or by one of a variety of adhesives. Besides requiring an additional step, the mats formed in this manner typically only have nibs on the lower, flat portion of the mat surface. The contoured portion of the mats, such as the upwardly extending sidewalls of typical floorboards are left smooth and do not grip the floor covering of the vehicle. Also, in some situations, the fixed plate may either become loose or partially separated from the contoured mat.

Some prior art processes have produced integrally formed nibs on the underside of a contoured mat. One example of such a process is injection molding. In this method, molten material is injected into the cavity and cooled to form the final part. In another process, used primarily with rubber mats, the mat is compression molded within a closed mold placed under pressure. However, these processes are particularly, if not prohibitably, costly. Accordingly, a process is needed that allows nibs to be integrally formed within a multi-dimensional, contoured mat without the costs associated with these expensive prior art techniques.

BRIEF SUMMARY OF THE INVENTION

It is an object of the present invention to provide a method for producing contoured vehicle mats having integrally formed nibs that is significantly less costly than prior art methods.

A further object of the present invention is to provide a method for manufacturing plastic vehicle floor mats having integrally formed nibs using a thermoforming process.

Another object of the invention is to provide a process for forming contoured floor mats having integrally formed nibs by using an extrusion process to form the nibs and a thermoforming process to provide the contour to the mats.

According to the present invention, the foregoing and other objects are achieved by extruding a thermoplastic material through a roll stack having a roll having a plurality of indentions for forming nibs. The heated material is pressed onto the surface of the central roller by an adjacent roller so that material fills the indentions to form nibs on one side of the sheet. As the sheet is pulled from the central roller, the integrally formed nibs are released from the indentions. Next, the sheets are cooled and cut into blanks for forming the mats. The blanks are placed within a thermoforming station with the nibbed side of the blank directed away from the surface of the molding tool. The blank is heated to a plastic state and drawn toward the contoured tool by vacuum pressure. Thereafter, the blank is stretched over the tool to form the contoured shape desired for the particular vehicle. Thus, a contoured, plastic vehicle mat having integrally formed nibs on the underside of the mat is produced using the thermoforming process.

Additional objects, advantages and novel features of the invention will be set forth in part in the description which follows, and in part will become apparent to those skilled in the art upon examination of the following, or may be learned from practice of the invention. The objects and advantages of the invention may be realized and obtained by means of the instrumentalities and combinations particularly pointed out in the appended claims.

**BRIEF DESCRIPTION OF THE SEVERAL
VIEWS OF THE DRAWINGS**

A preferred embodiment of the present invention will be

3

FIG. 1 is an elevational schematic view of the vehicle mat production line according to the present invention;

FIG. 2 is an enlarged, partial side elevational view of the extruder of the present invention;

FIG. 3 is an enlarged, fragmentary side elevation view of the extruding rollers of the present invention;

FIG. 4 is an enlarged view of the extrusion rollers within the captured region 4 of FIG. 3;

FIG. 5 is a perspective view of the thermoforming molding tool of the present invention; and

FIG. 6 is a perspective view of a vehicle floor mat made in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Referring to FIG. 1, a vehicle mat production line generally designated by the numeral 10 is shown. Specifically, the production line is directed to a method for manufacturing plastic vehicle mats having a contoured, multi-dimensional shape. Nibs or similar structures are integrally formed on the underside of the mats to prevent the mats from slipping on the surface of the vehicle covered by the mats. The mats may be placed in the driver floorboard, the passenger floorboard, or the backseat floorboard. Furthermore, the mats may serve as cargo liners and be formed to fit the trunk of an automobile or the storage area of a van, truck, or sport utility vehicle.

The vehicle mat production line 10 includes an extruder 12, a first conveyor 14, a second conveyor 16, a run-out table 18 and a thermoforming station 20. Generally, the nibs are integrally formed in the mat material at the extruder 16 and the form fitting contour is molded at the thermoforming station 20.

With additional reference to FIG. 2, the extruder 12 includes a feed hopper 22, an extrusion barrel 24, a die 26 and a roll stack 28. Generally, feed material in the form of pellets or granules is placed within feed hopper 22. The feed material is a combination of a linear low density polyethylene material and one of a group of thermoplastic elastomeric (T.P.E. or T.P.O.) materials. The linear low density polyethylene material enhances melt strength in thermoforming process and increase wearability (or durability) of the floor liner. A linear low density polyethylene material sold by Phillips Petroleum under the name K203 is used. The thermoplastic material is one of a group of thermoplastic elastomers. Most preferably, the thermoplastic elastomers is either a blend of polypropylene and EPDM rubber or a blend of polypropylene, EPDM rubber and EVA. For example, two particular blends of polypropylene and EPDM rubber are sold by the Advanced Elastomers Systems, Akron, Ohio, under the names VYRAM and SANTOPRENE. An example of an effective blend of polypropylene, EPDM rubber and EVA is sold by the same company under the name VISTAFLEX. In the most preferred embodiment, the feed material is a blend constituting 60% of the K203 low density polyethylene and 40% of the VYRAM thermoplastic elastomer. The examples of thermoplastic elastomers are representative, and various other thermoplastic elastomers having similar melt strength and other physical characteristics may be advantageously used in the part forming process. Similar, blends having various ratios of low density polyethylene and thermoplastic elastomer material may be used without departing from the scope of the invention.

4

(not shown) heats the material until the plastic reaches a homogenous fluid state. With the preferred material blend discussed above, the extrusion occurs at a temperature between 395–420 degrees Fahrenheit and at a pressure between 1800–2400 psi. With additional reference to FIG. 2, the screw forces the material through a screen pack 30 located at the end of the barrel. The screen pack 30 filters the plastic material and supplies back pressure to the material remaining in the extrusion barrel 24. Next, the plastic material is forced through a valve die adaptor 32 and finally through an orifice (not shown) in die 26. The shape of orifice of the die 26 defines the cross sectional profile of the material exiting the barrel 18. Heretofore, the extrusion process discussed above is conventional in the art of plastic extrusion processes.

With reference to FIG. 3, once the extruded material 34 exits the die 26, it enters the roll stack 28 of the present invention. The roll stack 28 is comprised of lower roll 36, a central nib-forming roll 38 and an upper roll 40. The lower roll is generally smooth (or is minimally textured) and rotates in a first rotated direction. As shown in FIG. 4, the nib-forming roll 38 has a plurality of indentions 42. Each indentation 42 has a tapered sidewall that define a small cavity. The sidewalls meet to form a rounded or sharply pointed end at the bottom of the indentions. The indentions 42 are preferably spaced equally from one another to create an equal dispersion pattern of nibs in the sheet. However, the indentions may be formed in any of a variety of geometric configurations. For instance, in some embodiments, it may be desirable to have a higher concentration of nibs along the periphery of the sheet to enhance gripping at the more contoured surfaces of the vehicle surface.

To form the nibs, the extruded material 34 is pressed between the lower roll 36 and nib forming roll 38. The material 34 is pushed into the form of a mat sheet 46 due to the pressure between the rolls 36 and nib forming roll 38 which rotates in a second direction opposite from lower roll 36. As the mat sheet 46 is formed, some of the thermoplastic material is forced into and fills the indentions 42 of nib forming roll 38. With still further reference to FIG. 4, as the mat sheet 46 rolls around nibbed roller 38, the nibs 44 remain in the indentions 42 until the upper roll 40 pulls the mat sheet 46 from the nib forming roll. As the mat sheet 46 is spooled onto upper roll 40, rotating in the direction opposite from nibbed roll 38, the nibs 44 are released from the indentions in the nib forming roll 38.

Next, the mat sheet 46 is directed along the inclined first conveyor 14. The conveyor is driven by a conventional pull roll 48. At this stage in the production line 10, the mat sheet is sheared along its edges by a shear cutter 49 to define a mat sheet of constant width. Moreover, the sheet 46 cools as it proceeds down the first conveyor 14. Next, the mat sheet 46 travels along the second conveyor 16. At the end of the generally horizontal second conveyor 16, the sheet 46 is forced downwardly by a pneumatic hold down 50. The mat sheet 46 is sheared into mat blanks 52 at the shear table 54. At this point, the mat blanks 52 are removed from the run out table 18 of the first stage of the production line 10. As shown in FIG. 5, the mat blanks 52 may be sized to produce a single mat or may be of an appropriate size to be simultaneously molded into a number of mats.

With reference now FIGS. 1 and 5, the thermoforming component of the vehicle mat production line 10 is shown. The thermoforming station 20 generally includes a loading station 55, an oven 56 and a mold 58 located within the oven

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.