



US006504834B1

(12) **United States Patent**  
**Fifield**

(10) **Patent No.:** **US 6,504,834 B1**  
(45) **Date of Patent:** **Jan. 7, 2003**

- (54) **WIRELESS NETWORK**
- (75) Inventor: **Robert Fifield**, Redhill (GB)
- (73) Assignee: **Koninklijke Philips Electronics N.V.**, Eindhoven (NL)
- (\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

|           |    |   |         |                     |         |
|-----------|----|---|---------|---------------------|---------|
| 5,594,738 | A  | * | 1/1997  | Crisler et al.      | 370/347 |
| 5,638,371 | A  | * | 6/1997  | Raychaudhuri et al. | 370/347 |
| 5,640,395 | A  | * | 6/1997  | Hamalainen et al.   | 370/322 |
| 5,644,576 | A  | * | 7/1997  | Bauchot et al.      | 370/437 |
| 5,729,534 | A  | * | 3/1998  | Jokinen et al.      | 370/280 |
| 5,752,193 | A  | * | 5/1998  | Scholefield et al.  | 455/452 |
| 5,818,830 | A  | * | 10/1998 | Daane et al.        | 370/347 |
| 5,905,720 | A  | * | 5/1999  | Lin                 | 370/337 |
| 5,970,062 | A  | * | 10/1999 | Bauchot             | 370/345 |
| 6,055,242 | A  | * | 4/2000  | Doshi et al.        | 370/458 |
| 6,097,707 | A  | * | 8/2000  | Hodziec et al.      | 370/321 |
| 6,178,512 | B1 | * | 1/2001  | Fifield             | 713/201 |
| 6,243,372 | B1 | * | 6/2001  | Petch et al.        | 370/350 |
| 6,295,285 | B1 | * | 9/2001  | Whitehead           | 370/329 |

- (21) Appl. No.: **09/102,838**
- (22) Filed: **Jun. 23, 1998**

- (30) **Foreign Application Priority Data**  
Aug. 7, 1997 (GB) ..... 9716626
- (51) **Int. Cl.**<sup>7</sup> ..... **H04Q 7/00**; H04J 3/00; H04B 7/212
- (52) **U.S. Cl.** ..... **370/345**; 370/329; 370/327; 370/437; 435/426; 435/447
- (58) **Field of Search** ..... 370/314, 337, 370/345, 346, 347, 350, 508, 445, 449, 468, 458, 474, 321, 329, 280; 455/426, 447, 66; 713/150, 160, 213; 320/337

**FOREIGN PATENT DOCUMENTS**


GB 2069799 B 8/1981 ..... H04J/3/16  
\* cited by examiner

*Primary Examiner*—Wellington Chin  
*Assistant Examiner*—M. Phan  
(74) *Attorney, Agent, or Firm*—Daniel J. Piotrowski

- (56) **References Cited**  
**U.S. PATENT DOCUMENTS**  
5,239,673 A \* 8/1993 Natarajan ..... 455/426  
5,274,841 A \* 12/1993 Natarajan et al. .... 455/334  
5,276,703 A \* 1/1994 Budin et al. .... 375/130  
5,384,777 A \* 1/1995 Ahmadi et al. .... 370/337  
5,559,804 A \* 9/1996 Amada et al. .... 370/347

(57) **ABSTRACT**  
A method of operating a wireless network comprising a plurality of wireless terminals and optionally a base station uses a transmission frame (300) including an association section (310) for use by wireless terminals wishing to join the network. A variable number of association sections (310) is scheduled in response to operating characteristics such as the load on the network or the presence of a high security application on the network.

**10 Claims, 2 Drawing Sheets**

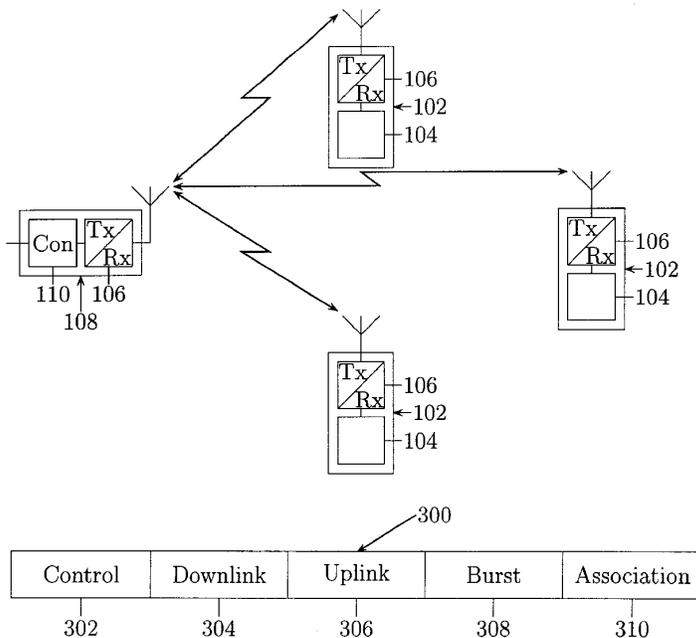

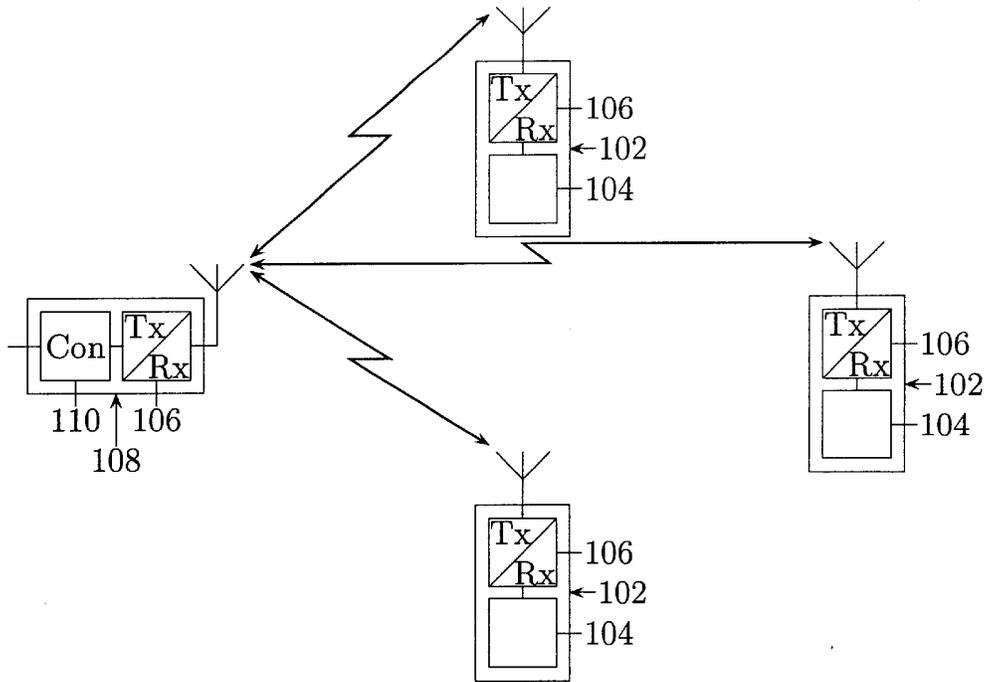


FIG. 1

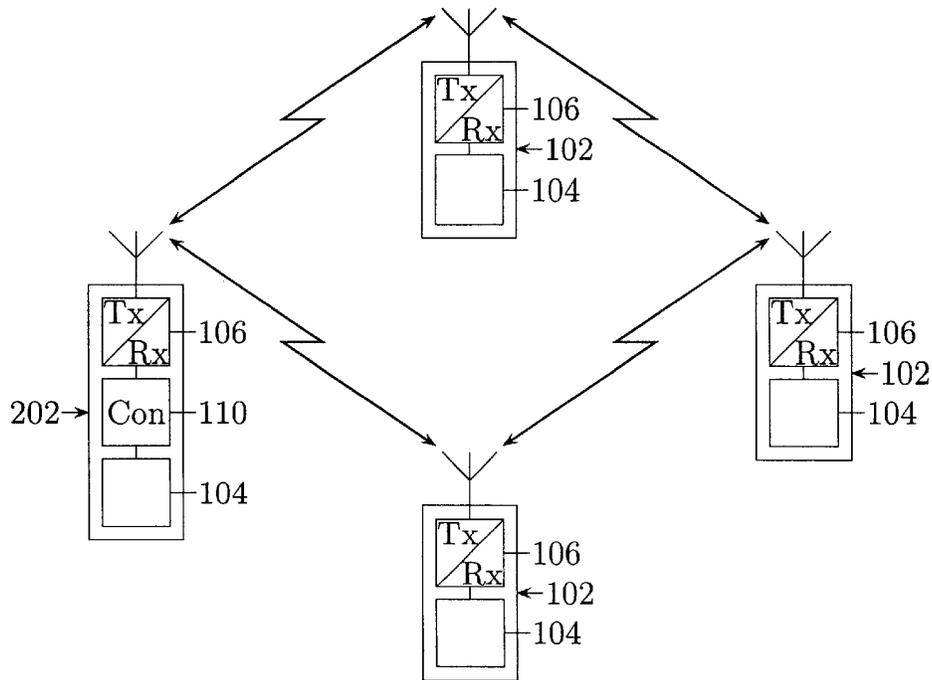


FIG. 2

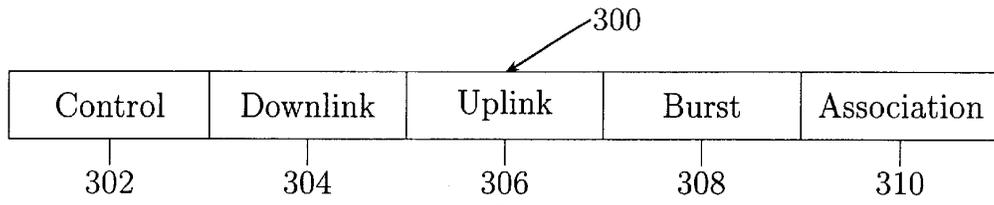


FIG. 3

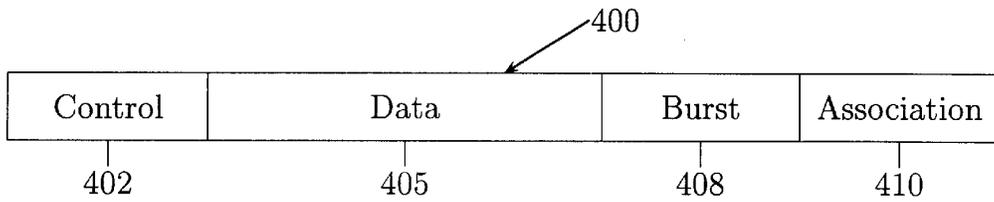


FIG. 4

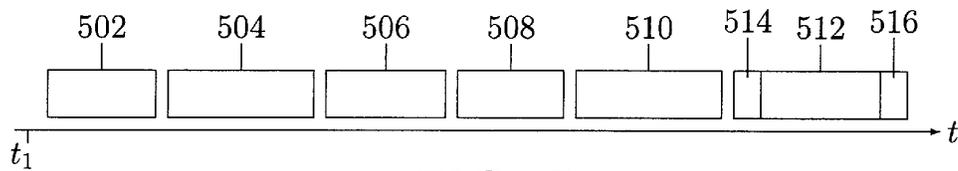


FIG. 5

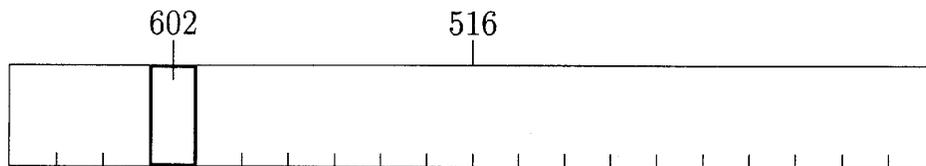


FIG. 6

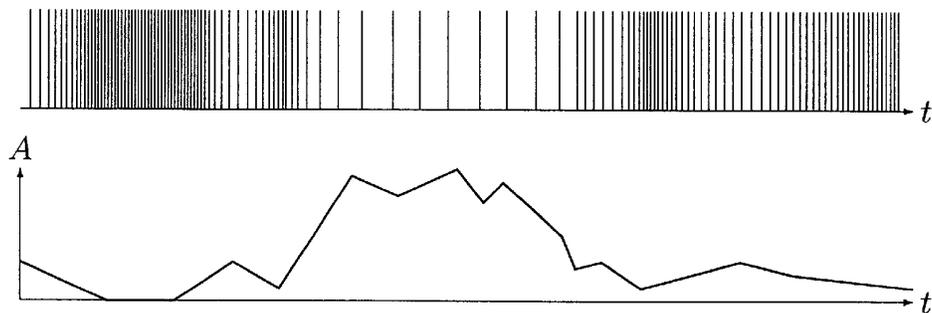


FIG. 7

## WIRELESS NETWORK

## BACKGROUND OF THE INVENTION

The present invention relates to wireless networks for communication between a number of wireless terminals which are free to join and leave the network at any time. The network may be configured so that all the wireless terminals communicate through a base station, or so that the devices communicate directly with one another.

Wireless networks are intended to offer flexible and cost-effective alternatives to wired networks, for example as Local Area Networks (LANs). An advantage of wireless over fixed networks is the ease with which new networks can be created and with which new devices, known as wireless terminals, can be added to the network. Some wireless network standards exist, for example IEEE 802.11 in the USA and HIPERLAN in Europe, whilst others are under development, for example Wireless Asynchronous Transfer Mode (WATM). Such standards define the format of a transmission frame, within which control and data transfer functions can take place. The format and length of transmission frames may be fixed or dynamically variable.

Known wireless networks, for instance as disclosed in U.S. Pat. No. 5,274,841, typically operate in one of two different configurations:

1 A base station orientated configuration in which wireless terminals can only communicate with each other with the support of a base station, which is responsible for all wireless terminals within a certain radio coverage area. The base station itself may be connected to further wired networks for communications beyond the radio coverage area. The base station may be a separate unit, or it may be a wireless terminal with additional functionality.

2 A peer to peer configuration in which wireless terminals communicate directly with one another. One of the wireless terminals is typically chosen dynamically to perform the control function.

The first configuration is generally considered to be most suitable for networks with a relatively fixed structure, while the second is considered most suitable for the generation of dynamic networks, such as for document exchange at a meeting.

In order for a wireless network to realise the advantage of flexibility, the procedure for wireless terminals joining and leaving the network should be as simple as possible. The act of a wireless terminal joining a network is known as association and needs to be scheduled within the data transmission format defined for the wireless network. Examples of known techniques for association include dynamic framelength slotted ALOHA, described in GB-B-2 069 799, carrier sense multiple access and address based tree resolution algorithms.

## OBJECTS AND SUMMARY OF THE INVENTION

An object of the present invention is to improve the flexibility and efficiency of association to a wireless network.

According to a first aspect of the present invention there is provided a method of operating a wireless network, wherein transmission of data takes place in transmission frames of variable length subdivided into a plurality of time slots, the wireless network comprising a controller and a variable number of wireless terminals, the method compris-

ing the controller maintaining a list of wireless terminals currently registered with the network, determining the lengths of successive transmission frames, and allocating time slots within said frame for various purposes, characterised by the controller scheduling a variable number  $n$  of association sections in each transmission frame, where  $n$  has a minimum value of zero, in response to the current operating characteristics of the network, by which association sections the wireless terminals can register with the controller.

If desired, the association sections may use a contention based protocol.

According to a second aspect of the present invention there is provided a controller for a wireless network having a plurality of wireless terminals, the controller comprising means for maintaining a list of wireless terminals currently registered with the network, means for monitoring the operating characteristics of the network, means for determining the lengths of successive transmission frames and means for allocating time slots within each of said frames, characterised by means responsive to the current operating characteristics of the network for scheduling a variable number  $n$  of association sections in each transmission frame, where  $n$  has a minimum value of zero.

According to a third aspect of the present invention there is provided a wireless terminal for use in a wireless network constituted by at least one wireless terminal and a controller, the wireless terminal comprising transceiver means for obtaining scheduling information relating to transmission frames in the network, characterised by means for determining whether an association section is available in a transmission frame and in that in response to said means the wireless terminal attempts association during the association section.

The present invention is based upon the recognition, not present in the prior art, that adding an explicit association section to a transmission frame format and enabling this association section to be scheduled more or less frequently depending on system load improves the efficiency and flexibility of operation of a wireless network.

By means of the present invention a wireless network can schedule a variable number of association sections dependent on considerations such as network loading and the number of active wireless terminals.

## BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

FIG. 1 is a block schematic diagram of a wireless network made in accordance with the present invention, having a base station orientated configuration;

FIG. 2 is a block schematic diagram of a wireless network made in accordance with the present invention, having a peer to peer configuration;

FIG. 3 is a diagram of an example of a possible transmission frame format suitable for use in a wireless network configured with a base station of the type shown in FIG. 1;

FIG. 4 is a diagram of an example of a possible transmission frame format suitable for use in a peer to peer configured wireless network of the type shown in FIG. 2;

FIG. 5 shows in outline the process of a wireless terminal associating with the network;

FIG. 6 is a diagram showing an expanded view of the association section in a transmission frame; and

3

FIG. 7 in the lower half is a graph showing an example of the variation of network load with time (t) and in the upper half showing the corresponding scheduling of association sections.

In the drawings the same reference numerals have been used to indicate corresponding features.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

The base station orientated wireless network shown in FIG. 1 comprises a number of wireless terminals 102 and a base station 108, which base station is optionally connected to a fixed telecommunications network, for example the PSTN. The wireless terminals 102 comprise transceivers 106 which communicate with one another via the base station 108 which comprises a transceiver 106 and a controller 110. The controller 110 may be at the same location as the transceiver 106 or remote from it and connected by land line connection means. A variety of devices may be configured to act as wireless terminals 102, for example portable computers, printers and measurement equipment. In addition to the transceiver 106 each wireless terminal also comprises an application-specific block 104 which implements the required functionality.

The peer to peer wireless network shown in FIG. 2 comprises a number of wireless terminals 102 and an enhanced wireless terminal 202, which comprises a transceiver 106 and application-specific block 104, as for a standard wireless terminal, and further comprises a controller 110 to enable it to perform the control function in a wireless network if required. The wireless terminals 102 and enhanced wireless terminals 202 communicate directly with one another rather than via a base station. If there is only one enhanced wireless terminal 202 it performs the control function for the network, otherwise, one of the enhanced wireless terminals 202 is chosen dynamically to perform the control function.

The format of the transmission frame 300 shown in FIG. 3 is for a base station orientated configuration of the type shown in FIG. 1. This particular format is intended for use with WATM and similar standards aimed at wireless local area networks. The format is a time division format comprising successive transmission frames 300, where each transmission frame 300 is divided into a number of sections, each of which contains a number of slots in which data is transmitted. The lengths of the complete frames and the sections within them can be varied in response to changing requirements for data transmission to and from the wireless terminals 102.

A control section 302 is used by the base station 108 to signal the allocation of slots to wireless terminals 102 in the sections comprising the remainder of the frame 300. The allocation takes into consideration the number of slots requested by the wireless terminals 102, the available bandwidth, restrictions on the length of transmission frames and any other relevant criteria.

A downlink section 304 is used for transfer of data from the base station 108 to wireless terminals 102, the transfer of data to a particular wireless terminal 102 taking place in the slots allocated for it during the control section 302. An uplink section 306 is used for transfer of data in the reverse direction, from wireless terminals 102 to the base station 108. Again, the transfer of data from a particular wireless terminal 102 takes place in the slots allocated for it during the control section 302.

An energy burst section 308 is provided for use by wireless terminals 102 that have associated with the network

4

but are inactive. Each of these terminals is assigned a unique slot within the energy burst section 308 in which it may transmit to indicate that it requires an uplink slot to transmit data. The base station 108 will then take this request into account when scheduling the slots in the uplink section 306 of the next transmission frame 300.

An association section 310 is provided for use by wireless terminals 102 that wish to join the network. The detailed working of this section is described below. The association section may not always be present, as it is scheduled under control of the base station 108. The base station 108 may modify the scheduling of the association section 310 to:

Schedule an association section 310 when it is convenient. This minimises the risk of losing transmission packets due to peaks in transmission traffic. Under conditions of high network traffic the base station 108 may not schedule an association section 310 in a transmission frame. In order to avoid completely shutting out new wireless terminals 102 the base station 108 may be controlled so that there is a maximum time delay between one association section and the next.

Schedule association sections 310 more frequently during conditions of low network traffic. This allows faster association for waiting wireless terminals 102.

Schedule multiple association sections 310. This may be desirable when many wireless terminals 102 wish to associate, for example if no association sections 310 have been scheduled for some time.

Schedule no association sections 310, which may be desirable in some special circumstances. One example when the network has no spare capacity, another example is when a high security application is running and wishes to prevent any further wireless terminals 102 joining the network.

It should be noted that the order of sections within the transmission frame illustrated in FIG. 3 may be varied, in particular it may be beneficial to schedule the energy burst section 308 and the association section 310 near the start of the frame to reduce transmission time delays.

The format of the transmission frame 400 shown in FIG. 4 is for a peer to peer configuration of the type shown in FIG. 2, although much of the format is the same as for the base station orientated frame format shown in FIG. 3. A control section 402 is used by the enhanced wireless terminal 202 acting as base station to allocate slots to wireless terminals 102 in the remainder of the frame. There are no separate downlink and uplink sections instead there is a data transfer section 405, where transfer of data from one wireless terminal 102 to another occurs in the slots allocated to it, the reservation of which was detailed during the control section 402.

The energy burst section 408 and association section 410 work in a similar manner to a base station orientated configuration.

Consider now in more detail the sequence of events occurring when a wireless terminal wishes to associate with a network, taking a base station orientated configuration as the example. FIG. 5 shows a sequence of transmission frames 502, 504, 506, 508, 510 and 512 transmitted over time t. Each frame has a format identical to or based on that shown in FIG. 3, although the total length of the transmission frame 300 and the sections within it may vary. At time  $t_1$  a wireless terminal 102, identified subsequently as WTA, is switched on and wishes to associate with the network. The control section 302 of frame 502 indicates that no association section 310 is scheduled in this frame. The control

# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

## LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

## FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.