

AUTOMOTIVE HANDBOOK



BOSCH

4th
EDITION

Imprint

Published by:

© Robert Bosch GmbH, 1996
Postfach 30 02 20
D-70442 Stuttgart
Automotive Equipment Business Sector,
Department for Technical Information
(KH/VDT).
Management: Dipl.-Ing.(FH) Ulrich Adler.

Editor in chief:

Dipl.-Ing.(FH) Horst Bauer.

Editors:

Ing.(grad.) Arne Cypra,
Dipl.-Ing. (FH) Anton Beer,
Dipl.-Ing. Hans Bauer.

Production management:

Joachim Kaiser.

Layout:

Dipl.-Ing.(FH) Ulrich Adler,
Joachim Kaiser.

Translation:

Editor in chief:
Peter Girling
Translated by:
Ingenieurbüro für Technische und
Wissenschaftliche Übersetzungen
Dr. W.-D. Haehl GmbH, Stuttgart
Member of the ALPNET Services Group
William D. Lyon

Technical graphics:

Bauer & Partner GmbH, Stuttgart.
Design, front cover, front matter:
Zweckwerbung, Kirchheim u.T., Germany
Technische Publikation, Waiblingen

Distribution, 4th Edition:

SAE Society of Automotive Engineers
400 Commonwealth Drive
Warrendale, PA 15096-0001 U.S.A.
ISBN 1-56091-918-3

Printed in Germany.
Imprimé en Allemagne.

4th Edition, October 1996.

Reproduction, duplication and translation of this publication, including excerpts therefrom, is only to ensue with our previous written consent and with particulars of source. Illustrations, descriptions, schematic diagrams and other data serve only for explanatory purposes and for presentation of the text. They cannot be used as the basis for design, installation, and scope of delivery. We undertake no liability for conformity of the contents with national or local regulations. We reserve the right to make changes.

The brand names given in the contents serve only as examples and do not represent the classification or preference for a particular manufacturer. Trade marks are not identified as such.

The following companies kindly placed picture matter, diagrams and other informative material at our disposal:

Audi AG, Ingolstadt;
Bayerische Motoren Werke AG, Munich;
Behr GmbH & Co, Stuttgart;
Brose Fahrzeugteile GmbH & Co. KG, Coburg;
Continental AG, Hannover;
Eberspächer KG, Eßlingen;
Filterwerk Mann und Hummel, Ludwigsburg;
Ford-Werke AG, Cologne;
Aktiengesellschaft Kühnle, Kopp und Kausch, Frankenthal;
Mannesmann Kienzle GmbH, Villingen-Schwenningen;
Mercedes-Benz AG, Stuttgart;
Pierburg GmbH, Neuss;
RWE Energie AG, Essen;
Volkswagen AG, Wolfsburg;
Zahnradfabrik Friedrichshafen AG, Friedrichshafen.

Source of information for motor-vehicle specifications: Automobil Revue Katalog 1995.

The **rotary-piston supercharger** incorporates a rotary piston moving about an internal axis. The driven inner rotor (rotary piston) turns through an eccentric pattern in the cylindrical outer rotor. The rotor ratios for rotary-piston superchargers are either 2:3 or 3:4. The rotors turn around fixed axes without contacting each other or the housing. The eccentric motion makes it possible for the unit to ingest the maximum possible volume (chamber I) for compression and discharge (chamber III). The internal compression is determined by the position of the outlet edge A.

A ring and pinion gear with sealed grease lubrication synchronizes the motion of the inner and outer rotors. Permanent lubrication is also employed for the roller bearings. Inner and outer rotors employ gap seals, and usually have some form of coating. Piston rings provide the seal between working chamber and gear case.

Superchargers on IC engines are usually belt-driven (toothed or V-belt). The coupling is either direct (continuous engagement) or via clutch (e.g., solenoid-operated clutch, demand actuation). The step-up ratio may be constant, or it may vary according to engine speed.

Mechanical positive-displacement superchargers (MVL) must be substantially larger than their centrifugal counterparts (MKL) in order to produce a given mass flow. The mechanical positive-displacement supercharger is generally applied to small and medium-displacement engines,

where the ratio between charge volume and space requirements is acceptable.

Exhaust-gas turbochargers


The exhaust-gas turbocharger consists of two turbo elements, a turbine and a compressor, which are installed on a single shaft. The turbine uses the energy of the exhaust-gas to drive the compressor. The compressor, in turn, draws in fresh air which it supplies to the cylinders in compressed form. The air and the mass flow of the exhaust gases represent the only coupling between the engine and the compressor. Turbocharger speed does not depend upon engine speed, but is rather a function of the balance of drive energy between the turbine and the compressor.

Exhaust-gas turbochargers are used on engines in passenger cars, trucks and heavy-duty engines (marine and locomotive power plants, stationary generators).

The typical engine-performance curves for this type of application are illustrated in a compression graph (p. 427), valid for all displacements, in which the surge line separates the stable operating range on its right from the instable range on its left. It is obvious that the instable range presents no difficulties provided that the correct turbocharger is selected, as all of the points representing potential operating conditions lie either on the engine operating curves (full load) or below them (part-load operation).


Cross section of a rotary-piston supercharger

- 1 Housing
- 2 Outer rotor
- 3 Inner rotor
- 4 Outlet edge A
- 5 Chamber III
- 6 Chamber II
- 7 Chamber I




Boost-pressure regulation via exhaust-side boost-pressure control valve (wastegate)

- 1 Engine
- 2 Exhaust-gas turbocharger
- 3 Wastegate

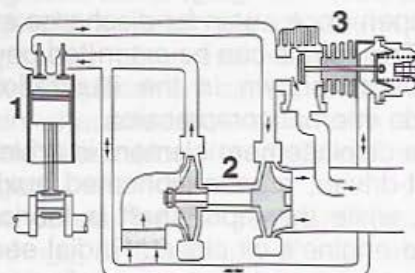

Variable turbine geometry (schematic diagram)

1 Turbine housing, 2 Adjusting ring, 3 Control cams, 4 Adjustable guide blades, 5 Guide blades with adjusting lever, 6 Air intake.


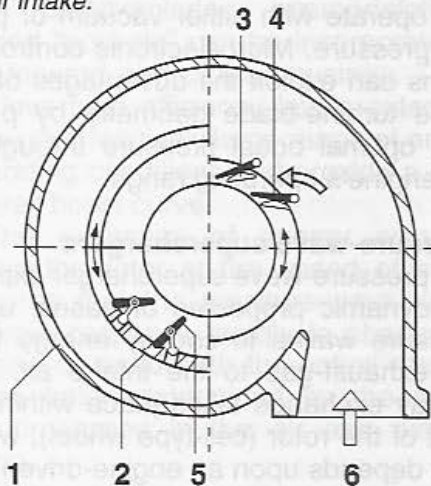


Different applications require various configurations. However, all exhaust-gas turbochargers have practically the same major components: the turbocharger rotor and shaft assembly, which combine with the bearing housing to form the so-called core assembly, and the compressor housing. Other components such as turbine housing and control elements vary according to the specific application.

Piston rings are installed on both the exhaust and intake sides to seal off the bearing housing's oil chamber. In some special applications sealing is enhanced by trapped air or a compressor-side carbon axial face seal. Friction bearings are generally used, installed radially as either floating double plain bushings or stationary plain-bearing bushings, while multiple-wedge surface bushings provide axial support. The turbocharger is connected to the engine's lube-oil circuit for lubrication, with oil supply and return lines located between the compressor and turbine housings. No additional cooling arrangements are provided for the bearing housing on standard units. The temperatures can be maintained below critical levels using devices such as a heat shield, and by thermally isolating the bearing housing from the hot turbine housing, supplemented by incorporating suitable design

Truck exhaust-gas turbocharger with twin-flow turbine housing

1 Compressor housing, 2 Compressor wheel, 3 Turbine housing, 4 Rotor, 5 Bearing housing, 6 Incoming exhaust-gas, 7 Exhaust-gas discharge, 8 Atmospheric air, 9 Compressed fresh air, 10 Oil supply, 11 Oil return.

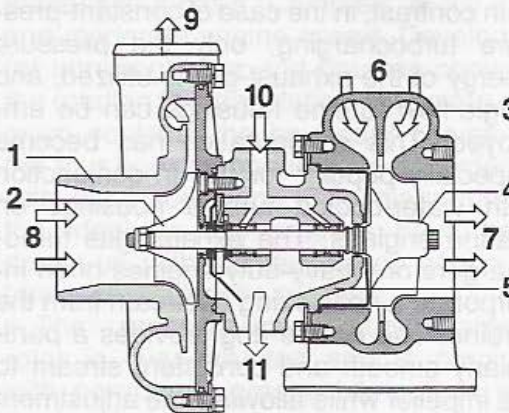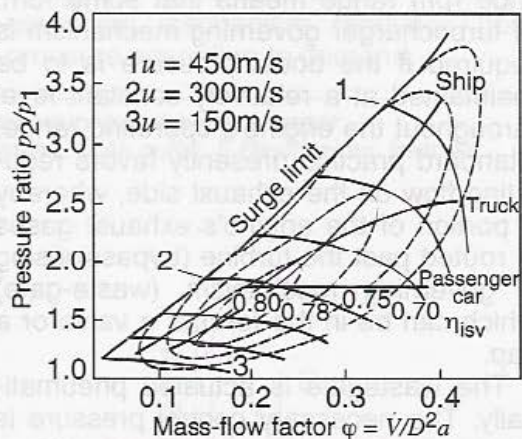**Compression graph with typical engine operation curves valid for all displacements**

Water-cooled bearing housings are employed for exhaust-gas temperatures in excess of 850°C . The rear wall of the compressor seals the compressor side of the bearing housing.

The housing of the radial compressor is generally made of cast aluminum. An air bypass valve can be integrated in the housing for special applications.

Turbine housings differ substantially according to intended use. Casting materials for turbine housings range from GGG 40 to NiResist D5 (depending upon exhaust-gas temperature). Exhaust-gas

twin-flow turbine housing in which the two streams join just before reaching the impeller. This housing configuration is employed to achieve pulse turbocharging, in which the pressure of the exhaust-gas is supplemented by its kinetic energy.

In contrast, in the case of constant-pressure turbocharging, only the pressure energy of the exhaust-gas is utilized, and single-flow turbine housings can be employed. This configuration has become especially popular for use in conjunction with water-cooled turbine housings on marine engines. The exhaust-gas turbochargers on heavy-duty engines often incorporate a nozzle ring upstream from the turbine. The nozzle ring provides a particularly smooth and consistent stream to the impeller while allowing fine adjustment of the flow through the turbine.

Exhaust-gas turbochargers for passenger cars generally use single-flow turbine housings. However, the car engine's wide rpm range means that some form of turbocharger governing mechanism is required if the boost pressure is to be maintained at a relatively constant level throughout the engine's operating range. Standard practice presently favors regulating flow on the exhaust side, whereby a portion of the engine's exhaust gases is routed past the turbine (bypass) using a governing mechanism (waste-gate) which can be in the form of a valve or a flap.

The wastegate is actuated pneumatically. The necessary control pressure is tapped-off from the pressurized side of the turbocharger, making it possible to combine turbocharger and wastegate in a single unit.

The available energy is exploited more efficiently by governing systems incorporating turbines with variable blade geometry. With this system, the turbine's flow resistance is modified continuously to achieve maximum utilization of the exhaust energy under all operating conditions.

Of all the potential designs, adjustable guide blades have achieved general acceptance, as they combine a wide control range with high efficiency levels.

simple adjustment of the blade angle. The blades, in turn, are swiveled to the desired angles using adjusting cams, or directly via adjusting levers attached to the individual blades. The pneumatic actuator can operate with either vacuum or positive pressure. Microelectronic control systems can exploit the advantages of variable turbine-blade geometry by providing optimal boost pressure throughout the engine's operating range.


Pressure-wave superchargers

The pressure-wave supercharger exploits the dynamic properties of gases, using pressure waves to convey energy from the exhaust-gas to the intake air. The energy exchange takes place within the cells of the rotor (cell-type wheel), which also depends upon an engine-driven belt for synchronization and maintenance of the pressure-wave exchange process.

Inside the rotor, the actual energy-exchange process proceeds at the speed of sound. This depends upon exhaust-gas temperature, meaning that it is essentially a function of engine torque, and

Pressure-wave supercharger

1 Engine, 2 Cell-type compressor wheel, 3 Belt drive, 4 High-pressure exhaust-gas, 5 Pressurized air, 6 Low-pressure air intake, 7 Low-pressure exhaust outlet.

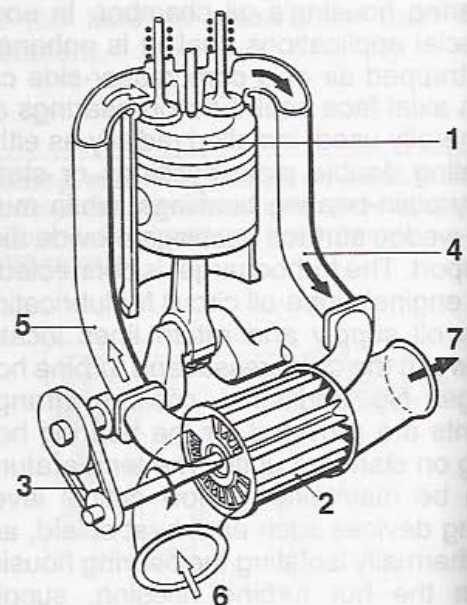

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.