

United States Patent [19]

Sherman et al.

[11] Patent Number: **4,941,236**

[45] Date of Patent: **Jul. 17, 1990**

- [54] **MAGNETIC CLASP FOR WRISTWATCH STRAP**
- [75] Inventors: **Norman Sherman, Woodbury; Victor Shiff, Waterbury, both of Conn.**
- [73] Assignee: **Timex Corporation, Waterbury, Conn.**
- [21] Appl. No.: **375,990**
- [22] Filed: **Jul. 6, 1989**
- [51] Int. Cl.⁵ **A44B 21/00; A44C 5/18**
- [52] U.S. Cl. **24/303; 24/71 J; 24/265 WS**
- [58] Field of Search **24/303, 49 M, 265 WS, 24/71 J, 688; 292/251.5**

- 4,615,185 10/1986 Bollinger 63/5 R
- 4,620,725 11/1986 Maehashi 281/45
- 4,760,714 8/1988 Mock 63/3

FOREIGN PATENT DOCUMENTS

- 1155824 10/1963 Fed. Rep. of Germany 24/303
- 074871 1/1961 France 24/303

Primary Examiner—Victor N. Sakran
Attorney, Agent, or Firm—William C. Crutcher

[57] ABSTRACT


A strap for holding a wristwatch has a pair of separable flexible strap ends adapted to curve around the wrist and to overlap one another to provide an overlapped section. At least one strap end of thermoplastic material has particles of permanently magnetizable material embedded in the thermoplastic material and magnetized to provide rows of alternating magnetic poles. The strap ends have surfaces contacting one another throughout the overlapped section and mutually nesting uniformly spaced interlocking teeth, whereby the magnetized particles provide a holding force resisting separation of the strap ends, while the nested teeth prevent sliding disengagement movement between strap ends.

10 Claims, 3 Drawing Sheets

[56] References Cited

U.S. PATENT DOCUMENTS

- 1,591,295 7/1926 Donaldson 24/265 WS
- 2,499,102 2/1950 Levine 24/71 J
- 2,615,227 10/1952 Hornik 24/230
- 2,648,884 8/1953 Loofboro 24/201
- 2,959,832 11/1960 Baermann 24/303
- 3,589,341 6/1971 Krebs 24/303
- 3,747,171 7/1973 Montague, Jr. 24/265 WS
- 4,197,618 4/1980 Bourguignon 24/303
- 4,255,837 3/1981 Holtz 24/243 R

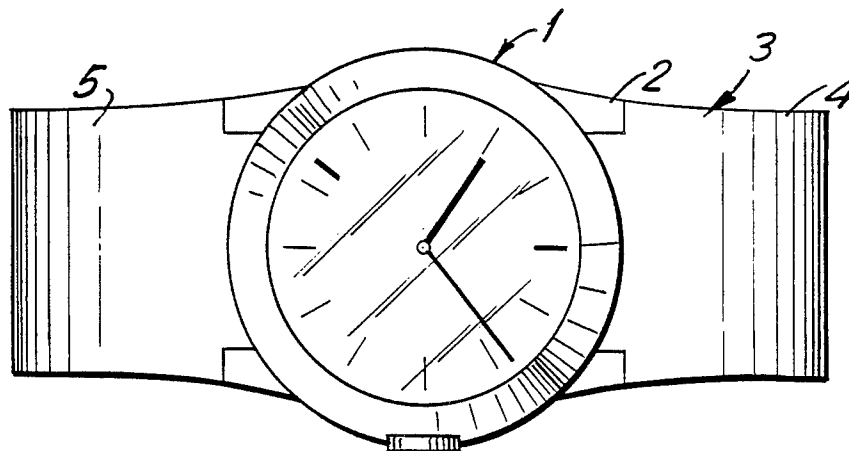

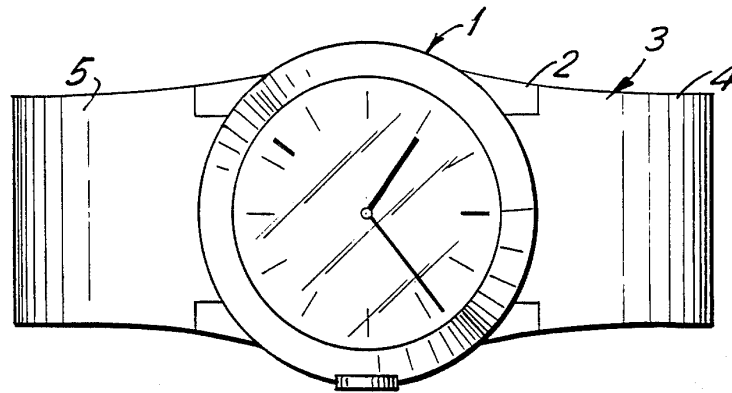


FIG. 1

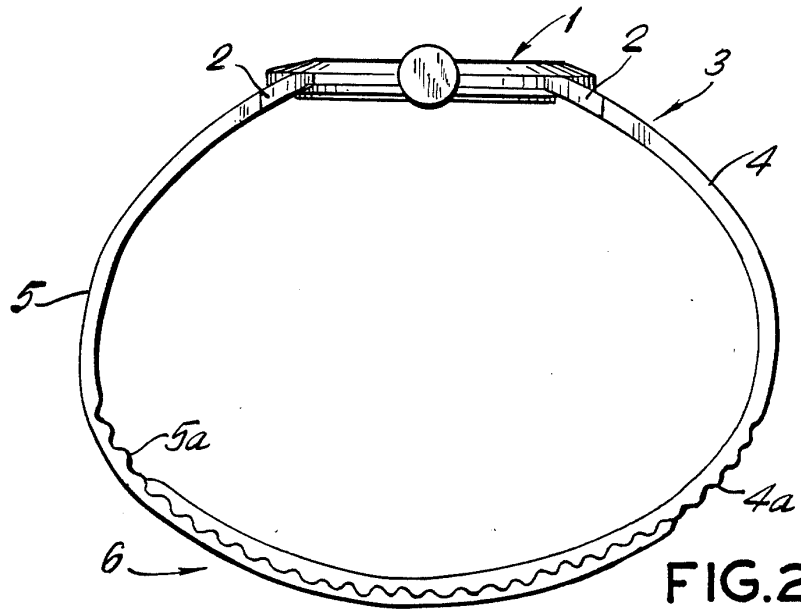


FIG. 2




FIG. 3

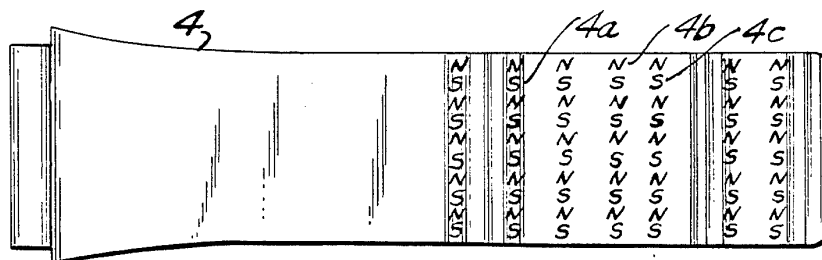


FIG. 4

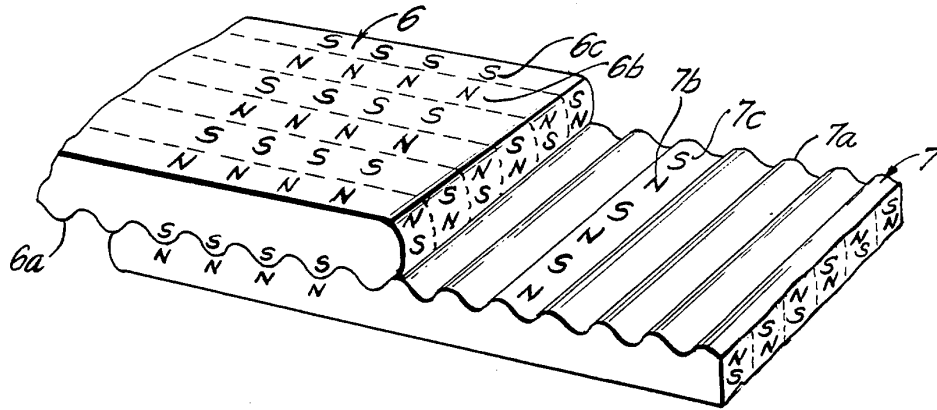


FIG. 5

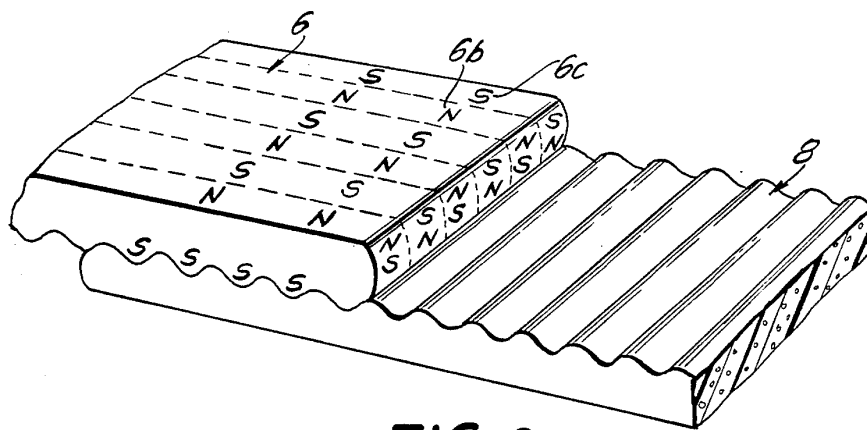


FIG. 6

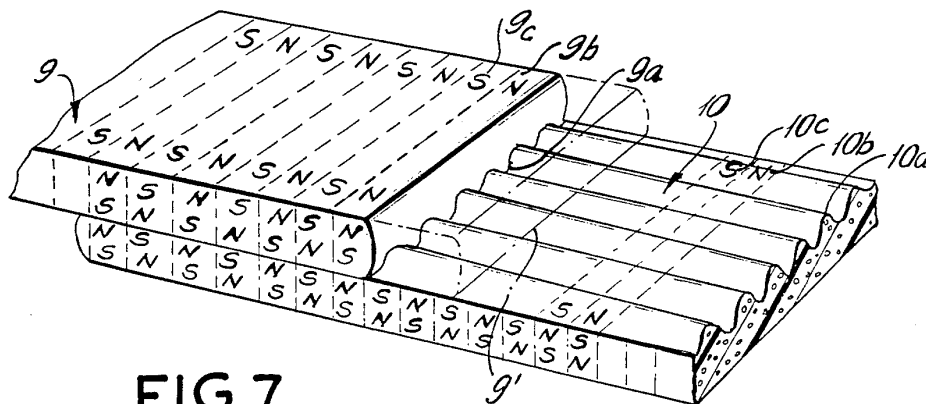


FIG. 7

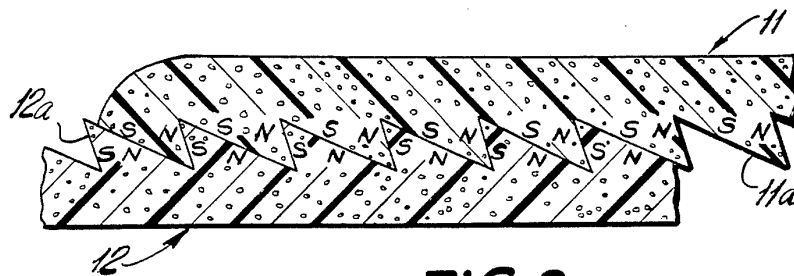


FIG. 8

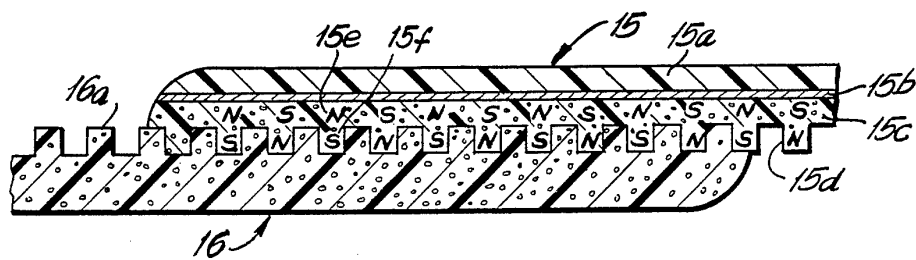


FIG. 9

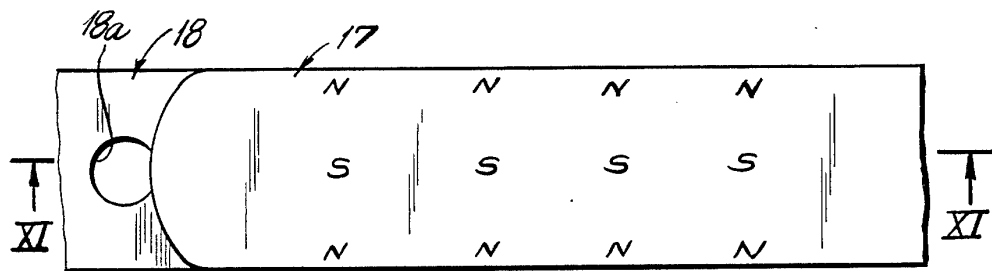


FIG. 10

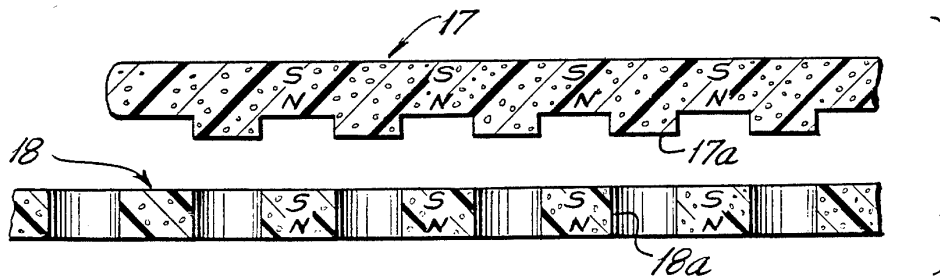


FIG. 11

MAGNETIC CLASP FOR WRISTWATCH STRAP**BACKGROUND OF THE INVENTION**

This invention relates generally to straps for wrist instruments, especially wristwatches and relates to improved clasps for attaching the strap ends around the wrist of the wearer. More particularly, the invention relates to an improved wristwatch flexible strap and clasp attachment.

Conventional wristwatches are held on the wrist by leather, metal or plastic straps, bands or bracelets, which may be expanded to go over the wrist or attached around the wrist by attaching strap ends with buckle, clasp or other type of detachable fasteners. This invention relates to wristwatch attachments employing a flexible strap with a pair of strap ends. Typically, the strap ends are connected with a buckle which provides for adjustment of the strap length. The buckle adds to the thickness of the strap, requires a "keeper" to keep the tongue of the strap in place, and sometimes is unsightly or has corners which catch upon sleeves or clothing.

Other types of clasps have been suggested for jewelry, wrist instruments and wristwatches for straps with overlapping strap ends. One design has opposing members coated with fibrous material on one strap end and a layer of material having resilient hook-like members on the other strap end (sold under the registered trademark Velcro ®), such a construction being shown in Montague U.S. Pat. No. 3,747,171, issued July 24, 1973. Another type of bracelet clasp suitable for a strap of flexible thermoplastic material such as polyurethane comprises a sleeve on one strap end with transverse internal teeth and a tongue on the other strap end with complementary nesting teeth, such a construction being shown in Bollinger U.S. Pat. No. 4,615,185, issued Oct. 7, 1986. Such construction requires a sleeve to provide a transverse holding force to maintain the complementary teeth engaged.

Permanent magnets have been suggested in the past for providing a separable clasp for jewelry, animals' collars or the like. For example, Loofboro U.S. Pat. No. 2,648,884, issued Aug. 18, 1953 describes a magnetic clasp of two rigid, two-pole, permanent magnets with an interlocking tongue and groove connection to mechanically lock the sections against relative sliding movement tending to separate the clasp. Another magnetic clasp which is intended to disengage without catching is provided for animal collars as shown in Krebs U.S. Pat. No. 3,589,341, issued June 29, 1971. Still another magnetic clasp for jewelry having two rigid co-acting magnets encased in plastic sheaths discloses a variety of mechanical interlocking protuberances and indentations to prevent sliding separation of the magnetically attracted members.

Holtz U.S. Pat. No. 4,255,837 issued Mar. 17, 1981 and Maehaski U.S. Pat. No. 4,620,725 issued Nov. 4, 1986 each show a pair of sheets of flexible synthetic resin having magnetizable powder therein, permanently magnetized into rows of alternating magnetic polarity providing a holding force between sheets. However, there are no provisions for ridges, protuberances or teeth preventing sliding movement between the magnetically attracted surfaces.

Accordingly, one object of the present invention is to provide an improved flexible strap and clasp attachment for a wristwatch.

Another object of the invention is to provide an improved clasp for a flexible strap which eliminates buckles or other types of protruding members thereby permitting a thinner, more comfortable flexible strap attachment.

Another object is to provide an improved clasp for a wristwatch which is secured, yet easy to engage when desired.

DRAWINGS

The invention, both as to organization and method of practice, together with further objects and advantages thereof, will best be understood with reference to the following description, taken in connection with the accompanying drawings, in which:

FIG. 1 is a plan view of a wristwatch and strap as worn on the wrist;

FIG. 2 is an end elevational view of the wristwatch and strap shown in FIG. 1;

FIG. 3 is a side elevational view of one of the flexible strap ends before it is attached to the wristwatch;

FIG. 4 is a plan view of the strap end shown in FIG. 3;

FIGS. 5, 6 and 7 enlarged schematic perspective views of three alternate forms of the improved strap and clasp;

FIG. 8 is an enlarged cross-sectional, elevational view of a strap portion showing an alternate form of the invention;

FIG. 9 is an enlarged cross-sectional elevational view of a strap portion showing yet another form of the invention;

FIG. 10 is an enlarged plan view of another alternate form of the invention showing overlapped strap ends before connection; and

FIG. 11 is a cross-sectional, elevational view taken along lines XI—XI of FIG. 10.

SUMMARY OF THE INVENTION

Briefly stated, the invention is practiced by providing a strap having a pair of separable flexible strap ends adapted to curve around the wrist of a wearer and to overlap one another to provide an overlapped section, at least one strap end including at least one ply of thermoplastic material having particles of permanently magnetizable material embedded in the thermoplastic material and magnetized to provide a plurality of rows of alternating magnetic poles, the strap ends having surfaces contacting one another throughout the overlapped section and defining mutually nesting uniformly spaced protuberances and indentations, such as interlocking teeth, whereby the magnetized particles provide a holding force resisting separation of the strap ends, while the nested protuberances and indentations prevent sliding disengaging movement between strap ends. Preferably, the magnetic field is oriented in a longitudinal direction so that when the strap is attached around the wrist, the toroidal path of the magnetic field will reduce stray magnetic flux.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to FIG. 1 of the drawing, a wristwatch shown in FIGS. 1 and 2 of the drawing, includes a watch case 1 with strap attachment lugs 2 and flexible

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.