

### US005130005A

## United States Patent [19]

### Hurwitt et al.

Patent Number:

5,130,005

Date of Patent: [45]

Jul. 14, 1992

| [54] | MAGNETRON SPUTTER COATING<br>METHOD AND APPARATUS WITH |      |         | Anderson et al<br>Bonyhard et al |
|------|--|------|---------|----------------------------------|
|      | ROTATING MAGNET CATHODE                                | FORE | CIGN! D | ATENT DOCUMENT                   |

[75] Inventors: Steven Hurwitt, Park Ridge, N.J.; Robert Hieronymi, Rock Cavern; Israel Wagner, Monsey, both of N.Y.

Materials Research Corporation, [73] Assignee:

Orangeburg, N.Y.

[21] Appl. No.: 626,987

[22] Filed: Dec. 13, 1990

### Related U.S. Application Data

[63] Continuation-in-part of Ser. No. 606,701, Oct. 31, 1990, abandoned, which is a continuation-in-part of Ser. No. 570,943, Aug. 22, 1990, which is a continuation-in-part of Ser. No. 339,308, Apr. 17, 1989, Pat. No. 4,957,605.

| [51] | Int. Cl.5       | C23C 14/35             |
|------|-----------------|------------------------|
| [52] | U.S. Cl         | 204/192.12; 204/298.2; |
|      |                 | 204/298.09             |
| [58] | Field of Search | 204/192.12, 298.09,    |
|      |                 | 204/298.2              |

### [56] References Cited

### U.S. PATENT DOCUMENTS

| 3,393,142<br>3,956,093<br>4,162,954<br>4,180,450<br>4,239,611   | 7/1968<br>5/1976<br>7/1979<br>12/1979<br>12/1980   | Moseson 204/298.06   McLeod 204/192.12   Morrison, Jr. 204/298.19   Morrison, Jr. 204/298.19   Morrison, Jr. 204/298.19   |
|---|--|---|
| 4,265,729<br>4,401,539<br>4,444,643<br>4,461,688<br>4,498,969<br>4,525,264<br>4,631,106<br>4,714,536<br>4,746,417<br>4,761,219<br>4,793,911 | 5/1981<br>8/1983<br>4/1984<br>7/1984<br>2/1985<br>6/1985<br>12/1986<br>12/1987<br>5/1988<br>8/1988 | Morrison, Jr. 204/298.19   Abe et al. 204/192.13   Garrett 204/298.2   Morrison, Jr. 204/192.12   Ramachandran 204/192.12   Hoffman 204/298.22   Nakazato et al. 156/345   Freeman et al. 204/298.2   Sasaki et al. 204/298.37   Kemmerer et al. 204/298.27 |
| 4,892,633<br>4,943,361  | 1/1990<br>7/1990   | Welty   |

| 4,995,958 | 2/1991 | Anderson et al. | 204/298.2  |
|-----------|--------|-----------------|------------|
| 5,026,470 | 6/1991 | Bonyhard et al. | 204/298.16 |


### FOREIGN PATENT DOCUMENTS

| 0054201   | 6/1982  | European Pat. Off 204/298.37   |
|-----------|---------|--------------------------------|
| 0211412   | 7/1986  | European Pat. Off 204/298.2    |
| 0334347   | 3/1989  | European Pat. Off 204/298.2    |
| 0365249   | 10/1989 | European Pat. Off 204/298.2    |
| 2707144   | 8/1977  | Fed. Rep. of Germany 204/298.2 |
| 59-215484 | 12/1984 | Japan 204/298.2                |
| 61-291971 | 12/1986 | Japan 204/298.2                |
| 63-149374 | 6/1988  | Japan 204/298.2                |
| 63-290275 | 11/1988 | Japan 204/298.2                |
| 63-307270 | 12/1988 | Japan 204/298.2                |


Primary Examiner—Aaron Weisstuch Attorney, Agent, or Firm-Wood, Herron & Evans

A target of a thickness, which varies across its radius according to the amount of material required to be sputtered, is supported in a nest in a chamber of a sputter coating apparatus. Positioned behind the nest is a rotating magnet carrier having arranged thereon in a closed loop a permanent or electro magnetic strip, but preferably a flexible permanently magnetic material, with portions near the rim of the target and portions near, but not on, the target center about which the magnet rotates. The magnetic loop is transversely polarized with one pole toward the target rim and one toward the target center so that its field will enclose the rim of the target within a magnetic tunnel that traps a plasma over the target. Lumped magnets across the center from the strip support the plasma near the center so as to cause some sputtering at the target center. Other lumped magnets adjacent the strip help sharpen the field so that a desired distribution of sputtering can be achieved. Enclosed in a sealed space behind and in thermal contact with the target nest is the carrier from which the magnets project to facilitate the flow of cooling fluid across the back surface of the nest to cool the target as the carrier rotates.

### 22 Claims, 5 Drawing Sheets

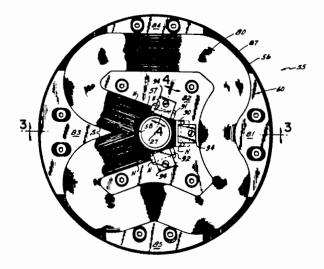




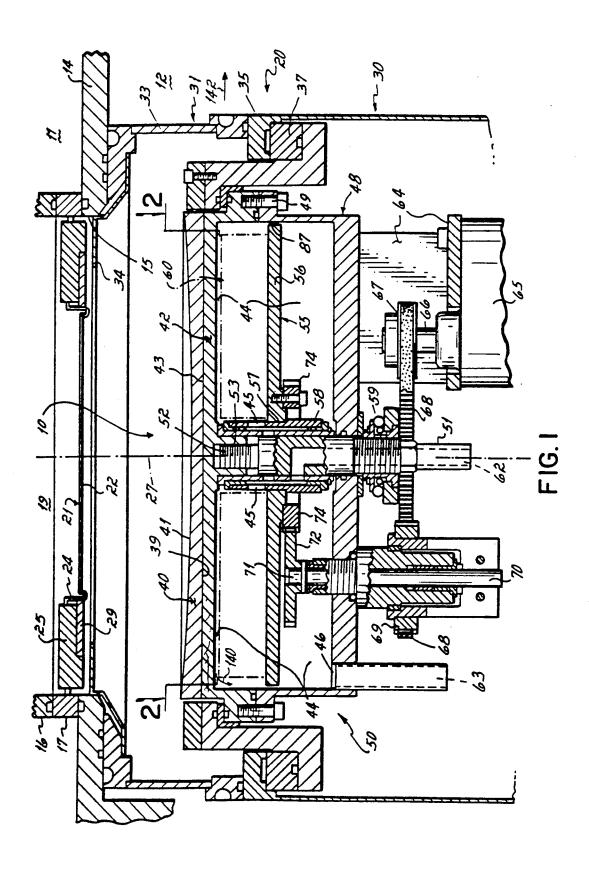





U.S. Patent

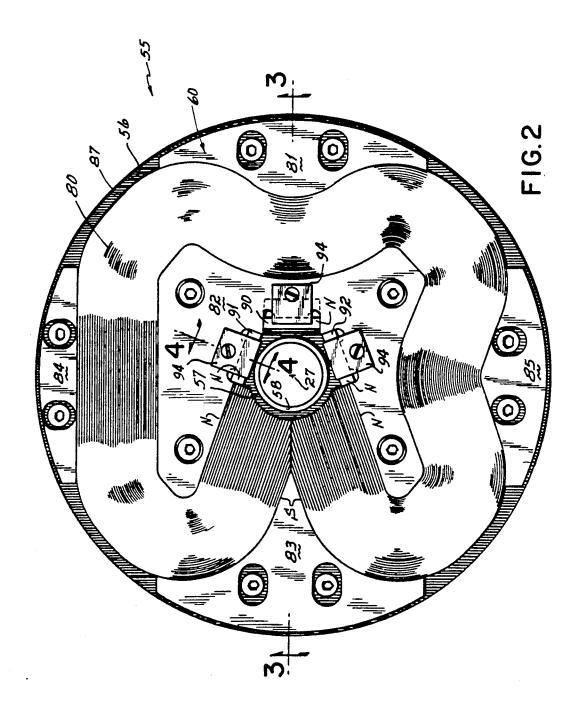



July 14, 1992

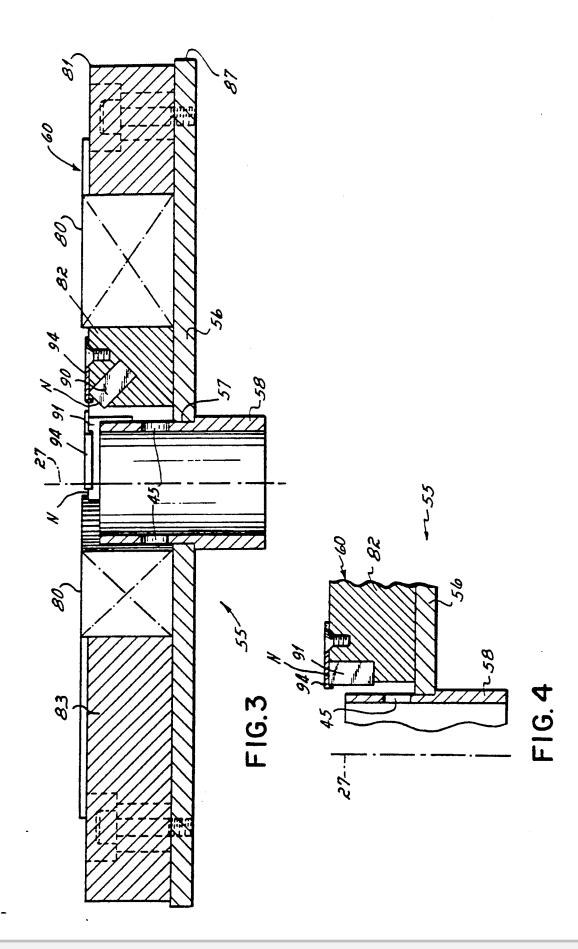

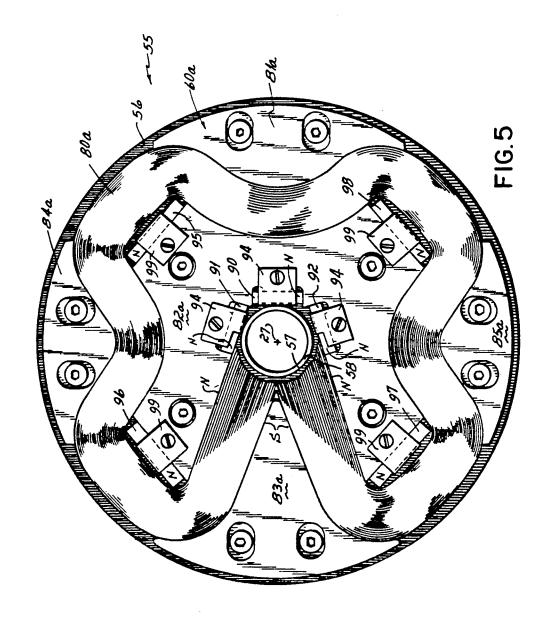

# DOCKET A L A R M

# Explore Litigation Insights



Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## **Real-Time Litigation Alerts**



Keep your litigation team up-to-date with **real-time** alerts and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## **Advanced Docket Research**



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## **Analytics At Your Fingertips**



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

### API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

### **LAW FIRMS**

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

### **FINANCIAL INSTITUTIONS**

Litigation and bankruptcy checks for companies and debtors.

### **E-DISCOVERY AND LEGAL VENDORS**

Sync your system to PACER to automate legal marketing.

