

A Critical Review of MEMS Gyroscopes Technology and Commercialization Status



Steven Nasiri, 408-988-7339 x108, snasiri@invensense.com
3150A Coronado Drive, Santa Clara, California 95054

Abstract

Gyroscopes are expected to become the next “killer” application for the MEMS industry in the coming years. A multitude of applications already have been developed for consumer and automotive markets. Some of the more well known automotive applications such as vehicle stability control, navigation assist, roll over detection are only used in high-end cars, where cost is not a major factor. Examples of consumer applications are 3D input devices, robotics, platform stability, camcorder stabilization, virtual reality, and more. Primarily due to cost and the size most of these applications have not reached any significant volume. This paper provides a top-level review of various vibrating mass gyroscopes and examines the technology and packaging methodology for top four commercially available gyroscopes companies. Advancement in MEMS technology, fueled by the optical bubble, such as, wafer-scale-integration, and wafer-scale-packaging will be reviewed. New opportunities for design and development of the next generation of low-cost and high-performance gyroscopes based on the latest MEMS technologies are discussed.

Introduction

Micromachined inertial sensors, consisting of accelerometers and gyroscopes, are one of the most important types of silicon-based sensors. Microaccelerometers alone have the second largest sales volume after pressure sensors. It is believed that gyroscopes will soon be mass-produced at similar volumes once manufacturers are able to meet a \$10 price target. Applications for gyroscopes are very broad. Some example for these applications are; *automotive*; vehicle stability control, rollover detection, navigation, load leveling/suspension control, event recording, collision avoidance; *consumers*, computer input devices, handheld computing devices, game controllers, virtual reality gear, sports equipment, camcorders, robots; *industrial*, navigation of autonomous (robotic) guided vehicles, motion control of hydraulic equipment or robots, platform stabilization of heavy machinery, human transporters, yaw rate control of wind-power plants; *aerospace/military*; platform stabilization of avionics, stabilization of pointing systems for antennas, unmanned air vehicles, or land vehicles, inertial measurement units for inertial navigation, and many more.

This paper presents a review of silicon MEMS gyroscopes (rate sensors), their production status, and challenges towards fabrication of the next generation of lowcost gyroscopes. Following a brief introduction to gyroscope operating principles and performance specifications, the present status in the commercialization of micromachined rate sensors are discussed.

Inertial sensors have seen a steady improvement in their performance and their fabrication technology, and today, microaccelerometers are among the highest volume MEMS sensors for the automotive. While the performance of gyroscopes has improved by a factor of 10 every two years, their costs have not dropped as was originally predicted. The initial drive for lower cost, greater functionality, higher levels of integration, and higher volume had slowed down during the optical bubble, when the sensor market was over taken with high potential returns promised by the telecom market. Although the telecom boom had slowed the wide spread development in gyroscopes, it poured billions of dollars into development of next generation MEMS technologies, equipment, modeling tools, foundries, and micromachine experts. This paper will discuss some of these advancements in MEMS development and their potential use in the creation of the next generation of advanced, integrated MEMS gyroscopes that can meet the market cost expectations, and further their performance.

Micromachined Gyroscope Technology

Operating Principles and Specifications

Almost all reported micromachined gyroscopes use vibrating mechanical elements (proof-mass) to sense rotation. They have no rotating parts that require bearings, and hence they can be easily miniaturized and batch fabricated using micromachining techniques. All vibratory gyroscopes are based on the transfer of energy between two vibration modes of a structure caused by Coriolis acceleration. Coriolis acceleration, named after the French scientist and engineer G. G. de Coriolis (1792–1843), is an apparent acceleration that arises in a rotating reference frame and is proportional to the rate of rotation, Fig. 1.

Vibratory gyroscopes were demonstrated in the early 1980's. An examples of this type of devices is quartz tuning forks like the Quartz Rate Sensor by Systron Donner. Although quartz vibratory gyroscopes can yield very high quality factors at atmospheric pressure with improved level of performance, due to use of quartz as the primary material, their batch processing is not compatible with IC fabrication technology. In the late 1980's, after successful demonstration of batch-fabricated silicon accelerometers, some efforts were initiated to replace quartz with silicon in micromachined vibratory gyroscopes. Charles Stark Draper Laboratory demonstrated one of the first batch fabricated silicon micromachined rate gyroscopes in 1991.

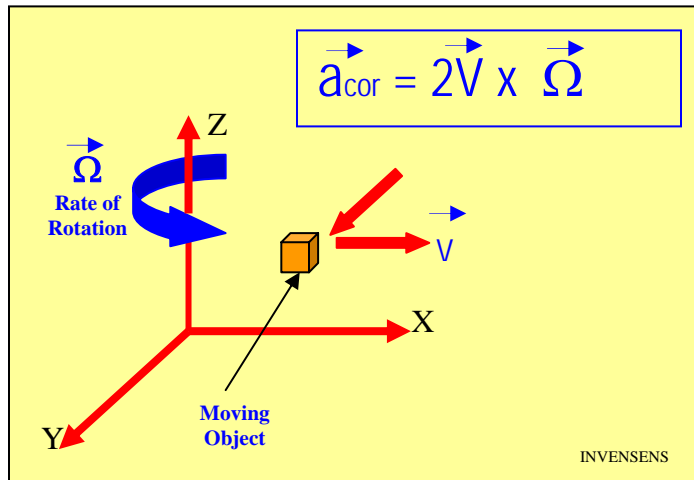


Figure1- Coriolis accelerometer concept

In general, gyroscopes can be classified into three different categories based on their performance: inertial-grade, tactical-grade, and rate-grade devices. Table 1 summarizes the requirements for each of these categories. Over the past decade, much of the effort in developing micromachined silicon gyroscopes has concentrated on "rate-grade" devices, primarily because of their use in automotive applications. Automotive applications generally requires a full-scale range of at least 50°-300° /s and a resolution of about 0.5°-0.05 °/s in a bandwidth of less than 100 Hz depending on the application. The operating temperature is in the range from -40 to 85° C.

Tuning fork gyroscopes contain a pair of masses that are driven to oscillate with equal amplitude but in opposite directions. When rotated, the Coriolis force creates an orthogonal vibration that can be sensed by a variety of mechanisms. The Draper Lab gyro, figure 2, uses comb-type structures to drive the tuning fork into resonance, and rotation about either in-plane axis results in the moving masses to lift, a change that can be detected with capacitive electrodes under the mass.

Vibrating-Wheel Gyroscopes have a wheel that is driven to vibrate about its axis of symmetry, and rotation about either in-plane axis results in the wheel's tilting, a change that can be detected with capacitive electrodes under the wheel, Figure 3. It

Table 1; Performance requirement for different type of gyroscopes

Parameter	Rate Grade	Tactical Grade	Inertial Grade
Angle Random Walk, °/√h	>0.5	0.5-0.05	<0.001
Bias Drift, °/h	10-1000	0.1-10	<0.01
Scale Factor Accuracy, %	0.1-1	0.01-0.1	<0.001
Full Scale Range (°/sec)	50-1000	>500	>400
Max. Shock in 1msec, g's	10 ³	10 ³ -10 ⁴	10 ³
Bandwidth, Hz	>70	-100	-100

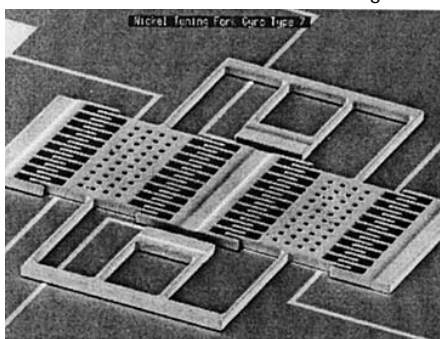


Figure 2 - The first working prototype of the Draper Lab comb drive tuning fork

is possible to sense two axes of rotation with a single vibrating wheel. A surface micromachined polysilicon vibrating wheel gyro, Figure 4, has been designed at the U.C. Berkeley Sensors and Actuators Center that demonstrated this capability.

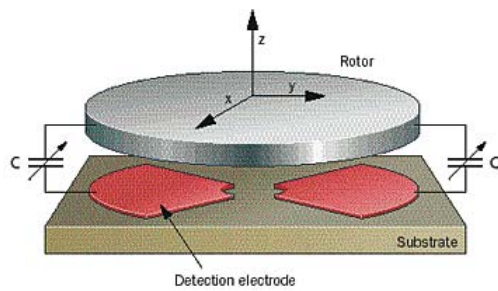


Figure 3 – Schematic design concept for Robert Bosch vibrating wheel. This design provides X/Y-axis sensing capability, and is being produced in production using polysilicon fabrication

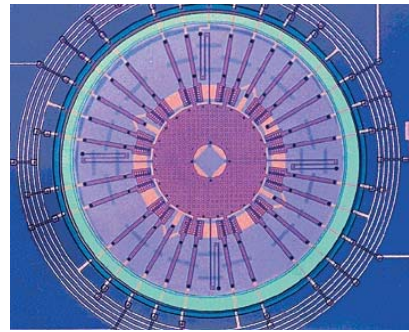


Figure 4. This polysilicon surface-micromachined vibrating wheel gyro was designed at the Berkeley Sensors and Actuators Center.

Wine Glass Resonator Gyroscopes. A third type of gyro is the wine glass resonator. Fabricated from fused silica, this device is also known as a hemispherical resonant gyro. Researchers at the University of Michigan have fabricated resonant-ring gyros in planar form. In a wine glass gyro, the resonant ring is driven to resonance and the positions of the nodal points indicate the rotation angle. The input and output modes are nominally degenerate, but due to imperfect machining some tuning is required.

Challenges with Designing a MEMS Gyroscope

This section reviews some of the different choices that can be made for design of a vibrating gyroscope. Table 2 provides a summary of various design choices possible for a vibrating gyroscope, with over 2500 potential combinations. Most of research and development activities at the university level, with the University of California Berkeley being the most active, have been on surface micromachined gyros. One of the primary drivers for this has been DARPA and military interest for development of a single chip integrated six-axis inertial measurement units (IMU).

Gyroscopes are much more challenging sensor products than acceleration or pressure sensors. Gyroscopes are basically two high performing MEMS devices integrated into one single device that have to work together to produce results. They are a self-tuned resonator in the drive axis, and a micro-g sensor in the sensing axis. The absolute magnitude of the Coriolis force sensed is orders of magnitude lower than any high volume production MEMS accelerometer. Capacitive sensors are generally used for measuring these small changes of capacitance. Gyroscope performance is very sensitive to all potential manufacturing variations, packaging, linear acceleration, temperature, etc. To achieve high performance and lowcost, lots of care must be taken during the initial design. Gyroscope designers must achieve a solution that can be insensitive to most of these potential variations.

Application	Optical Gyro	Ring Laser Gyro	Vibrating Gyro
Design Style		Z-axis Sensor	X/Y-axis
		Vibrating Mass	Vibrating Ring
		Linear Vibration	Rotary Vibration
		Single Mass	Dual Mass Tuning Fork
MEMS Technology	Bulk Silicon	Poly Silicon	Mixed Process
Actuation Mechanism	Electro-Static	Electro-	Piezoelectric
	Parallel Plats	Torsional Plats	Comb Drive
Coriolis Sensor	Electro-Static	Electro-Magnetic	Piezoelectric
	Parallel Plats	Comb Fingers	

Table 2: Shows the various options, >2500, that could be used for designing a gyroscope.

Gyroscope Packaging Challenges

One of the most difficult decisions that can have the biggest effect on the cost is the choice for the final package. Generally, packaging is one of the highest components of the final cost for most types of MEMS sensors. In majority of cases, sensor designers and MEMS experts are not packaging experts. MEMS designers are primarily focused on the design and development of the sensor element, with the objective of demonstrating performance on the bench. The task of taking the MEMS sensor element and package it is the packaging engineer's problem. In order to have the lowest cost MEMS product packaging issues must be addressed up front in the initial phase of design cycle. MEMS by definition is a mechanical feature that can be manufactured in batch processing with little cost differential. It is very unlikely that a lowcost solution can be realized without addressing packaging issues properly on the outset.

Path to High-Performance and Low-Cost Gyroscopes

The main challenge for the MEMS gyroscope industry has been achieving high-performance and low-cost MEMS solutions. Although there are several high-performance MEMS gyroscopes in production already, they are still fairly costly for most applications. Today's automotive gyroscopes cost more than \$60 for more demanding applications like vehicle dynamic control, and navigation assist, and are slightly below that for less demanding ones like roll-over detection. The automotive market has developed many safety and comfort related applications that relies on rate-sensors. Today they are only offered on the high-end cars, where cost is less of a concern. There are also many consumer applications that are waiting for smaller and more affordable gyroscopes, like input devices, camcorder stability control, and more. To benefit from all these high volume applications, a smaller size and lower cost gyroscopes are needed.

A quick review of the price curve for MEMS accelerometers, figure 5, shows that high volume occurred once unit prices achieved \$3 target prices. The initial manufacturers of these type of sensors, for the first few years were Lucas-Nova Sensors, and EG&G-IC-sensors. In spite of millions of dollars invested in automation, capacity build up, and quality control systems, they were only able to reduce their cost to just under \$10, and could not meet market demand for \$3. Analog, Motorola, and few other companies recognized the market needs and focused their development from the beginning on fabrication of low cost accelerometers. They succeeded in the design and development of a new generation of accelerometers products that broke the price barrier. This allowed the market for these products to reach its full potential. All the original companies that failed to recognize the need were forced out of the market and are no longer producing accelerometers.

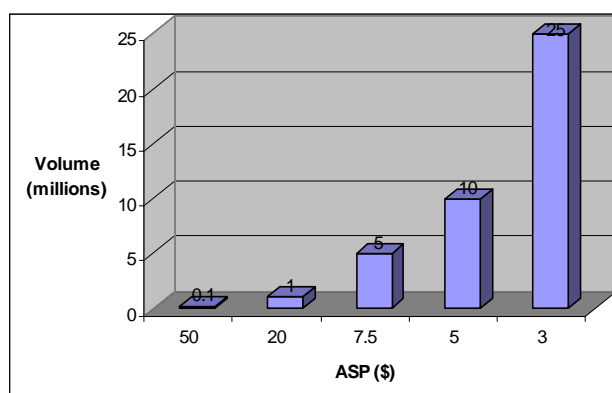


Figure 5: Shows automotive accelerometers price elasticity

There is a real market need for lowcost gyroscopes not unlike the accelerometers a decade ago. Once the cost targets are met this family of MEMS sensor will enjoy a drastic increase in volume and will become the next high-volume application for the MEMS industry.

Vibrating Gyroscope Production Status

This section provides some insight into the gyroscope designs, performance, and packaging of the top four vibrating gyroscope manufacturers worldwide, representing more than 95% of unit volumes shipped for this class of sensors.

Robert Bosch has been the most active in design and fabrication of silicon vibratory gyroscopes. They have 50% of the gyro market for the automotive VDC, and related applications today. They are producing in high volume, with several million units shipped already. Bosch has developed both Z axis and X./Y axis rate sensors. Its Z-axis design, shown in figure 6, was introduced in 1998 and uses electromagnetic drive with capacitive sensing. The X/Y-axis gyro is a rotary vibrating mass, which was briefly discussed earlier and the schematic of this design is shown in figure 3. The MEMS sensor element along with its custom ASIC and all the discrete component are packaged in a hermetically sealed metal can, figure 7 and 8 which is then place inside its automotive style plastic housing, figure 9, with integral connectors and mounting brackets.

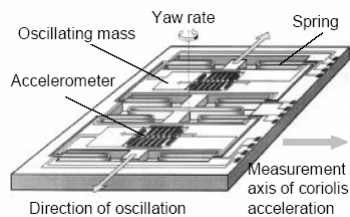


Figure 6; Bosch silicon dual mass tuning fork design, with Z-axis rate sense, in plan vibration and in plan sensing




Figure 7; Bosch MEMS sense element along with all supporting electronics, in a metal header package

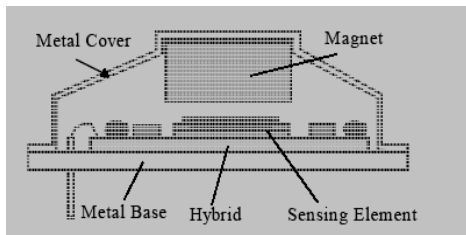


Figure 8; Bosch metal header cross section, showing the permanent magnet suspended over the sensor chip.



Figure 9; Bosch's gyroscope package with integral connector and mounting brackets

BEI Systron Donner is a major manufacturer of rate sensors for automotive. Their gyroscope is designed based on using one-piece quartz inertial sensor, figure 10. These micromachined inertial sensing elements measure angular rotational velocity, using tuning fork vibratory principals and piezoelectric actuation and sensing. These sensors generate a signal output proportional to the rate of rotation sensed. Each sensor element is packaged in a hermetically sealed metal headers, figure 11, which are then combined with discrete electronic to produce the finished modules products, figure 12.



Figure 10; Systron Donner quartz sensing element




Figure 11; individual quartz elements are packaged in a metal header



Figure 12; Packaged sensor element are packaged with electronics for automotive

Silicon Sensing Systems a joint venture between Sumitomo and British Aerospace, has brought to market an electromagnetically driven and sensed MEMS gyro, figure 14, with a permanent magnet sits above the MEMS device, figure 15. Current passing through the conducting legs creates a force that resonates the ring. This Coriolis-induced ring motion is detected by induced voltages as the legs cut the magnetic field.

Analog Devices has been working on MEMS gyros for many years, and has patented several concepts based on modified tuning forks. The company has recently introduced the ADXRS family of integrated angular rate-sensing gyros, in which the mass is tethered to a polysilicon frame that allows it to resonate in only one direction. Capacitive silicon sensing elements interdigitated with stationary silicon beams attached to the substrate measure the Coriolis-induced displacement of the resonating mass and its frame, Figure 13.

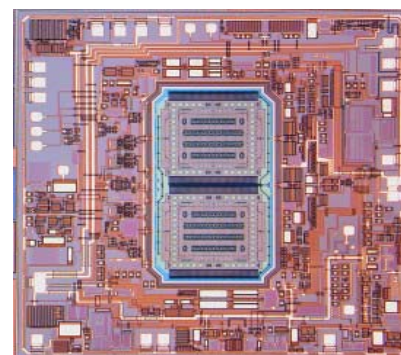


Figure 13. The iMEMS ADXRS angular rate-sensing gyro from Analog Devices

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.