




US 20030100274A1

(19) **United States**(12) **Patent Application Publication**  
**Brown**(10) **Pub. No.: US 2003/0100274 A1**(43) **Pub. Date: May 29, 2003**(54) **WIRELESS HEADSET-BASED  
COMMUNICATION**(52) **U.S. Cl. .... 455/90; 455/556; 455/557;  
455/550; 455/569**(75) **Inventor: Andrew Philip Brown, Temple Grafton  
(GB)**(57) **ABSTRACT**(73) **Assignee: Sendo International Limited, (HK)**(21) **Appl. No.: 10/065,895**(22) **Filed: Nov. 27, 2002**(30) **Foreign Application Priority Data**

Nov. 28, 2001 (GB) ..... GB 0128473.6

**Publication Classification**(51) **Int. Cl.<sup>7</sup> ..... H04B 1/38; H04M 1/00**

A wireless headset-based communication arrangement (200, 300) comprises a first subscriber unit (210), a wireless headset (212) associated with the first subscriber unit (210) to form a wireless communication apparatus; and a detector within the wireless communication apparatus to detect a spatial proximity of at least one second subscriber unit (220) or second wireless headset (222). In response to the detection, the wireless headset (212) associated with the first subscriber unit (210) is adapted to communicate directly (230) with the at least one second subscriber unit (220) or second wireless headset (222). One advantage of the present invention is that the functionality of a hands-free headset and the functionality of inter-headset communication are combined into a single headset apparatus.

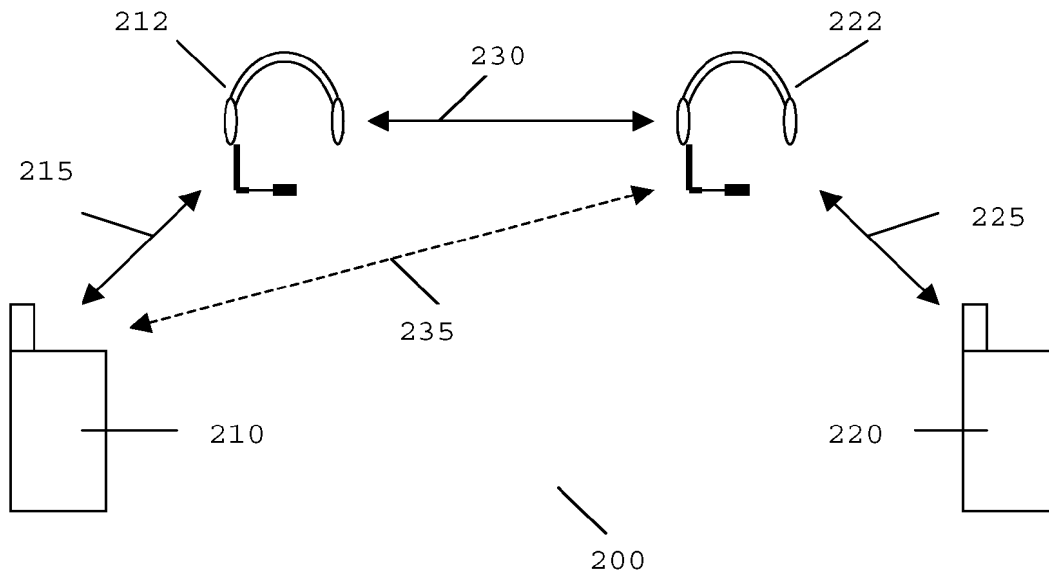

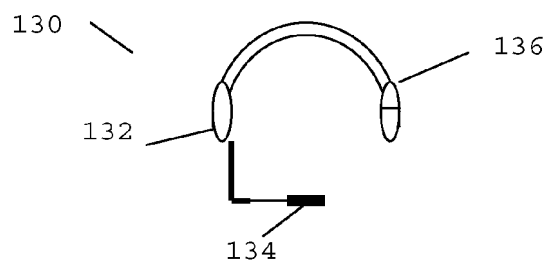


FIG. 1

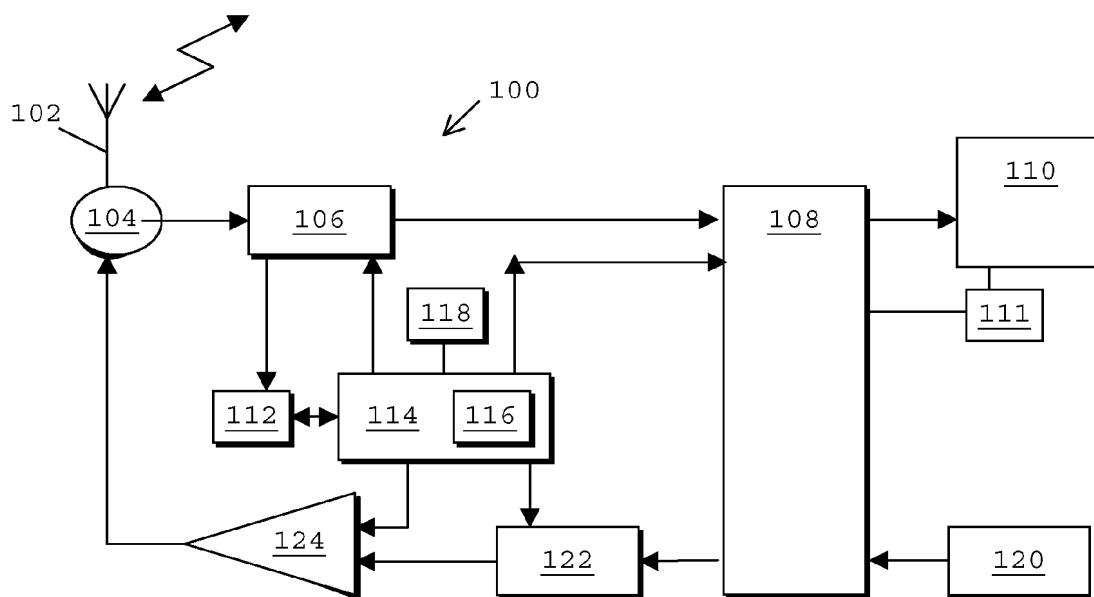


FIG. 2


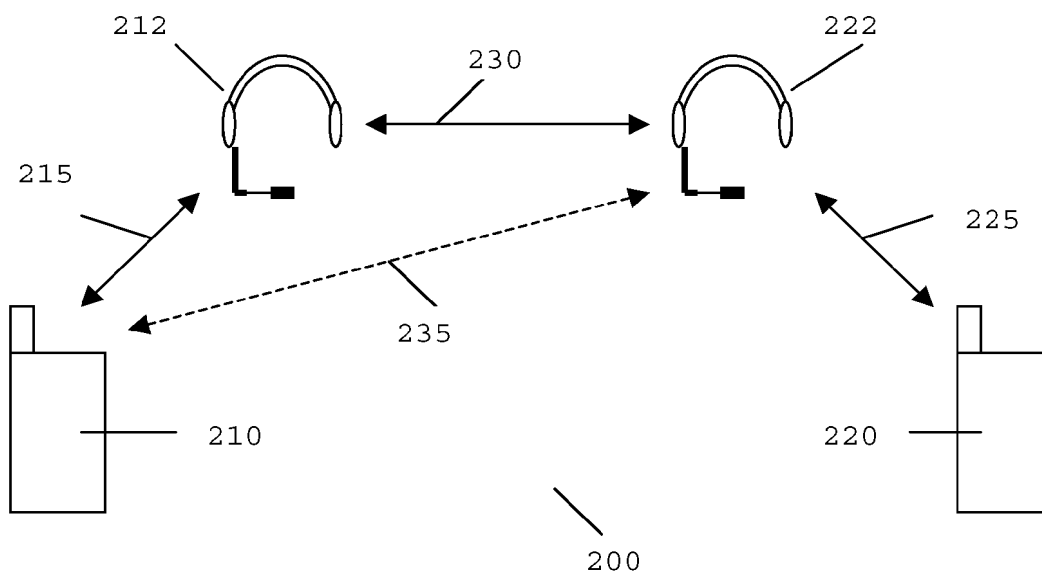


FIG. 3

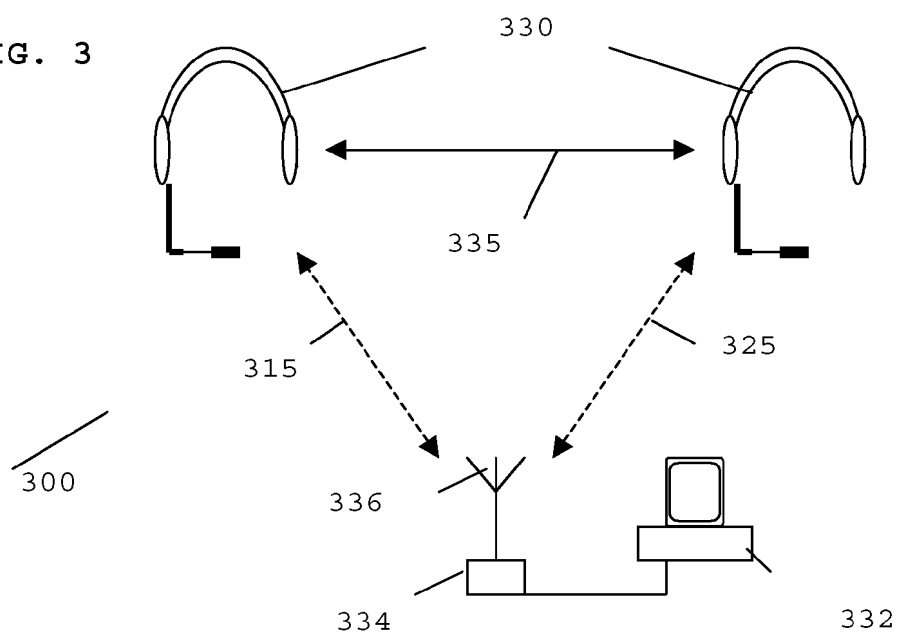

**WIRELESS HEADSET-BASED COMMUNICATION**

## Cross Reference to Related Applications

[0001] This application claims the benefit of UK Application No. GB 0128473.6 filed November 28, 2001.

## Background of Invention

## Field of the Invention

[0002] The present invention relates to a wireless headset-based communication arrangement, and in particular to an arrangement where a user uses a wireless headset with a subscriber communication unit to communicate with other subscriber units.

## Description of the Related Art

[0003] In the field of this invention it is known for wireless headsets to be used with communication devices, such as cordless telephones, mobile radios or cellular subscriber units. Wireless headsets are used to provide hands-free functionality of the communication device, and can be considered as a wireless extension of the device's communication capability.

[0004] When used in such a hands-free mode of operation, the communication device routes the received, demodulated and decoded signal to a short-range transmitter, instead of a microphone. The radio transmission from the short-range transmitter is picked up from a wireless receiver in the headset, where it is processed and passed to an audio enunciator in the headset to be relayed to the headset user.

[0005] In an alternative application of wireless headsets, it is also known for wireless communications to be set up between groups of people, where each person in the group uses a wireless headset. Such group communication is beneficial when the users are highly mobile, and communication on the "shared" channel is not needed to be secure. Furthermore, such wireless headset use in group communications is sometimes used when normal one-to-one conversation is not practical. Further applications of such group-communication wireless headset arrangements would include sporting events, where the groups are members of a team, or the referees.

[0006] However, the above two applications for using wireless headsets are very distinct, and have so far been addressed with individual stand-alone solutions. The inventor of the present invention has recognized this fact and that no single headset, presently available, is capable of facilitating both of the above functions. Furthermore, the inventor of the present invention has recognized scenarios where a multi-purpose wireless headset would be an advantage.

[0007] A need therefore exists for an improved wireless headset, wherein the abovementioned disadvantages may be alleviated.

## Summary of Invention

[0008] In accordance with a first aspect of the present invention, there is provided a wireless headset-based communication arrangement, as claimed in Claim 1.

[0009] In accordance with a second aspect of the present invention, there is provided a wireless headset, as claimed in Claim 9.

[0010] In accordance with a third aspect of the present invention, there is provided a communication device, as claimed in Claim 10.

[0011] In accordance with a fourth aspect of the present invention, there is provided a wireless headset, as claimed in Claim 11.

[0012] Further aspects of the invention are as claimed in the dependent Claims.

[0013] In summary, the present invention proposes inter-alia, to facilitate direct communication, using a short-range wireless communication link between a first wireless headset and a second wireless headset or associated subscriber unit. The short-range link is preferably used as an alternative to a normal communication link when the second wireless headset or associated subscriber unit are detected as being spatially near the first wireless headset or its associated first subscriber unit. In this manner, a wireless headset is able to provide two modes of operation, a first being "hands-free" communication with its associated first subscriber unit, and a second mode being direct (inter-headset) communication with other wireless headsets (or their associated subscriber unit(s)).

## Brief Description of Drawings

[0014] Exemplary embodiments of the present invention will now be described, with reference to the accompanying drawings, in which:

[0015] **FIG. 1** shows a block diagram of a subscriber unit and associated wireless headset arrangement adapted to support the inventive concepts of the preferred embodiments of the present invention;

[0016] **FIG. 2** illustrates a subscriber unit/wireless headset communication arrangement, in accordance with a first preferred embodiment of the present invention; and

[0017] **FIG. 3** illustrates a communication unit/wireless headset communication arrangement, in accordance with an alternative embodiment of the present invention.

## Detailed Description

[0018] The preferred embodiment of the present invention is described with reference to a portable cellular phone/wireless headset arrangement. However, it is within the contemplation of the present invention that the inventive concepts described herein are equally applicable to any other audio, video or image communication device, such as a personal data assistant (PDA), a portable or mobile radio, a laptop computer or a wirelessly networked Personal Computer (PC), where an optional short range communication link would be advantageous. It is envisaged that future wireless headset applications will not be limited to relaying audio communication, but will include relaying image or video signals to a screen attached to the headset, or to a virtual screen positioned in view of the headset user.

[0019] Referring first to **FIG. 1**, there is shown a block diagram of a cellular subscriber unit 100 adapted to support the inventive concepts of the preferred embodiments of the present invention. The subscriber unit 100 contains an antenna 102 preferably coupled to a duplex filter, antenna switch or circulator 104 that provides isolation between receiver and transmitter chains within the subscriber unit 100.

[0020] The receiver chain, as known in the art, includes scanning receiver front-end circuitry 106 (effectively providing reception, filtering and intermediate or base-band frequency conversion). The scanning front-end circuit 106 is serially coupled to a signal processing function 108. An output from the signal processing function 108 is provided to a suitable output device 110, which in accordance with the preferred embodiment of the present invention is a radio frequency interface port for transmitting short-range signals to an associated wireless headset. The radio frequency interface port 110 preferably includes a port driver 111.

[0021] In the preferred embodiment of the present invention, the scanning front-end circuit 106 and the signal processing function 108 have been adapted to distinguish between communication on the subscriber unit's usual wireless communication system, and a communication with a proximal communication unit/wireless headset on a short-range radio frequency (RF) link. Such a communication is described in greater detail with respect to FIG. 2.

[0022] The receiver chain also includes received signal strength indicator (RSSI) circuitry 112, which in turn is coupled to a controller 114 where the RSSI circuitry provides useful quality indicators on the received signal and the controller maintains overall subscriber unit control. The controller 114 is also coupled to the scanning receiver front-end circuitry 106 and the signal processing function 108 (generally realized by a digital signal processor (DSP)) for receiving a transmitted audio, video or image signal.

[0023] The controller 114 may therefore receive signal level information, bit error rate (BER) or frame erasure rate (FER) data from recovered information. The controller is also coupled to a memory device 116 that stores operating regimes, such as decoding/encoding functions and the like. In accordance with the preferred embodiment of the present invention, a proximity detector has been incorporated, operably coupled to the processor 108 and/or controller 114, to detect when a wireless headset has moved into the spatial vicinity of the headset associated with the subscriber unit 100.

[0024] Upon detecting the spatial proximity of a second subscriber unit or its associated headset, the primary subscriber unit 100 or its associated headset is provided with an opportunity to communicate directly with the second subscriber unit or its associated headset using a short range RF link. In this manner, the short-range communication link is used to supplement the standard communication of the subscriber unit, whilst minimizing the impact on the usual communication resource and any generated interference.

[0025] A timer 118 is operably coupled to the controller 114 to control the timing of operations (including transmission or reception of time-dependent signals) within the cellular subscriber unit 100. The timer, together with the port driver 111, processor 108 and/or controller 114, has also been adapted to control the switching of communications from a usual communication link, for example a GSM or 3<sup>rd</sup> generation cellular (3G) communication link to a more appropriate short range RF link.

[0026] The wireless headset 130 associated with the subscriber unit 100 is preferably comprised of:

[0027] (i) One (monaural) or two (bi-aural) earpieces 132;

[0028] (ii) A microphone 134;

[0029] (iii) RF transmit and receive elements 136 and a controller for wireless (e.g. bluetooth) headsets; and, in some cases:

[0030] (iv) A remote answer switch/button (not shown); and

[0031] (v) A second noise cancellation button (not shown).

[0032] As indicated, each wireless headset comprises RF transmitting and receiving elements, allowing two-way communications to at least one other device. Furthermore, in an alternative embodiment of the present invention, the wireless headset includes a detector, in a similar manner to that described earlier with respect to the subscriber unit. Each wireless headset comprises a microprocessor to control communication etc, as well as memory for storing application software etc. In accordance with the preferred embodiment of the present invention, a wireless headset(s) has been adapted with regard to the detection of signals destined for that headset, and how such received signals are controlled, for example via the man machine interface (MMI) of the cellular phone or computer.

[0033] The preferred operation is now described in greater detail with reference to FIG. 2, where an example of a wireless communication arrangement 200 is illustrated, in accordance with a preferred embodiment of the present invention. The arrangement 200 comprises a first communication device, which for the illustrated embodiment is in the form of a subscriber unit 210, and an associated wireless headset 212. The subscriber unit 210 and the wireless headset 212 are operably coupled and capable of providing hands-free functionality to a user of the subscriber unit 210.

[0034] FIG. 2 further illustrates a second communication device 220, which for the illustrated embodiment is in the form of a second subscriber unit 220, and a second associated wireless headset 222. The second subscriber unit 220 and second wireless headset 222 are also capable of providing hands-free functionality to a user of the second subscriber unit 220.

[0035] In particular, according to the present invention, the first subscriber unit 210 (or associated wireless headset 212) has been adapted to include a headset detector, as described with regard to FIG. 1, capable of detecting the presence of the second wireless headset 222, when the second wireless headset 222 (or the second subscriber unit 220) is spatially near the first communication device 210. In the context of the preferred embodiment of the present invention, it is envisaged that the detector recognizes, for example, when the second wireless headset 222 is within, say, ten meters of the first communication unit 210 or its associated wireless headset 212.

[0036] In the alternative preferred embodiment, where the wireless headset 212 is provided with a RF detector that is capable of detecting the presence of the second wireless headset 222, it is envisaged that the first wireless headset 212 informs its associated subscriber unit 210 of the proximal wireless headset(s) or subscriber unit(s).

[0037] When the second wireless headset 222 is detected as being within range 135 of the first subscriber unit 210 (or first wireless headset 212), a user of the first subscriber unit 210 may initiate wireless communication between the first

# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

## LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

## FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.