

US010512027B2

## (12) United States Patent Fan et al.

#### (54) ON-DEMAND REQUEST FOR SYSTEM INFORMATION

- (71) Applicant: Telefonaktiebolaget LM Ericsson (publ), Stockholm (SE)
- (72) Inventors: Rui Fan, Beijing (CN); Jinhua Liu, Beijing (CN); Pål Frenger, Linköping (SE)
- (73) Assignee: Telefonaktiebolaget LM Ericsson (publ), Stockholm (SE)
- (\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 55 days.
- (21) Appl. No.: 15/568,431
- (22) PCT Filed: Sep. 13, 2017
- (86) PCT No.: PCT/CN2017/101576
  § 371 (c)(1),
  (2) Date: Oct. 20, 2017
- (87) PCT Pub. No.: WO2018/126731PCT Pub. Date: Jul. 12, 2018

#### (65) **Prior Publication Data**

US 2018/0302841 A1 Oct. 18, 2018

#### (30) Foreign Application Priority Data

Jan. 4, 2017 (WO) ..... PCT/CN2017/070130

(51) Int. Cl.

DOCKE

| H04W 48/08 | (2009.01) |
|------------|-----------|
| H04W 72/04 | (2009.01) |
| H04W 48/14 | (2009.01) |

# (10) Patent No.: US 10,512,027 B2 (45) Date of Patent: Dec. 17, 2019

(58) Field of Classification Search CPC .. H04W 48/08; H04W 48/14; H04W 72/0446 See application file for complete search history.

#### (56) References Cited

U.S. PATENT DOCUMENTS

| 2012/0106516 A1<br>2015/0351011 A1* |        | Jung et al.<br>Shukla H04W 48/16 |
|-------------------------------------|--------|----------------------------------|
| 2018/0167918 A1*                    | 6/2018 | 455/434<br>Ishii H04W 72/042     |

FOREIGN PATENT DOCUMENTS

| CN | 101123818 A | 2/2008 |  |
|----|-------------|--------|--|
| CN | 101217689 A | 7/2008 |  |
|    | (Continued) |        |  |

#### OTHER PUBLICATIONS

Samsung, R2-167563, 'On Demand SI Delivery: Signaling Aspects', 3GPP TSG-RAN WG2 #96, Nov. 14-18, 2016, pp. 1-3. (Year: 2016).\*

(Continued)


Primary Examiner — Melvin C Marcelo

(74) Attorney, Agent, or Firm - NDWE LLP

#### (57) ABSTRACT

A method for requesting system information. The method comprises transmitting a request for at least one system information block group, each of which comprises one or more system information blocks, from a user terminal to a network node. The one or more system information blocks is/are grouped according to a feature of the one or more system information blocks. The method may further comprise receiving one or more system information block groups from the network node. The one or more system information block groups may comprise the at least one system information block group.

#### 21 Claims, 2 Drawing Sheets



Find authenticated court documents without watermarks at docketalarm.com.

#### US 10,512,027 B2

Page 2

#### (56) References Cited

#### FOREIGN PATENT DOCUMENTS

| CN | 101542915 A | 9/2009  |
|----|-------------|---------|
| EP | 2903349 A1  | 8/2015  |
| EP | 3413632 A1  | 12/2018 |
| EP | 3454620 A1  | 3/2019  |
| GB | 2506389 A   | 4/2014  |

#### OTHER PUBLICATIONS

Examination Report from foreign counterpart Bangladesh Patent Application No. 256/2017/4370, dated Dec. 24, 2018, 1 page.

3GPP TS 25.331 V13.5.0 (Dec. 2016), "3rd Generation Partnership Project; Technical Specification Group Radio Access Network; Radio Resource Control (RRC); Protocol specification (Release 13)," Dec. 2016, 2271 pages.

International Search Report and Written Opinion for Application No. PCT/CN2017/101576, dated Nov. 30, 2017, 11 pages.

Extended European Search Report for Application No. 17784155.8, dated Apr. 11, 2019, 7 pages.

Communication pursuant to Article 94(3) EPC received for European Patent Application No. 17784155.8, dated Jul. 22, 2019, 4 pages.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/CN2017/101576, dated Jul. 18, 2019, 6 pages.

Preliminary Search Report received for Moroccan Patent Application No. 46151, completed on Oct. 2, 2019, 4 pages of Original Document Only.

\* cited by examiner

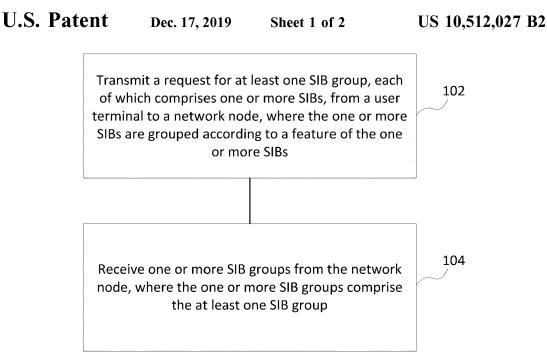


Fig.1

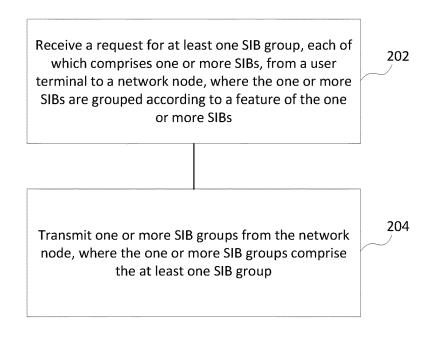



Fig.2

DOCKE.


Δ

RM


Δ





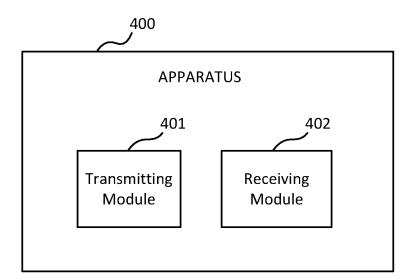





#### ON-DEMAND REQUEST FOR SYSTEM INFORMATION

#### CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a National stage of International Application No. PCT/CN2017/101576, filed Sep. 13, 2017, which claims priority to International Application No. PCT/ CN2017/070130, filed Jan. 4, 2017, which are hereby incorporated by reference.

#### FIELD OF THE INVENTION

The present disclosure generally relates to communications, and more specifically, relates to wireless communications.

#### BACKGROUND

In a communication network such as Long Term Evolution (LTE) system, system information (SI) is important as it can provide necessary information to a user terminal, such as a user equipment (UE) or a wireless device, for linking 25 with the communication network. In new radio (NR), SI may be classified into minimum SI and other SI. Minimum SI is the SI that a user terminal must read before it can know how to access the network. Other SI is the SI not within minimum SI. SI may be transmitted to the user terminal in 30 a master information block (MIB) and/or a system information block (SIB). For example, minimum SI may correspond to MIB, SIB1 and SIB2 in LTE. Other SI may correspond to those remaining SIBs. Since other SI is not necessary for a user terminal to access network, in order to achieve energy 35 efficiency, it may be desirable that the SI may be requested on demand.

#### SUMMARY

This summary is provided to introduce a selection of concepts in a simplified form that are further described below in detailed description. This summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used to limit the scope 45 of the claimed subject matter.

The present disclosure proposes a solution of on-demand request for SI, which may enable a communication network to transmit or broadcast SI, such as other SI as mentioned previously, according to a request for the SI from a user 50 terminal.

According to a first aspect of the present disclosure, there is provided a method for requesting SI, which may be performed at an apparatus such as a user terminal. The method may comprise transmitting a request for at least one SIB group, each of which comprises one or more SIBs, from a user terminal to a network node. The one or more SIBs may be grouped according to a feature of the one or more SIBs. The method may further comprise receiving one or more SIB groups from the network node. The one or more SIB groups may comprise the at least one SIB group.

In an exemplary embodiment, the method according to the first aspect of the present disclosure may further comprise receiving notification information from the network node. For example, transmission of the at least one SIB group may be predefined or derived based at least partly on the notification information.

DOCKE

In an exemplary embodiment, the method according to the first aspect of the present disclosure may further comprise receiving an indicator from the network node. The indicator may indicate at least one of: which SIB group is being transmitted from the network node, and which SIB group is scheduled to be transmitted from the network node.

According to a second aspect of the present disclosure, there is provided an apparatus for requesting SI. The apparatus may comprise at least one processor and at least one memory comprising computer program code. The at least one memory and the computer program code may be configured to, with the at least one processor, cause the apparatus at least to perform any step of the method according to the first aspect of the present disclosure.

15 According to a third aspect of the present disclosure, there is provided a computer program product comprising a computer-readable medium bearing computer program codes embodied therein for use with a computer. The computer program codes may comprise code for performing 20 any step of the method according to the first aspect of the present disclosure.

According to a fourth aspect of the present disclosure, there is provided an apparatus for requesting SI. The apparatus may comprise a transmitting module and a receiving module. In accordance with some exemplary embodiments, the transmitting module may be operable to carry out at least the transmitting step of the method according to the first aspect of the present disclosure. The receiving module may be operable to carry out at least the receiving step of the method according to the first aspect of the present disclosure.

In accordance with an exemplary embodiment, the transmission of the request may comprise transmitting a preamble for indicating the at least one SIB group.

In accordance with an exemplary embodiment, the transmission of the request may comprise: selecting, from a plurality of preambles, a preamble associated with the at least one SIB group; and transmitting the request to the network node. The request may include the selected preamble.

In accordance with an exemplary embodiment, the at least one SIB group may be indicated by transmission timing of the preamble.

In accordance with an exemplary embodiment, the transmission of the request may comprise transmitting the request to the network node in accordance with a selected transmission timing associated with the at least one SIB group.

According to a fifth aspect of the present disclosure, there is provided a method for transmission of SI, which may be performed at an apparatus such as a network node. The method may comprise receiving a request for at least one SIB group, each of which comprises one or more SIBs, from a user terminal to a network node. The one or more SIBs may be grouped according to a feature of the one or more SIBs. The method may further comprise transmitting one or more SIB groups from the network node. The one or more SIB groups may comprise the at least one SIB group.

In accordance with an exemplary embodiment, the method according to the fifth aspect of the present disclosure may further comprise: transmitting notification information to the user terminal. For example, transmission of the at least one SIB group may be predefined or derived based at least partly on the notification information.

In accordance with an exemplary embodiment, the method according to the fifth aspect of the present disclosure may further comprise transmitting an indicator from the network node. The indicator may indicate at least one of:

Find authenticated court documents without watermarks at docketalarm.com

# DOCKET A L A R M



# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

# **Real-Time Litigation Alerts**



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## **Advanced Docket Research**



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

# **Analytics At Your Fingertips**



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

## LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

## FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.