



LTE

LTE (both radio and core network evolution) is now on the market. Release 8 was frozen in December 2008 and this has been the basis for the first wave of LTE equipment. LTE specifications are very stable, with the added benefit of enhancements having been introduced in all subsequent 3GPP Releases.

The motivation for LTE

- Need to ensure the continuity of competitiveness of the 3G system for the future
- User demand for higher data rates and quality of service
- Packet Switch optimised system
- Continued demand for cost reduction (CAPEX and OPEX)
- Low complexity
- Avoid unnecessary fragmentation of technologies for paired and unpaired band operation



LTE Overview

Author: Magdalena Nohrborg, for 3GPP

LTE (Long Term Evolution) or the E-UTRAN (Evolved Universal Terrestrial Access Network), introduced in 3GPP R8, is the access part of the Evolved Packet System (EPS). The main requirements for the new access network are high spectral efficiency, high peak data rates, short round trip time as well as flexibility in frequency and bandwidth.

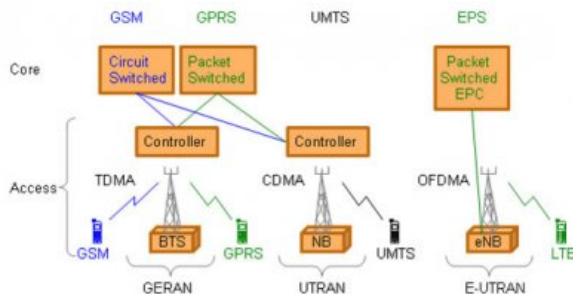


Figure 1 Network Solutions from GSM to LTE


GSM was developed to carry real time services, in a circuit switched manner (blue in figure 1), with data services only possible over a circuit switched modem connection, with very low data rates. The first step towards an IP based packet switched (green in figure 1) solution was taken with the evolution of GSM to GPRS, using the same air interface and access method, TDMA (Time Division Multiple Access).

To reach higher data rates in UMTS (Universal Mobile Terrestrial System) a new access technology WCDMA (Wideband Code Division Multiple Access) was developed. The access network in UMTS emulates a circuit switched connection for real time services and a packet switched connection for datacom services (black in figure 1). In UMTS the IP address is allocated to the UE when a datacom service is established and released when the service is released. Incoming datacom services are therefore still relying upon the circuit switched core for paging.

The Evolved Packet System (EPS) is purely IP based. Both real time services and datacom services will be carried by the IP protocol. The IP address is allocated when the mobile is switched on and released when switched off.

The new access solution, LTE, is based on OFDMA (Orthogonal Frequency Division Multiple Access) and in combination with

Search

3GPP Website: Search for... 

Search and download specs, docs, CRs and more from the 3GPP FTP Server:

 **ADVANCED FTP SEARCH**

More News:

- [Advanced plans for 5G - Results of the RAN workshop on Rel-18](#)
- [Release 17 Schedule](#)
- [3GPP meets IMT-2020](#)
- [Recorded 3GPP webinars and interviews \(no registration needed\)](#)
- [Subscribe to our Newsletter 'Highlights'](#)

News Feeds

3GPP tweets

the downlink, using spatial multiplexing, the rate can be as high as 300 Mbps.

The LTE access network is simply a network of base stations, evolved NodeB (eNB), generating a flat architecture (figure 2). There is no centralized intelligent controller, and the eNBs are normally inter-connected via the X2-interface and towards the core network by the S1-interface (figure 2). The reason for distributing the intelligence amongst the base-stations in LTE is to speed up the connection set-up and reduce the time required for a handover. For an end-user the connection set-up time for a real time data session is in many cases crucial, especially in on-line gaming. The time for a handover is essential for real-time services where end-users tend to end calls if the handover takes too long.

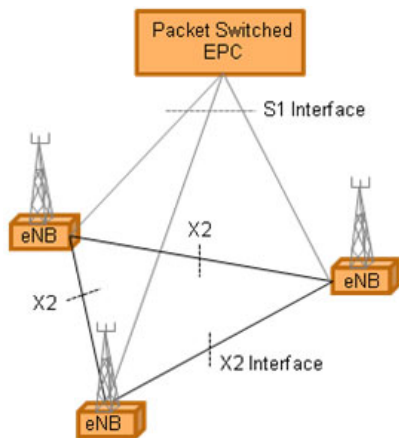


Figure 2. X2 and S1 Interfaces


Another advantage with the distributed solution is that the MAC protocol layer, which is responsible for scheduling, is represented only in the UE and in the base station leading to fast communication and decisions between the eNB and the UE. In UMTS the MAC protocol, and scheduling, is located in the controller and when HSDPA was introduced an additional MAC sub-layer, responsible for HSPA scheduling was added in the NB.

The scheduler is a key component for the achievement of a fast adjusted and efficiently utilized radio resource. The Transmission Time Interval (TTI) is set to only 1 ms.

During each TTI the eNB scheduler shall:

- consider the physical radio environment per UE. The UEs report their perceived radio quality, as an input to the scheduler to decide which Modulation and Coding scheme to use. The solution relies on rapid adaptation to channel variations, employing HARQ (Hybrid Automatic Repeat Request) with soft-combining and rate adaptation.
- prioritize the QoS service requirements amongst the UEs. LTE supports both delay sensitive real-time services as well as datacom services requiring high data peak rates.
- inform the UEs of allocated radio resources. The eNB schedules the UEs both on the downlink and on the uplink. For each UE scheduled in a TTI the user data will be carried in a Transport Block (TB). DL there can be a maximum of two TBs generated per TTI per UE – if spatial multiplexing is used. The TB is delivered on a transport channel. In LTE the number of channels is decreased compare to UMTS. For the user plane there is only one shared transport channel in each direction. The TB sent on the channel, can therefore contain bits from a number of services, multiplexed together.


To achieve high radio spectral efficiency as well as enable efficient scheduling in both time and frequency domain, a multicarrier approach for multiple access was chosen by 3GPP. For the downlink, OFDMA (Orthogonal Frequency Division Multiple Access) was selected and for the uplink SC-FDMA (Single Carrier - Frequency Division Multiple Access) also known as DFT (Discrete Fourier Transform) spread OFDMA (figure 3).

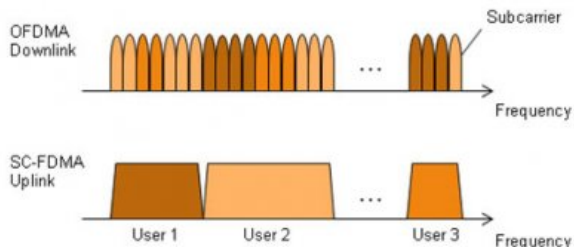

OFDM is a multicarrier technology subdividing the available bandwidth into a multitude of mutual orthogonal narrowband subcarriers. In OFDMA these subcarriers can be shared between multiple users. The OFDMA solution leads to high Peak-to-Average Power Ratio (PAPR) requiring expensive power amplifiers with high requirements on linearity, increasing the power consumption for the sender. This is no problem in the eNB, but would lead to very expensive handsets. Hence a different solution was selected for the UL. As illustrated in figure 3, the SC-FDMA solution generates a signal with single carrier characteristics, hence with a low PAPR.

To enable possible deployment around the world, supporting as many regulatory requirements as possible, LTE is developed for a number of frequency bands – E-UTRA operating bands- currently ranging from 700 MHz up to 2.7GHz. The available bandwidths are also flexible starting with 1.4 MHz up to 20 MHz. LTE is developed to support both the time division duplex technology (TDD) as well as frequency division duplex (FDD). In R8 there are 15 bands specified for FDD and eight bands for TDD. In R9 four bands were added for FDD. Also added in R9 were for example Multimedia Broadcast Multicast Service (MBMS), and Home eNB (HeNB), see figure 4. MBMS is used to provide broadcast information to all users, for example advertisement, and multicast to a closed group subscribing to a specific service, e.g. streaming TV. HeNBs are introduced mainly to provide coverage indoors, in homes or offices. The HeNB is a low power eNB that will be used in small cells – femto cells. Normally it will be owned by the customer, deployed without any network planning and connected to the operators EPC (Evolved Packet Core).

a) Multimedia Broadcast Multicast Service (MBMS)

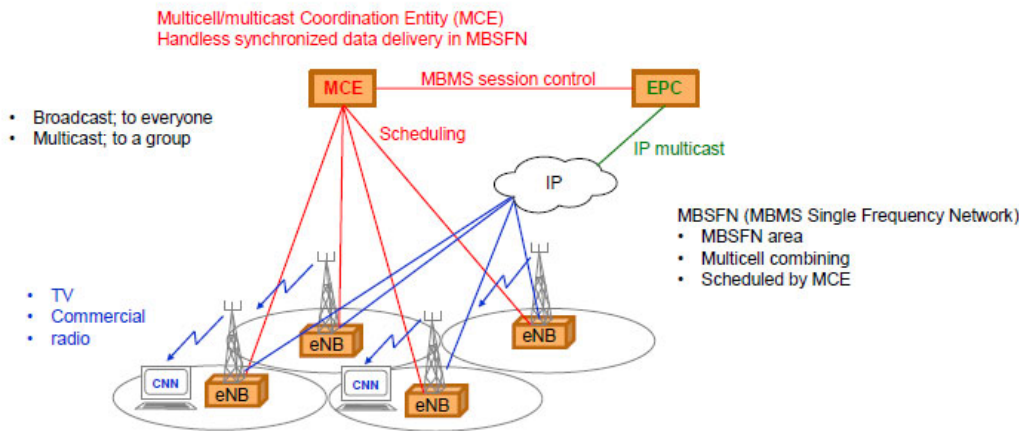

b) Home eNB (HeNB)

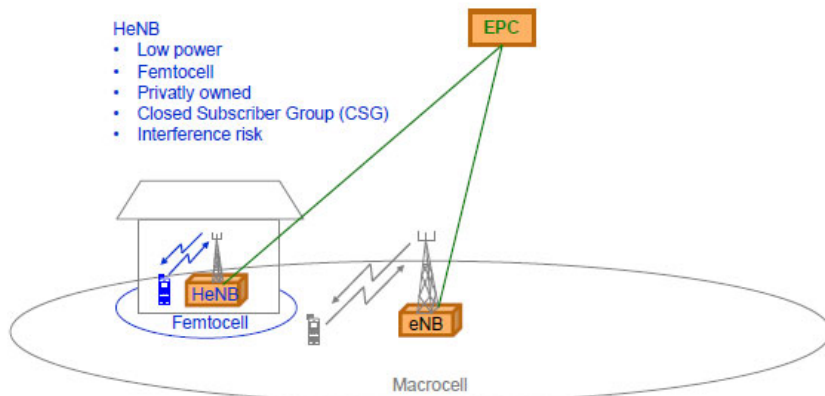


Figure 4 New in LTE R9: a) MBMS, b) HeNB.

Further reading

- TS 36.211 Evolved Universal Terrestrial Radio Access (E-UTRA); Physical channels and modulation
- TS 36.212 Evolved Universal Terrestrial Radio Access (E-UTRA); Multiplexing and channel coding
- TS 36.213 Evolved Universal Terrestrial Radio Access (E-UTRA); Physical layer procedures
- TS 36.300 Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Universal Terrestrial Radio Access Network (E-UTRAN); Overall description; Stage 2
- TS 36.321 Evolved Universal Terrestrial Radio Access (E-UTRA); Medium Access Control (MAC) protocol specification
- TS 36.331 Evolved Universal Terrestrial Radio Access (E-UTRA); Radio Resource Control (RRC); Protocol specification
- TS 36.413 Evolved Universal Terrestrial Radio Access Network (E-UTRAN); S1 Application Protocol (S1AP)
- TS 36.423 Evolved Universal Terrestrial Radio Access Network (E-UTRAN); X2 Application Protocol (X2AP)

LTE Historical Information

The technical paper [UTRA-UTRAN Long Term Evolution \(LTE\) and 3GPP System Architecture Evolution \(SAE\)](#) is a good starting point.

Initiated in 2004, the Long Term Evolution (LTE) project focused on enhancing the Universal Terrestrial Radio Access (UTRA) and optimizing 3GPP's radio access architecture.

The 3GPP [36 series](#) of specifications, covers the "Evolved Universal Terrestrial Radio Access (E-UTRA)".

See also - the technologies page on [LTE-Advanced](#), which describes the work beyond LTE Release 8/9.

...Get details of how to use the [LTE](#) and [LTE-Advanced](#) logos

ABOUT RELEASES

[Release 18](#)
[Release 17](#)
[Release 16](#)
[Release 15](#)
[Release 14](#)
[Release 13](#)
[Release 12](#)
[Release 11](#)
[Release 10](#)
[Release 9](#)
[Release 8](#)
[Release 7](#)
[Release 6](#)
[Release 5](#)
[Release 4](#)
[Release 1999](#)

FULL MEETING CALENDAR

Face to face meetings have been suspended for the time being.
The calendar of replacement e-meetings is online at
<https://portal.3gpp.org/>

BROWSE KEYWORDS & TECH.

[5G NR \(Rel-15\)](#)
[Common API Framework \(CAPIF\)](#)
[Carrier Aggregation Explained](#)
[Coordinated Vulnerability Disclosure \(CVD\)](#)
[Control and User Plane Separation of EPC nodes \(CUPS\)](#)
[DSS - Dynamic spectrum sharing](#)
[HSPA](#)
[LTE-Advanced](#)
[LTE](#)
[UAS - UAV](#)
[V2X](#)
[...more keywords](#)

©3GPP 2021