




 **EUROPEAN PATENT APPLICATION**

 Application number: **94308827.8**


 Int. Cl.⁶: **H04Q 7/32, H04M 1/72**

 Date of filing: **30.11.94**


 Priority: **22.12.93 GB 9326189**

 Inventor: **Byrne, John Daniel**
3 Durrell Way
Shepperton,
Middlesex, TW17 8HR (GB)


 Date of publication of application:
28.06.95 Bulletin 95/26

 Designated Contracting States:
DE FR GB IT SE

 Representative: **Frain, Timothy John**
Patent Department
Nokia Mobile Phones
St Georges Court
St Georges Road
Camberley, Surrey GU15 3OZ (GB)

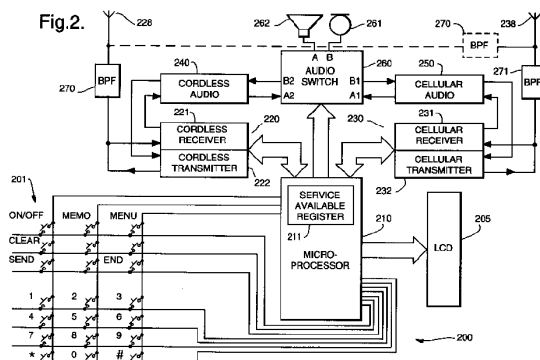
 Applicant: **NOKIA MOBILE PHONES LTD.**
P.O. Box 86
SF-24101 Salo (FI)

 **Multi-mode radio telephone.**

 A radio telephone capable of being operated in more than one radio telephone system, comprising communication means respectively associated with each of the more than one radio telephone system, monitoring means for monitoring signals of the more than one radio telephone system, and selection means responsive to said monitoring means for automatically selecting and re-selecting respective said communication means in accordance with the signals of one of the more than one radio telephone system fulfilling at least one predetermined criterion. The predetermined criterion can be based on a number of features such as received signal strength, access rights, system requests, least BER or frame

error rate and user velocity. The radio telephone can be used in a radio telephone system adapted to cooperate with at least one other radio telephone system, comprising user information exchange means respectively associated with each of the at least one other radio telephone system for exchanging user information signals between the radio telephone system and the at least one other radio telephone system, monitoring means for monitoring user information signals of the radio telephone systems and selection means for automatically assigning and re-assigning a user to one of the radio telephone systems in accordance with the user control signals fulfilling at least one predetermined criterion.

EP 0 660 626 A2



The present invention relates to a radio telephone, and in particular to a radio telephone operable for more than one system.

Over the last ten years there has been a rapid growth in the use and availability of radio telephone systems. As part of this growth there has been a proliferation of different types of radio telephone system, offering the user a variety of services, geographical coverage and cost. Many of these different radio telephone systems cover the same, or a part of the same, geographical area as each other.

Typically, different radio systems operate on different radio frequencies, utilise different modulation techniques, signaling techniques and intra-system protocols etc. to each other. Thus, a radio telephone designed for one system is generally unable to be used on another system. Thus if a user wishes to have access to more than one system it is necessary to have either more than one radio telephone or a radio telephone capable of operating in more than one system. Having more than one radio telephone is inconvenient for the user. Known radio telephones capable of operating in more than one system typically consist of little more than 2 separate phones combined in a signal housing. The preference for operating in a particular system is user defined as disclosed in US patent number 4 989 230.

A particularly useful and appropriate environment for multi-mode radio telephones is the recently available cellular and cordless telephone systems. In the prior art, cordless telephones are typically used in the home and office to allow the user to place and receive calls at any point throughout the house via an RF link with a home base station located within the house or office. Such cordless telephones are connected via the home base station to the user's telephone landline which in turn is connected to the Public Switched Telephone Network (PSTN). Further, there are known second generation cordless telephone systems such as CT-2 or DECT which are digital systems. Such CT-2 or DECT systems extend beyond conventional domestic operation of cordless telephones by allowing the user to establish an RF link between a CT-2 or DECT radio telephone and a base station in a more publicly accessible location e.g. outside of the user's home, a railway station, shopping mall or airport. Such base stations are known as telepoint base stations and are linked to the PSTN in much the same way as a home base station. Some cordless, and in particular DECT radio telephones, are now able to receive calls via telepoint base stations whereas hitherto they were only able to place them. A description of such a system can be found in PCT international patent application WO 92/03006. Thus, placing and

receiving calls whilst geographically roaming is possible in cordless telephone systems.

However, cordless telephone systems are low power systems and each base station provides telecommunications within only approximately a 150 metre radius of the base station, dependent upon the terrain and any man-made objects which could interfere with signalling between a cordless telephone and the base station. Such systems are generally only used in areas of high user density and thus tend to be limited to urban areas. This clearly restricts the geographical mobility of a CT-2, DECT or the like cordless telephone user.

In the prior art there are known so called cellular radio telephone systems having base stations which cover a wide geographical area (cell), eg 35 km diameter. However, in urban areas where the user density is high the cells are much smaller and operate at lower powers to facilitate frequency re-use thereby increasing the communication channel density.

Cellular systems have advantages over cordless systems since they allow a user to place and receive calls over a large area. Additionally they are suitable for use in moving vehicles. This is because cellular telephone systems have sophisticated handover procedures to facilitate switching between cells as a user's vehicle crosses from one cell to another. Furthermore, the cells are larger than in cordless systems and thus handovers occur less often, even if travelling in a vehicle. This ensures continuity of service and is particularly important during a call. However, the cost of a cellular telephone call is significantly greater than the cost of a cordless telephone call, since cordless telephone calls are made by way of the user's land line PSTN link and cost the same as landline calls, whilst cellular telephone calls are made by way of expensive cellular base stations and cellular switching equipment and cost much more than land line telephone calls.

In order for a user to be able to utilise both cellular and cordless telephone systems via a single radio telephone handset a so-called cellular cordless telephone (CCT) has been proposed in US patent US 4 989 230. Both the cellular system and the cordless system are monitored by the CCT for incoming calls and the CCT automatically enters a user defined preferred mode for answering an incoming call if the system corresponding to that mode is available. When placing a call the user initiates the call as either cellular or cordless and the CCT connects the call appropriately. In order for the user to be able to make a choice the available systems can be displayed on the CCT. When using the CCT, the user has to make the decision as to which telephone system is used. Furthermore, the prior art CCT disclosed in US 4

989 230 requires the user to select transfer of a cordless call to the cellular system should the cordless signals deteriorate (eg the user moves out of range of a cordless base station or the user's velocity increases). Additionally, optimisation of the available systems is likely not to be achieved if the user is left to decide which system is to be used. One of the disadvantages of the CCT disclosed in US 4 989 230 is that a user might not know if a signal is deteriorating until it is too late and the ongoing call is lost. For example, a visual indication of poor signal shown on the CCT is likely to be missed by a user, since in use the CCT will be placed at the side of the user's head and thus visual indications would not be visible to the user. Other indications such as an audible tone or alarm would interfere with the user's ongoing call, and would be annoying and irritating to the user.

A first aspect of the present invention provides a radio telephone operable in more than one radio telephone system, comprising communication means respectively associated with each of the more than one radio telephone system, monitoring means for monitoring signals of the more than one radio telephone system, and selection means responsive to said monitoring means for automatically selecting and re-selecting respective said communication means in accordance with the signals of one of the more than one radio telephone system fulfilling at least one predetermined criterion, and a second aspect of the invention provides a method for operating a radio telephone in more than one radio telephone system, comprising, monitoring signals of the more than one radio telephone system determining whether the signals of the more than one radio telephone system fulfil at least one predetermined criterion, and automatically selecting and re-selecting for which of the more than one radio telephone system the radio telephone is operable in accordance with the signals fulfilling the at least one predetermined criterion.

These have the advantage that the radio telephone is not only operable for more than one radio telephone system, but that it is able to automatically select and re-select which of the available radio systems to use. The selection can be based on any predetermined criterion or combination of criteria. For example, the radio telephone can be set to operate on the cheapest system available (e.g. cordless system). Such criteria are likely to be factory set, but optionally could be user programmable. A further advantage is that the radio telephone user can know of incoming calls on systems other than the one for which the radio telephone is presently operable, and can manually switch to operate in the appropriate system thereby overriding the automatic selection. Of course, if the radio

telephone is already in a call then an indication that there is an incoming call can be made to the user (eg call waiting indication). Such a system would be of particular benefit if incoming calls from systems other than the one in which the radio telephone is currently operable were not forwarded to that system. An additional advantage is that automatic inter system handover would be possible, based on the predetermined criterion. For example, if the user were travelling out of a system service area and the service breaks down, a radio telephone operable in accordance with the present invention may automatically handover to a system having a good service (e.g. cordless to cellular). Similarly, if a user was engaged in a call on a high cost system and a low cost system became available such a radio telephone may automatically handover the call to the low cost system. Examples of inter-system handover are disclosed in co-pending British Patent Applications No. 9320814.8, No. 9320815.8 and No. 9326169.1.

In a preferred embodiment of the first and second aspects of the invention there is provided a visual indication of the one of the more than one radio telephone system. This has the advantage that the user is informed of what radio systems are available. Thus, if the only radio systems available are ones which the user does not wish to use, the radio telephone can be turned off. This would avoid the problem of receiving calls on particularly expensive radio systems, if these radio systems were the only ones available.

Preferably, at least one predetermined criterion is a user indicated preference for one of said more than one radio telephone system. This has the advantage that the user can pre-programme the radio telephone to select certain types of radio system, eg the cheapest available. Alternatively, the user indicated preference could be a manually indicated preference during operation of the radio telephone. Such a manually indicated preference could override any predetermined criteria and would give the user instantaneous control over which system the radio telephone is operable in at a given moment of time.

Suitably, at least one predetermined criterion can be one or a combination of the following requirements that the selected radio system is one for which:

- i) the received signal strength at the radio telephone is greatest;
- ii) the radio telephone has access rights;
- iii) the selected radio telephone system requests selection;
- iv) the bit error rate, frame error rate or the like is the lowest; and
- v) the user velocity is appropriate.

These have the advantages in that the system for which there is a high probability of successful communication can be selected. Furthermore, the radio telephone can be set to select only those systems for which it has access rights thereby avoiding possible extra high costs for using a service for which no prior access arrangements have been made.

Advantageously, the monitoring means monitors the signals intermittently. Thus, less power is consumed by the radio telephone's monitoring process which results in prolonged battery life. Furthermore, signals required to carry out the monitoring process are used less often which allows more time for the radio telephone to process signals for the currently operating radio system, in particular when a call is in progress. Intermittent monitoring is particularly effective during periods when no calls are in progress.

Typically, the radio system in which the radio telephone is operating will be a TDMA system and it would be advantageous if the monitoring process were carried out during a period of TDMA inactivity (eg unused slots). Thus, there would be none or at least reduced interference with the TDMA system signals. Additionally there is the benefit that the same components may be utilised for more than one terminal mode and so cost/size savings can be made. Both TDMA sharing of receiver functions between the systems and also transmitter functions can be utilised. By sharing transmitter functions, communications with a second system may start before releasing a first system.

In a third aspect of the invention there is provided a radio telephone system adapted to co-operate with at least one other radio telephone system, comprising user information exchange means respectively associated with each of the at least one other radio telephone system for exchanging user information signals between the radio telephone system and the at least one other radio telephone system, monitoring means for monitoring user information signals of the radio telephone systems and selection means for automatically assigning and re-assigning a user to one of the radio telephone systems in accordance with the user control signals fulfilling at least one predetermined criterion, and in a fourth aspect of the invention there is provided a method for operating a radio telephone system adapted to co-operate with at least one other radio telephone system, comprising, exchanging user information respectively associated with each of the at least one other radio telephone system between the radio telephone system and the at least one other radio telephone system, monitoring user information signals exchanged between the radio telephone systems, determining whether the user information sig-

nals fulfil at least one predetermined criterion, and automatically assigning and re-assigning a user to one of the radio telephone systems in accordance with the user information signals fulfilling the at least one predetermined criterion.

These have the advantage that users are automatically assigned or reassigned to radio telephone systems dependent upon certain criteria being fulfilled. These criteria can be set by the radio systems themselves, or can be based on instructions from users. Since the radio telephone system exchanges user information between itself and other radio systems, the assigning and re-assigning of users to particular radio telephone systems can be made easily and quickly.

Additionally, calls from users can be routed through different radio telephone systems based on the predetermined criteria and the user information.

Figure 1 is a block diagram of a cellular cordless telephone system embodying the present invention;

Figure 2 is a block diagram of a cellular cordless telephone embodying the present invention; Figure 3 is a flow diagram showing the operational steps taken under control of the micro-processor to monitor for system availability and connect the CCT to an appropriate system;

Figure 4 is a flow diagram showing the operational steps taken under control of the micro-computer whilst a call is in progress; and

Figure 5 is a block diagram of a combined DECT/GSM network.

Specific embodiments of the invention will now be described, by way of example only, and with reference to the above described drawings.

Figure 1 illustrates a block diagram of a cellular cordless telephone system 100 which embodies the present invention. The system includes a Public Switched Telephone Network (PSTN) 117, connected by landlines to cordless base stations 114, 116 and 118 having respective landline telephone numbers and respectively located in an office building 110, domestic residence 120 or some other geographical location.

Cordless base stations 114, 116 and 118 communicate with the cellular cordless telephone (CCT) 200 via antennas 112, 119 and 122. Antennas 112, 119 and 122 may be implemented as any sort of suitable antenna such as a whip antenna, helical antenna or printed circuit antenna. The cordless base stations 114 and 116 may be a conventional cordless base station. Cordless base station 118 is a community cordless base station and such base stations may be located throughout an urban area, or common user area such as a railway station, shopping mall or airport, for providing a shared telephone service to CCTs 200. In such a case, the cordless base station 118 may include additional

equipment not usually found in conventional cordless base stations for billing calls to a telephone number of CCT 200.

Also connected through telephone landlines to the PSTN 117 is the Mobile Switching Centre (MSC) 138 associated with Base Station Controller(s) (BSC) 136 for controlling Cellular Base Station(s) 130. Cellular base station 130 comprises both a receive antenna 132 and a transmit antenna 134 for communicating with CCTs 200.

The CCT 200 may be a mobile unit installed in a vehicle, a so called transportable unit or a hand held portable unit. CCT 200 comprises an antenna 228 for cordless communication and an antenna 238 for cellular communication. The CCT 200 may alternatively comprise a single antenna 238 for both cellular and cordless communication and arranged as illustrated in figure 2 by the dotted line 272. Typically in the UK cordless telephone systems operate in frequency bands at 49 MHz (CTØ), 860 MHz (CT2) and 1880-1900 MHz (DECT) and cellular telephone systems in frequency bands 890 - 905 MHz and 935 - 950 MHz (TACS), 905-915 MHz and 950-960 MHz (GSM) or 1800 MHz (DCS).

Figure 2 illustrates a detailed block diagram of an embodiment of a CCT 200 in accordance with the present invention. CCT 200 comprises a cellular telephone transceiver 230, and antenna 238, a cordless telephone transceiver 220 and antenna 228, a microprocessor 210, keypad 201, display 205, audio switch 260, microphone 261 and speaker 262. The microphone 261, speaker 262 and keypad 201 may alternatively be located in a handset separate from the rest of the CCT 200. An alternative embodiment is shown by dashed line 272, in which cordless transceiver 220 and cellular transceiver 230 may be coupled to a single antenna 238 by way of band pass filters (BPF) 270 and (BPF) 271, respectively. Cordless telephone transceiver 220 may be any conventional cordless transceiver. However, it would be advantageous if the cordless telephone transceiver 220 conformed to a common air interface for cordless telephones, since this would facilitate roaming of the CCT 200 between different cordless systems. An example of such an interface is the recently introduced common air interface CAI for CT2 cordless systems. The cellular transceiver 230 may likewise be any conventional cellular transceiver. The keypad 201, microprocessor 210, display 205 and the like can be any available type, connected and arranged to operate in the CCT 200. The microprocessor 210 includes a Service Available Register (SAR) 211 for storing which radio systems are currently available to the CCT 200.

The microprocessor 210 illustrated in Figure 2 is adapted to operate in accordance with the flow charts illustrated in Figures 3 - 4, for controlling the

CCT 200 as a cordless telephone, a cellular telephone or a cellular cordless telephone. Thus, in accordance with the present invention the CCT 200 may operate, as far as a user is concerned, simultaneously as a cellular telephone and a cordless telephone. For the sake of explanation and clarity, it should be noted that the CCT 200 can be so arranged such that both cellular and cordless operations are in progress at the same time. Alternatively, if components are shared between cellular and cordless parts, cellular and cordless operations can be performed at different times although this would be done at a speed sufficient for it to be undetectable by the user and therefore appear to be simultaneous operation.

When operating as a cordless telephone control signals from the microprocessor 210 enable cordless receiver 221 and cordless transmitter 222. The microprocessor 210 also monitors signals from the cordless receiver 221 indicating received signal strength and for detecting receive data, and from the cordless transmitter 222 for sending transmit data. Additionally, the microprocessor 210 monitors control signals from the cordless transceiver 220 for detecting incoming calls (ringing), security codes and broadcast information relevant to the cordless system, and for sending dialling information.

The microprocessor 210 controls the CCT 200 in a similar way when operating as a cellular telephone, but appropriately modified for the signalling protocols and data encryption used in the cellular system. The signalling protocols, data encryption techniques and the like used in respective telephone systems are well known in the art, and the microprocessor can be arranged to operate in a known manner to effect control of the signals in such systems.

The audio switch 260 is controlled by the microprocessor 210 to link the cordless audio channel 240 or the cellular audio channel 250 to the microphone 261 and loudspeaker 262 as appropriate.

Referring to Figure 3, there is illustrated a flow diagram showing the steps used by microprocessor 210 for operating the CCT 200 to receive and place cellular or cordless telephone calls. In this example, for simplicity, there is a presumption that a cellular service is generally available when a cordless service is not, and that a cordless service is the preferred service. Entering at block 302, the user activates the CCT 200 and the microprocessor 210 monitors both the cellular and cordless system availability. If the cellular and/or cordless system are available the microprocessor 210 updates the display 205 and SAR 211 at step 304. Next at block 305 a check is made to see if a call is in progress or not. If not, then at block 306, a check

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.