



US006668088B1

(12) **United States Patent**  
Werner et al.

(10) **Patent No.:** US 6,668,088 B1  
(45) **Date of Patent:** Dec. 23, 2003

(54) **DIGITAL SIGNAL COMPRESSION  
ENCODING WITH IMPROVED  
QUANTISATION**

(75) Inventors: **Oliver Hartwig Werner**, South  
Craydon (GB); **Nicholas Dominic  
Wells**, Brighton (GB); **Michael James  
Knee**, Petersfield (GB)

(73) Assignees: **British Broadcasting Corporation**,  
London (GB); **Snell & Wilcox Limited**,  
Middlesex (GB)

(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/380,047**

(22) PCT Filed: **Feb. 25, 1998**

(86) PCT No.: **PCT/GB98/00582**

§ 371 (c)(1),  
(2), (4) Date: **Nov. 29, 1999**

(87) PCT Pub. No.: **WO98/38800**

PCT Pub. Date: **Sep. 3, 1998**

(30) **Foreign Application Priority Data**

Feb. 25, 1997 (GB) ..... 9703831  
Feb. 25, 1997 (GB) ..... 9703834

(51) **Int. Cl.**<sup>7</sup> ..... **G06K 9/36**; G06K 9/46

(52) **U.S. Cl.** ..... **382/239**; 375/240.03; 382/251

(58) **Field of Search** ..... 382/236, 239,  
382/245, 246, 248, 250, 251; 375/240.02-240.07,  
240.18, 240.2, 240.23; 348/404.1, 405.1,  
419.1, 395.1

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,245,427 A \* 9/1993 Kunihiro ..... 348/400.1

5,293,434 A \* 3/1994 Feig et al. .... 382/234  
5,301,242 A \* 4/1994 Gonzales et al. .... 382/239  
5,412,429 A \* 5/1995 Glover ..... 375/240.11  
5,521,643 A \* 5/1996 Yim ..... 348/419  
5,768,436 A \* 6/1998 Keesman ..... 382/248  
5,778,192 A \* 7/1998 Schuster et al. .... 709/247  
5,933,194 A \* 8/1999 Kim et al. .... 348/403.1

**FOREIGN PATENT DOCUMENTS**

DE 35 11 659 10/1986 ..... H03M/7/38  
EP 0 478 230 4/1992 ..... H04N/7/30  
EP 0 509 576 10/1992 ..... H04N/7/133  
EP 0 513 520 11/1992 ..... H04N/7/133  
EP 0 599 258 6/1994 ..... H04N/7/133  
EP 0 705 039 4/1996 ..... H04N/7/30  
EP 0 710 030 5/1996 ..... H04N/7/26  
EP 0 711 079 5/1996 ..... H04N/7/50  
EP 0 720 375 7/1996 ..... H04N/7/26  
EP 0 739 138 10/1996 ..... H04N/7/26  
WO 95 35628 12/1995 ..... H04N/7/26  
WO 96 34496 10/1996 ..... H04N/7/30

\* cited by examiner

*Primary Examiner*—Timothy M. Johnson

(74) *Attorney, Agent, or Firm*—McDermott, Will & Emery

(57) **ABSTRACT**

In compression encoding of a digital signal, such as MPEG2, transform coefficients are quantised with the lower bound of each interval being controlled by a parameter  $\lambda$ . In the MPEG2 reference coder, for example,  $\lambda=0.75$ . Because the quantised coefficients are variable length coded, improved quality or reduced bit rates can be achieved by controlling  $\lambda$  so as to vary dynamically the bound of each interval with respect to the associated representation level. The parameter  $\lambda$  can vary with coefficient amplitude, with frequency, or with quantisation step size. In a transcoding operation,  $\lambda$  can also vary with parameters in the initial coding operation.

**4 Claims, 3 Drawing Sheets**

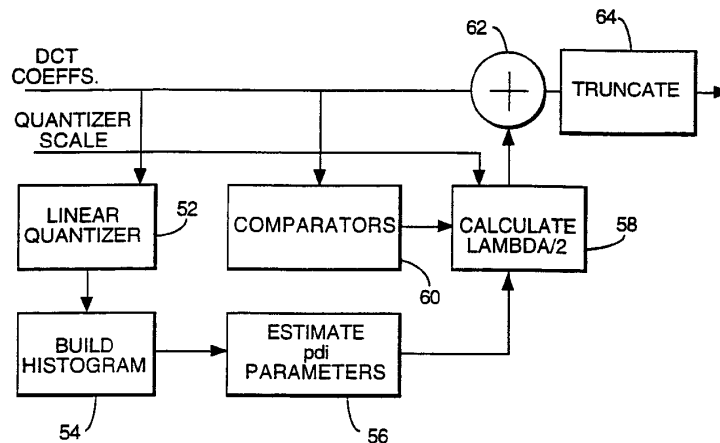


Fig.1.

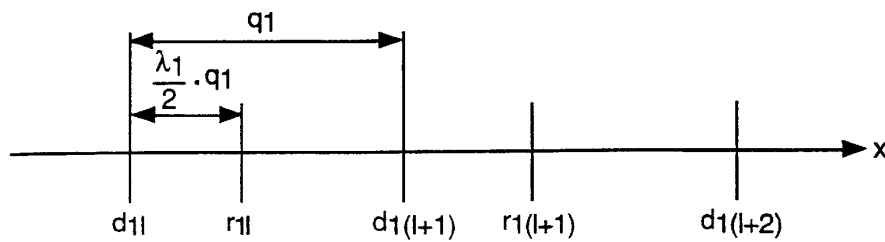


Fig.2.

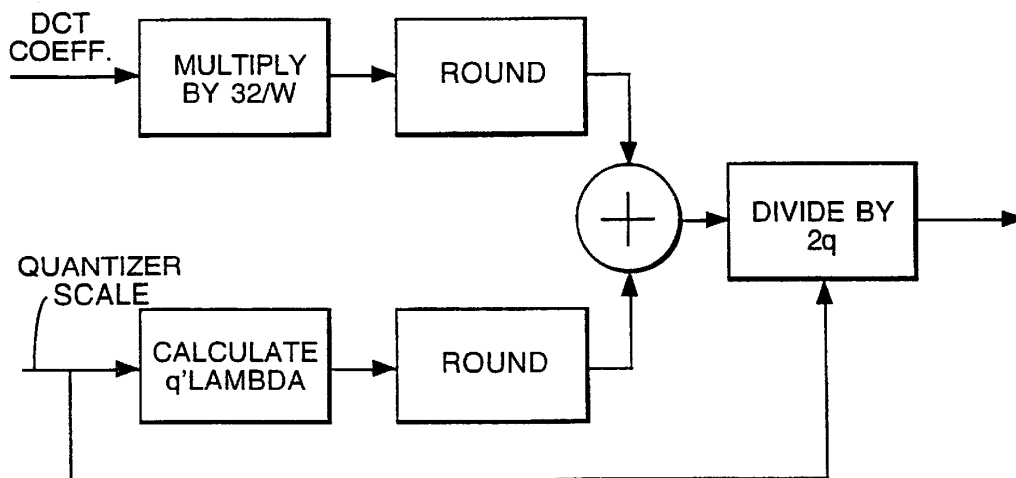


Fig.3.

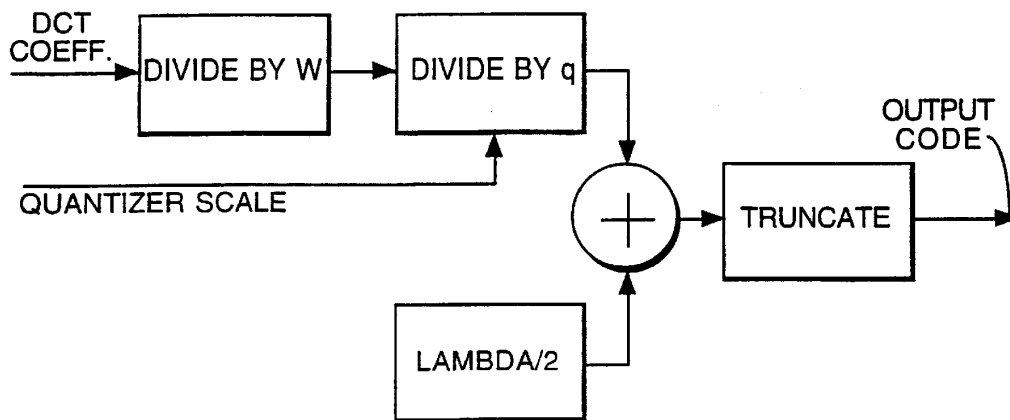


Fig.4.

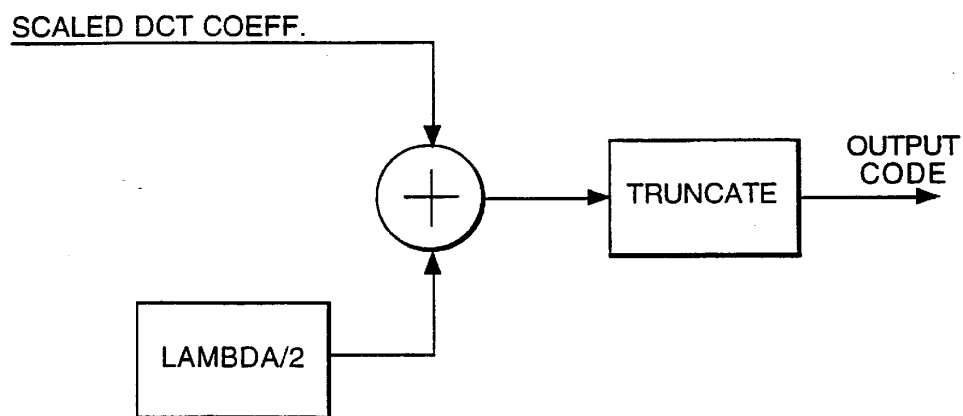


Fig.5.


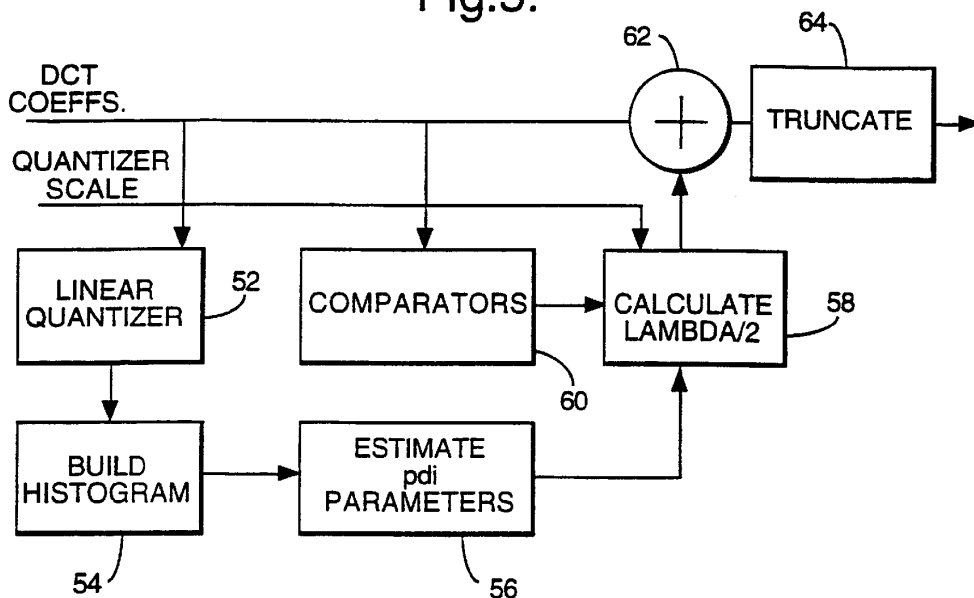


Fig.6.

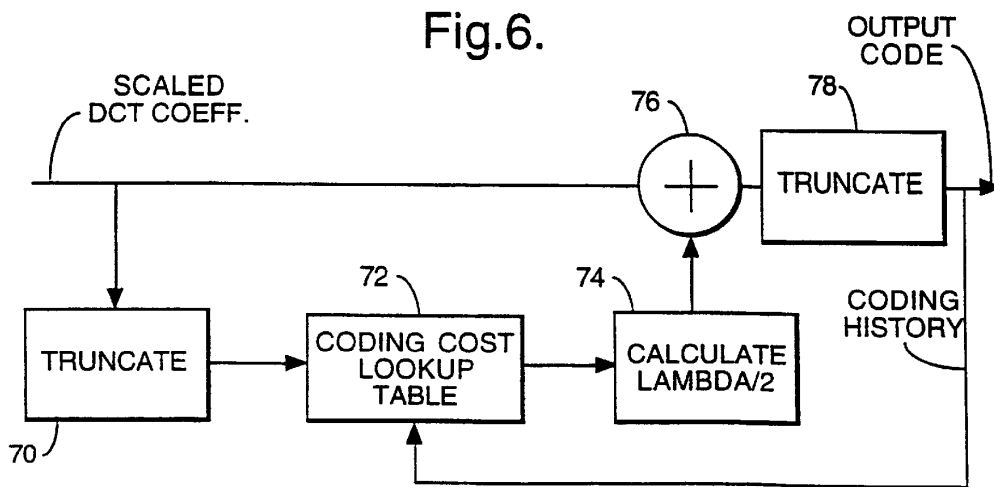

1

**DIGITAL SIGNAL COMPRESSION  
ENCODING WITH IMPROVED  
QUANTISATION**

FIELD OF THE INVENTION

This invention relates to the compression of digital video, audio or other signals.

BACKGROUND OF THE INVENTION

Compression encoding generally involves a number of separate techniques. These will usually include a transformation, such as the block-based discrete cosine transform (DCT) of MPEG-2; an optional prediction step; a quantisation step and variable length coding. This invention is particularly concerned in this context with quantisation.

The quantisation step maps a range of original amplitudes onto the same representation level. The quantisation process is therefore irreversible. MPEG-2, (in common with other compression standards such as MPEG-1, JPEG, CCITT/ITU-T Rec.H.261 and ITU-T Rec.H.263) defines representation levels and leaves undefined the manner in which the original amplitudes are mapped onto a given set of representation levels.

In general terms, a quantizer assigns to an input value, which may be continuous or may previously have been subjected to a quantisation process, a code usually selected from quantization levels immediately above and immediately below the input value. The error in such a quantization will generally be minimised if the quantization level closest to the input value is selected. In a compression system, it is further necessary to consider the efficiency with which respective quantization levels may be coded. In variable length coding, the quantization levels which are employed most frequently are assigned the shortest codes.

Typically, the zero level has the shortest code. A decision to assign a higher quantization level, on the basis that it is the closest, rather than a lower level (and especially the zero level) will therefore decrease coding efficiency. In MPEG2, the overall bit rate of the compressed signal is maintained beneath a pre-determined limit by increasing the separation of quantization levels in response to a tendency toward higher bit rate. Repeated decisions to assign quantization levels on the basis of which is closest, may through coding inefficiency thus lead to a coarser quantization process.

The behaviour of a quantizer in this respect may be characterised through a parameter  $\lambda$  which is arithmetically combined with the input value, with one value of  $\lambda$  (typically  $\lambda=1$ ) representing the selection of the closest quantization level or "rounding". A different value of  $\lambda$  (typically  $\lambda=0$ ) will in contrast represent the automatic choice of the lower of the two nearest quantization levels, or "truncating". In the MPEG2 reference coder, an attempt is made to compromise between the nominal reduction in error which is the attribute of rounding and the tendency toward bit rate efficiency which is associated with truncating, by setting a standard value for  $\lambda$  of  $\lambda=0.75$ .

Whilst particular attention has here been paid to MPEG2 coding, similar considerations apply to other methods of compression encoding of a digital signal, which including the steps of conducting a transformation process to generate values and quantising the values through partitioning the amplitude range of a value into a set of adjacent intervals, whereby each interval is mapped onto a respective one of a set of representation levels which are to be variable length

2

coded, such that a bound of each interval is controlled by a parameter  $\lambda$ . The transformation process may take a large variety of forms, including block-based transforms such as the DCT of MPEG2, and sub-band coding.

SUMMARY OF THE INVENTION

It is an object of one aspect of the present invention to provide an improvement in such a method which enables higher quality to be achieved at a given bitrate or a reduction in bitrate for a given level of quality.

Accordingly, the present invention is in one aspect characterised in that  $\lambda$  is controlled so as to vary dynamically the bound of each interval with respect to the associated representation level.

Suitably, wherein each value is arithmetically combined with  $\lambda$ .

Advantageously,  $\lambda$  is:

a function of the quantity represented by the value;

where the transformation is a DCT, a function of horizontal and vertical frequency;

a function of the quantisation step size; or

a function of the amplitude of the value.

In a particular form of the present invention, the digital signal to be encoded has been subjected to previous encoding and decoding processes and  $\lambda$  is controlled as a function of a parameter in said previous encoding and decoding processes.

In a further aspect, the present invention consists in a ( $q$ ,  $\lambda$ ) quantiser operating on a set of transform coefficients  $x_k$  representative of respective frequency indices  $f_k$  in which  $\lambda$  is dynamically controlled in dependence upon the values of  $x_k$  and  $f_k$ .

Advantageously,  $\lambda$  is dynamically controlled to minimise a cost function  $D+\mu H$  where  $D$  is a measure of the distortion introduced by the quantisation in the uncompressed domain and  $H$  is a measure of compressed bit rate.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described by way of example with reference to the accompanying drawings, in which:

FIG. 1 is a diagram illustrating the relationships between representation levels, decision levels and the value of  $\lambda$ ;

FIG. 2 is a block diagram representation of the quantization process in the MPEG2 reference coder;

FIG. 3 is a block diagram representation of a simplified and improved quantization process;

FIG. 4 is a block diagram representation of the core elements of FIG. 3;

FIG. 5 is a block diagram representation of a quantization process according to one aspect of the present invention; and

FIG. 6 is a block diagram representation of a quantization process according to a further aspect of the present invention.

DETAILED DESCRIPTION OF THE  
INVENTION

In the specifically mentioned compression standards, the original amplitude  $x$  results from a discrete cosine transform (DCT) and is thus related to a horizontal frequency index  $f_{hor}$  and a vertical frequency index  $f_{ver}$ . Whilst this approach is taken as an example in what follows, the invention is not restricted in this regard.

In general, a quantiser describes a mapping from an original amplitude  $x$  of frequencies  $f_{hor}$  and  $f_{ver}$  onto an

# Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

## Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

## Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

## Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

## API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

## LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

## FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

## E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.