

Microsoft Press

Computer Dictionary

Third Edition

Microsoft Press

PUBLISHED BY
Microsoft Press
A Division of Microsoft Corporation
One Microsoft Way
Redmond, Washington 98052-6399

Copyright © 1997 by Microsoft Corporation

All rights reserved. No part of the contents of this book may be reproduced or transmitted in any form or by any means without the written permission of the publisher.

Library of Congress Cataloging-in-Publication Data pending.

ISBN 1-57231-743-4

Printed and bound in the United States of America.

1 2 3 4 5 6 7 8 9 QMQM 2 1 0 9 8 7

Distributed to the book trade in Canada by Macmillan of Canada, a division of Canada Publishing Corporation.

A CIP catalogue record for this book is available from the British Library.

Microsoft Press books are available through booksellers and distributors worldwide. For further information about international editions, contact your local Microsoft Corporation office. Or contact Microsoft Press International directly at fax (425) 936-7329. Visit our Web site at mspress.microsoft.com.

Macintosh, Power Macintosh, QuickTime, and TrueType fonts are registered trademarks of Apple Computer, Inc. Intel is a registered trademark of Intel Corporation. DirectInput, DirectX, Microsoft, Microsoft Press, MS-DOS, Visual Basic, Visual C++, Win32, Win32s, Windows, Windows NT, and XENIX are registered trademarks and ActiveMovie, ActiveX, and Visual J++ are trademarks of Microsoft Corporation. Java is a trademark of Sun Microsystems, Inc. Other product and company names mentioned herein may be the trademarks of their respective owners.

Acquisitions Editor: Kim Fryer

Project Editors: Maureen Williams Zimmerman, Anne Taussig

Technical Editors: Dail Magee Jr., Gary Nelson, Jean Ross, Jim Fuchs, John Conrow,
Kurt Meyer, Robert Lyon, Roslyn Lutsch

which have speeds of 500 kilobits per second (Kbps), can generally transmit data faster than current conventional modems. *See also* coaxial cable, modem.

cabling diagram \kāˈbə-lēng dī-ə-gram\ *n.* A plan that shows the path of cables that attach computer system components or peripherals. Cabling diagrams are particularly important for explaining the connection of disk drives to a disk controller.

cache \kash\ *n.* A special memory subsystem in which frequently used data values are duplicated for quick access. A memory cache stores the contents of frequently accessed RAM locations and the addresses where these data items are stored. When the processor references an address in memory, the cache checks to see whether it holds that address. If it does hold the address, the data is returned to the processor; if it does not, a regular memory access occurs. A cache is useful when RAM accesses are slow compared with the microprocessor speed, because cache memory is always faster than main RAM memory. *See also* disk cache, wait state.

cache card \kashˈkärd\ *n.* An expansion card that increases a system's cache memory. *See also* cache, expansion board.

cache memory \kashˈmem-ər-ē\ *n.* *See* cache.


CAD \kad, CˈA-D\ *n.* Acronym for **computer-aided design**. A system of programs and workstations used in designing engineering, architectural, and scientific models ranging from simple tools to buildings, aircraft, integrated circuits, and molecules. Various CAD applications create objects in two or three dimensions, presenting the results as wire-frame "skeletons," as more substantial models with shaded surfaces, or as solid objects. Some programs can also rotate or resize models, show interior views, generate lists of materials required for construction, and perform other allied functions. CAD programs rely on mathematics, often requiring the computing power of a high-performance workstation. *See also* CAD/CAM, I-CASE.

CAD/CAM \kadˈkam, C-A-DˈC-A-M\ *n.* Acronym for **computer-aided design/computer-aided manufacturing**. The use of computers in both the design and manufacture of a product. With CAD/CAM, a product, such as a machine part, is designed with a CAD program and the finished design is translated into a set of instructions that

can be transmitted to and used by the machines dedicated to fabrication, assembly, and process control. *See also* CAD, I-CASE.

CADD \CˈA-D-Dˈ, kad-Dˈ\ *n.* *See* computer-aided design and drafting.

caddy \kadˈē\ *n.* A plastic carrier that holds a CD-ROM and is inserted into a CD-ROM drive. Some personal computers, especially older models, have CD-ROM drives that require the use of a caddy. Most current CD-ROM drives do not require a caddy. *See* the illustration.



Caddy.

CAE \CˈA-E\ *n.* Acronym for **computer-aided engineering**. An application that enables the user to perform engineering tests and analyses on designs created with a computer. In some instances, capabilities such as logic testing that are generally attributed to CAE applications are also part of CAD programs, so the distinction between CAD and CAE is not a hard-and-fast one. *See also* CAD, I-CASE.


CAI \CˈA-I\ *n.* Acronym for **computer-aided (or computer-assisted) instruction**. An educational program designed to serve as a teaching tool. CAI programs typically use tutorials, drills, and question-and-answer sessions to present a topic and to test the student's comprehension. CAI programs are excellent aids for presenting factual material and for allowing students to pace their learning speed. Subjects and complexity range from beginning arithmetic to advanced mathematics, science, history, computer studies, and specialized topics. *See also* I-CASE. *Compare* CBT, CMI.

CAL \CˈA-L\ *n.* Acronym for **computer-assisted (or computer-augmented) learning**. *See* CAI.

Apple II

long cited as a shortcoming of the Macintosh compared with IBM PCs and compatibles. This feature, along with other layout changes and the addition of new keys and lights, makes the Apple Extended Keyboard quite similar in form to the IBM enhanced keyboard. See the illustration. *See also* enhanced keyboard.

Apple II \ap`l tōō` \ *n.* The second computer introduced by the Apple Computer Corporation, in April 1977. The Apple II featured 4K dynamic RAM, expandable to 48K (with 16K chips), and used the 6502 microprocessor. The Apple II was the first computer to offer a TV video adapter as an optional alternative to a color computer monitor. It also featured sound and eight expansion slots. *See also* 6502.

Apple key \ap`l kē` \ *n.* A key on Apple keyboards labeled with an outline of the Apple logo . On the Apple Extended Keyboard, this key is the same as the Command key, which functions similarly to the Control key on IBM and compatible keyboards. It is generally used in conjunction with a character key as a shortcut to making menu selections or starting a macro.

Apple Macintosh \ap`l mak`ən-tosh` \ *n.* *See* Macintosh.

Apple Newton \ap`l nōō`tən` \ *n.* *See* Newton.

AppleScript \ap`l-skript` \ *n.* A script language used with Macintosh computers running under the System 7 operating system to execute commands and automate functions. *See also* script.

AppleShare \ap`l-shâr` \ *n.* File server software that works with the Mac OS and allows one Mac-

application binary interface


intosh computer to share files with another on the same network. *See also* file server, Mac OS.

applet \a`plət` \ *n.* A small piece of code that can be transported over the Internet and executed on the recipient's machine. The term is especially used to refer to such programs as they are embedded in line as objects in HTML documents on the World Wide Web.

AppleTalk \ap`l tāk` \ *n.* An inexpensive local area network developed by Apple that can be used by Apple and non-Apple computers to communicate and share resources such as printers and file servers. Non-Apple computers must be equipped with AppleTalk hardware and suitable software. The network uses a layered set of protocols similar to the ISO/OSI model and transfers information in the form of packets called frames. AppleTalk supports connections to other AppleTalk networks through devices known as bridges, and it supports connections to dissimilar networks through devices called gateways. *See also* bridge, frame (definition 2), gateway.

application \a`plə-kā`shən` \ *n.* A program designed to assist in the performance of a specific task, such as word processing, accounting, or inventory management. *Compare* utility.

application binary interface \a-plə-kā`shən bī`nər-ē in`tər-fās, bī`nâr-ē` \ *n.* A set of instructions that specifies how an executable file interacts with the hardware and how information is stored. *Acronym:* ABI (A`B-I`). *Compare* application programming interface.

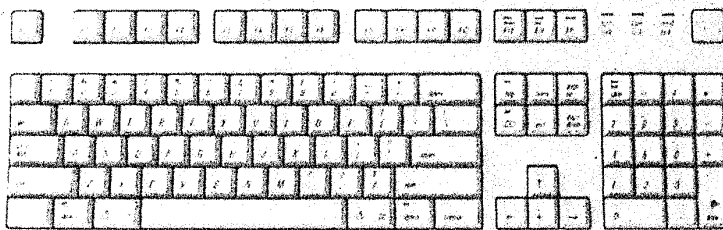

Apple Extended Keyboard.

application-centric \a`plə-kā`shən-sen`trik\ *adj.*

Of, pertaining to, or characteristic of an operating system in which a user invokes an application to open or create documents (such as word processing files or spreadsheets). Command-line interfaces and some graphical user interfaces such as the Windows 3.x Program Manager are application-centric. *Compare* document-centric.

application developer \a-plə-kā`shən də-vel`ə-pər\ *n.* An individual who designs and analyzes the appearance and operation of an application program.

application development environment \a-plə-kā`shən də-vel`əp-mənt en-vī`rən-mənt, en-vī`ərən-mənt\ *n.* An integrated suite of programs for use by software developers. Typical components of application development environments include a compiler, file browsing system, debugger, and text editor for use in creating programs.

application development language \a-plə-kā`shən də-vel`əp-mənt lang`wəj\ *n.* A computer language designed for creating applications. The term is usually restricted to refer to languages with specific high-level constructs geared toward record design, form layout, database retrieval and update, and similar tasks. *See also* application, application generator, 4GL.

application development system \a-plə-kā`shən də-vel`əp-mənt sis`təm\ *n.* A programming environment designed for the development of an application, typically including a text editor, compiler, and linker, and often including a library of common software routines for use in the developed program.

application file \a`plə-kā`shən fīl\ *n.* *See* program file.

application gateway \a-plə-kā`shən gāt`wā\ *n.* Software running on a machine that is intended to maintain security on a secluded network yet allow certain traffic to go between the private network and the outside world. *See also* firewall.

application generator \a-plə-kā`shən jen`ər-ā-tər\ *n.* Software for generating source or machine code for running an application based on a description of the desired functionality. Limited in scope, application generators are included with some database programs and use built-in instruc-

tion sets to generate program code. *See also* application.

application heap \a`plə-kā`shən hēp`\ *n.* A block of RAM used by an application to store its code, resources, records, document data, and other information. *See also* heap (definition 1), RAM.

application layer \a`plə-kā`shən lār`, la`yər\ *n.* The highest layer of standards in the Open Systems Interconnection (OSI) model. The application layer contains signals that perform useful work for the user, such as file transfer or remote access to a computer, as opposed to lower levels, which control the exchange of data between transmitter and receiver. *See also* ISO/OSI model.

application processor \a`plə-kā`shən pros`e-sər\ *n.* A processor dedicated to a single application.

application program \a`plə-kā`shən prō`gram\ *n.* *See* application.

application programming interface \a-plə-kā`shən prō`gra-mēng in`tər-fās\ or **application program interface** \a-plə-kā`shən prō`gram in`tər-fās\ *n.* A set of routines used by an application program to direct the performance of procedures by the computer's operating system. *Acronym:* API (A`P-I`).

application shortcut key \a-plə-kā`shən shōrt`kut kē`\ *n.* A key or combination of keys that when pressed will quickly perform an action within an application that would normally require several user actions, such as menu selections. *Also called* keyboard shortcut.

application software \a-plə-kā`shən soft`wār\ *n.* *See* application.

application-specific integrated circuit \a-plə-kā`shən-spə-sif`ik in`tə-grā-təd sər`kət\ *n.* *See* gate array.

application suite \a-plə-kā`shən swēt\ *n.* *See* suite (definition 1).

.aq \dot`A-Q`\ *n.* On the Internet, the major geographic domain specifying that an address is located in Antarctica.

.ar \dot`A-R`\ *n.* On the Internet, the major geographic domain specifying that an address is located in Argentina.

arbitration \är`bə-trā`shən\ *n.* A set of rules for resolving competing demands for a machine resource by multiple users or processes. *See also* contention.

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.