

- Goldberg, editors, *Neural Networks in Robotics*, pages 347–374. Kluwer Academic Publishers, 1992.
- [44] Carl Weiman and George Chaikin. Logarithmic spiral grids for image processing and display. *Computer Graphics and Image Processing*, 11, 1979.
- [45] Carl F. R. Weiman. 3-d sensing with polar exponential sensor arrays. *SPIE Conference on Digital and Optical Shape Representation and Pattern Recognition*, April 1988.
- [46] Carl F. R. Weiman. Exponential sensor array geometry and simulation. In *SPIE Conference on Digital and Optical Shape Representation and Pattern Recognition*, April 1988.
- [47] Carl F. R. Weiman. Polar exponential sensor arrays unify iconic and hough space representation. In *SPIE: Intelligent Robots and Computer Vision VIII: Algorithms and Techniques*, pages 832–841, 1989.
- [48] Hiroyuki Yamaguchi, Muneo Iida, Akira Tonomo, and Fumio Kishino. Picture quality of a large field visual field display with selective high resolution in foveal vision region. *ITEJ Technical Report*, 14(12), 1990. in Japanese.
- [49] Hiroyuki Yamaguchi, Akira Tonomo, and Yukio Kobayashi. Proposal for a large field visual display employing eye movement tracking. *SPIE Optics, Illumination and Image Sensing for machine vision*, 1194, 1989.
- [50] Isamu Yorizawa and Makato Kosugi. Depth image reconstruction from motion vectors using cortical image mapping. In *Proceedings of 1991 Electronics, Information and Communications Society Fall National Conference*, 1991. in Japanese.

- [30] Azriel Rosenfeld and Avinash C. Kak. *Digital Picture Processing, 2nd Edition*. Academic Press, 1982.
- [31] H. Samet. Region representation: quadtrees from boundary codes. *CACM*, 23:163–170, March 1980.
- [32] Giulio Sandini, Paolo Dario, and I. Debusschere. Active vision based on space-variant sensing. In *5th International Symposium on Robotics Research*, August 1989.
- [33] Giulio Sandini, Paolo Dario, and I. Debusschere. The use of an anthropomorphic visual sensor for motion estimation and object tracking. In *Proc. OSA Topical Meeting on Image Understanding*, 1989.
- [34] Eric L. Schwartz. Spatial mapping in primate sensory perception. *Biological Cybernetics*, 25, 1977.
- [35] Akio Shio. An automatic thresholding algorithm based on an illumination-independent contrast measure. In *Conference on Computer Vision and Pattern Recognition*, pages 632–637, 1989.
- [36] Michael J. Swain and Markus Stricker Ed. Promising directions in active vision. Technical report, University of Chicago, Chicago, August 1991.
- [37] Akira Tonomo, Muneo Iida, and Yukio Kobayashi. A tv camera system which extracts feature points for non-contact eye movement detection. *SPIE Optics, Illumination and Image Sensing for machine vision*, 1194, 1989.
- [38] Douglas B. Tweed and Tutis Vilis. The superior colliculus and spatiotemporal translation in the saccadic system. *Neural Networks*, 3:75–86, 1990.
- [39] J. van der Spiegel et. al. A foveated retina-like sensor using ccd technology. In C. Mean and M. Ismail, editors, *Analog VLSI Implementations of Neural Networks*. Kluwer, 1989.
- [40] Richard S. Wallace, Benjamin B. Bederson, and Eric L. Schwartz. Voice bandwidth visual communication through logmaps: The telecortex. In *Proceedings of the IEEE Workshop on Applications of Computer Vision*, November 1992.
- [41] Richard S. Wallace, Ping-Wen Ong, Benjamin B. Bederson, and Eric L. Schwartz. Connectivity graphs for space-variant image processing. Technical Report VAI-1, Vision Applications, Inc., 1991.
- [42] Richard S. Wallace, Ping-Wen Ong, Benjamin B. Bederson, and Eric L. Schwartz. Space-variant image processing. Technical Report 256, New York University, Computer Science, Robotics Research, October 1991.
- [43] Richard S. Wallace, Ping-Wen Ong, Benjamin B. Bederson, and Eric L. Schwartz. Connectivity graphs for space-variant active vision. In George A. Bekey and Kenneth Y.

- [15] Mark S. Franzblau. Log mapped focal driven procedural rendering: an application of the complex log map to ray tracing. Master's thesis, Courant Institute, New York University, 1991.
- [16] J. Frazier and R. Nevatia. Detecting moving objects from a moving platform. In *IEEE International Conference on Robotics and Automation*, May 1992.
- [17] B. K. P. Horn. *Robot Vision*. MIT Press, 1986.
- [18] Hurlbert and T. Poggio. Do computers need attention? *Nature*, 321:651–652, June 1986.
- [19] G. Kreider, J. Van der Spiegel, I. Born, C. Claeys, I. Debusschere, G. Sandini, P. Dario, and F. Fantini. A retina like space variant ccd sensor. *SPIE/Charge-Coupled Devices and Solid State Optical Sensors*, 1242, 1990.
- [20] Marc Levoy and Ross Whitaker. Gaze-directed volume rendering. *Computer Graphics*, 24(2):217–223, 1991.
- [21] R. A. Messner and H. H. Szu. An image processing architecture for real time generation of scale and rotation invariant patterns. *Computer Vision, Graphics, and Image Processing*, 31:50–66, 1985.
- [22] A. Montanvert, P. Meer, and A. Rosenfeld. Hierarchical image analysis using irregular tessellations. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 13(4):307–316, 1991.
- [23] C. Narathong, R.M. Inigo, J.F. Doner, and E.S. McVey. Motion-vision architectures. In *Proceedings of Computer Vision and Pattern Recognition*, pages 411–416, 1988.
- [24] Ping-Wen Ong. *Image Processing, Pattern Recognition and Attentional Algorithms in a Space-Variant Active Vision System*. PhD thesis, New York University, Courant Institute, 1992.
- [25] Ping-Wen Ong, Richard S. Wallace, and Eric L. Schwartz. Space-variant optical character recognition. In *11th International Conference on Pattern Recognition*, August 1992.
- [26] Pietro Perona and Jitendra Malik. Scale-space and edge detection using anisotropic diffusion. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 12(7):629–639, 1990.
- [27] Alan Rojer and Eric L. Schwartz. Design of a space-variant sensor having a complex log geometry. In *10th International Conference on Pattern Recognition Volume 2*, 1990.
- [28] Alan S. Rojer. *Space-variant computer vision with a complex-logarithmic sensor geometry*. PhD thesis, New York University, Courant Institute, 1989.
- [29] A. Rosenfeld. Connectivity in digital pictures. *Journal of the ACM*, 17(1):146–160, 1970.

References

- [1] Dana Ballard and Christopher Brown. *Computer Vision*. Prentice-Hall, 1982.
- [2] Aijaz A. Baloch and Allen M. Waxman. A neural system for behavioral conditioning of mobile robots. *International Joint Conference on Neural Networks*, pages 723–728, June 1990.
- [3] Benjamin B. Bederson. *A miniature space-variant active vision system: Cortex-I*. PhD thesis, New York University, Courant Institute, 1992.
- [4] Benjamin B. Bederson. A miniature space-variant active vision system: Cortex-I. Technical Report 266, New York University, Computer Science, Robotics Research, June 1992.
- [5] Benjamin B. Bederson, Richard S. Wallace, and Eric L. Schwartz. A miniaturized active vision system. Technical Report 255, New York University, Computer Science, Robotics Research, October 1991.
- [6] Benjamin B. Bederson, Richard S. Wallace, and Eric L. Schwartz. Calibration of the spherical pointing motor. In *SPIE Conference on Intelligent Robots and Computer Vision*, November 1992.
- [7] Benjamin B. Bederson, Richard S. Wallace, and Eric L. Schwartz. A miniature pan-tilt actuator: The spherical pointing motor. Technical Report 264, Courant Institute, NYU, April 1992.
- [8] Benjamin B. Bederson, Richard S. Wallace, and Eric L. Schwartz. A miniaturized active vision system. In *11th International Conference on Pattern Recognition*, August 1992.
- [9] Benjamin B. Bederson, Richard S. Wallace, and Eric L. Schwartz. Two miniature pantilt devices. In *IEEE International Conference on Robotics and Automation*, May 1992.
- [10] C. Braccini, G. Gambardella, G. Sandini, and V. Tagliasco. A model of the early stages of the human visual system: Functional and topological transformations performed in the peripheral visual field. *Biological Cybernetics*, pages 57–58, 1982.
- [11] David Casasent and Demetri Psaltis. Position, rotation, and scale invariant optical correlation. *Applied Optics*, 15(7):1795–1799, July 1976.
- [12] G. M. Chaikin and C. F. R. Weiman. Image processing system. U.S. Patent No. 4,267,573, May 1981.
- [13] N. Deo. *Graph Theory with Applications to Engineering and Computer Science*. Prentice-Hall, 1974.
- [14] Eric L. Schwartz (ed.). Computational neuroscience: Applications of computer graphics and image processing to two and three dimensional modeling of the functional architecture of the visual cortex. *IEEE Computer Graphics and Applications*, 8(4), July 1988.

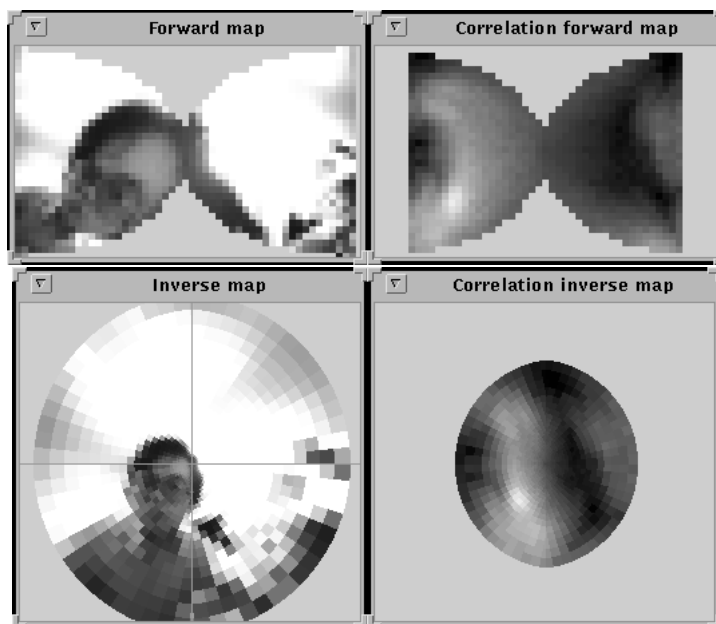


Figure 20: The left column shows the target image in the forward and inverse logmap coordinates. At the right is the result of template matching. The brightest pixel in the result map corresponds to the best matching position.

Transformation graphs are relatives of connectivity graphs that represent the effects of transformations such as translation and rotation in space variant images. Logmap images in particular are known to have elegant mathematical properties with respect to scaling and rotation, but translation of the data from these sensors has until now been problematic. If we have enough memory to represent all translation graphs for a particular sensor having k pixels, then we can compute a translated image in $O(k)$ steps. Our primary application of the translation graph is template matching. We show the results of template matching in a space variant image. The template matching operation is the basis for a target tracking program that requires processing only at the low data rate of the logmap sensor.

Image processing operations defined in the CG are independent of the sensor geometry. We developed a library of image processing routines that work on images from a variety of sensors. The CG image processing library will be useful as we continue to experiment with new sensor geometries, and as we begin to use future VLSI implementations of logmap sensors.³

³The authors would like to thank Dr. Ken Goldberg of the University of Southern California for his valuable comments on an early draft of this paper. We would also like to thank the anonymous referees for their substantive remarks and constructive criticisms. We gratefully thank Jack Judson of Texas Instruments for his technical assistance in the development of our logmap sensor.

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.