



US006522432B1

(12) **United States Patent**
Lin

(10) **Patent No.:** **US 6,522,432 B1**
(45) **Date of Patent:** **Feb. 18, 2003**

(54) **IMAGE SCANNER WITH AUTOMATIC SIGNAL COMPENSATION**

5,278,674 A * 1/1994 Webb et al. 358/475
5,296,944 A * 3/1994 Suzuki et al. 358/475
5,587,746 A * 12/1996 Nakakuki 348/708

(75) Inventor: **Chien-Chih Lin, Hsien (TW)**

* cited by examiner

(73) Assignee: **Primax Electronics Ltd., Taipei (TW)**

Primary Examiner—Mark Wallerson

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1049 days.

(74) *Attorney, Agent, or Firm*—Winston Hsu

(57) **ABSTRACT**

The present invention relates to an image scanner with automatic signal compensation function for compensating the instability of a light source of the image scanner. The image scanner comprises a test region, a light source for illuminating the document and the test region, optical means for conveying the light reflected from the document and the test region, a line image sensor for receiving the light from the optical means and generating an image signal corresponding to the light reflected from the document and a brightness signal corresponding to the light reflected from the test region, and a signal compensation circuit for amplifying the image signal according to the brightness signal to compensate the instability in the brightness of the light source.

(21) Appl. No.: **08/633,389**

(22) Filed: **Apr. 16, 1996**

(51) **Int. Cl.**⁷ **H04N 1/04**

(52) **U.S. Cl.** **358/475; 358/296**


(58) **Field of Search** 358/296, 461, 358/463, 465, 475, 509, 512, 516, 484, 348/234, 500, 708

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,151,796 A * 9/1992 Ito et al. 358/475
5,212,376 A * 5/1993 Liang 358/484
5,249,068 A * 9/1993 Takase 358/475

9 Claims, 3 Drawing Sheets

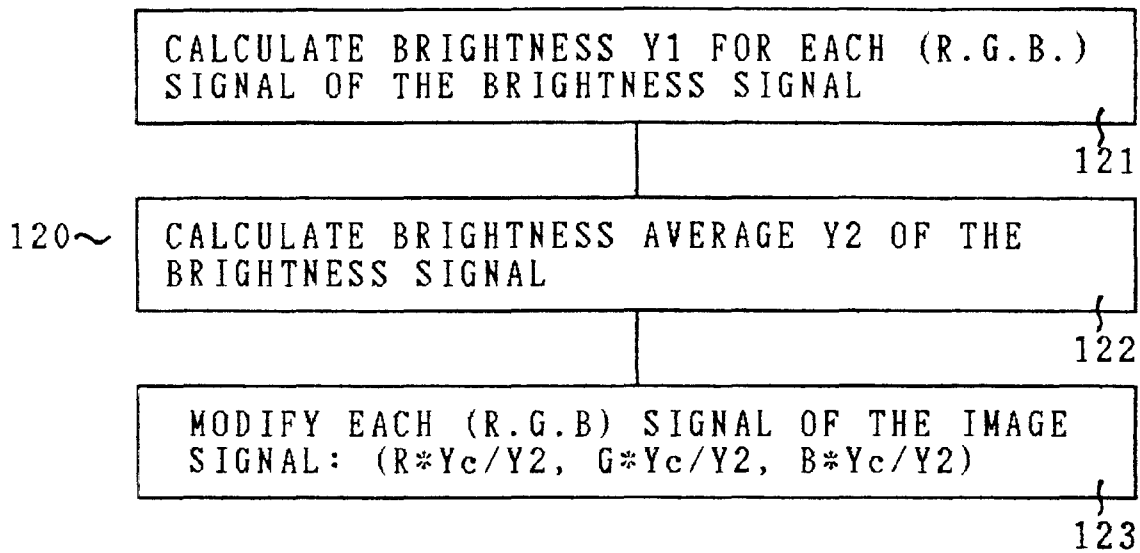

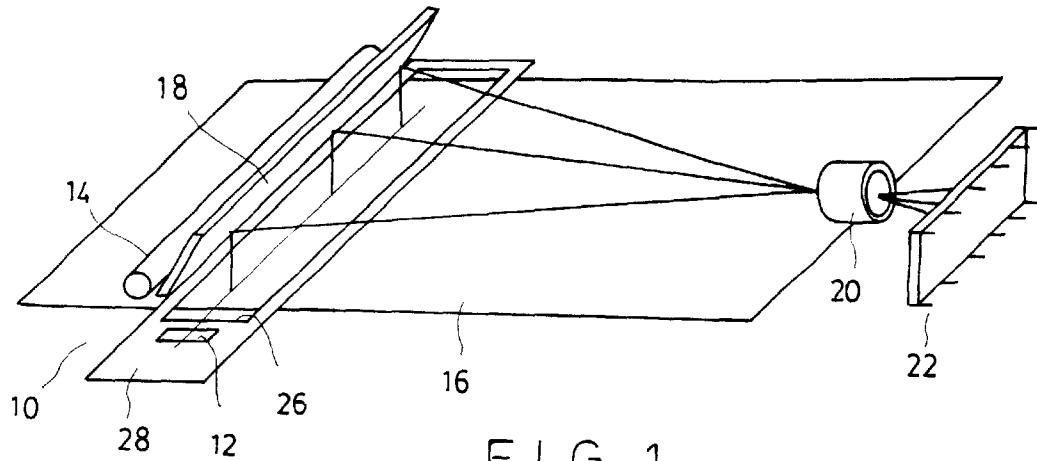


FIG. 1

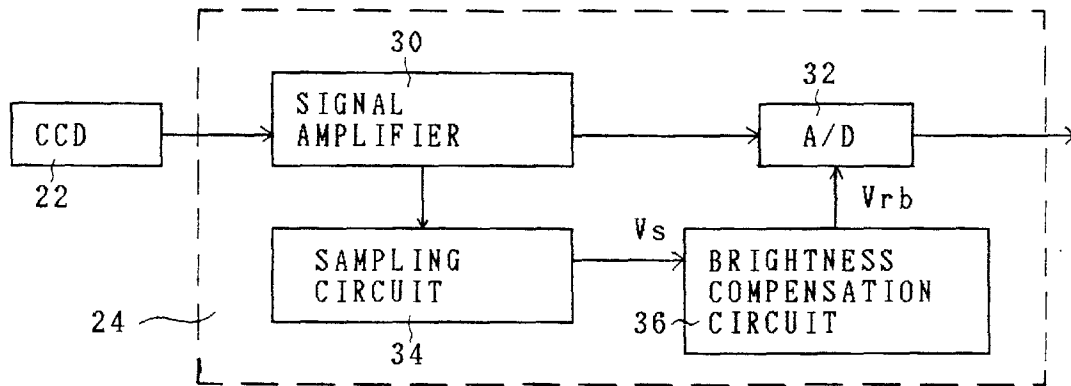


FIG. 2

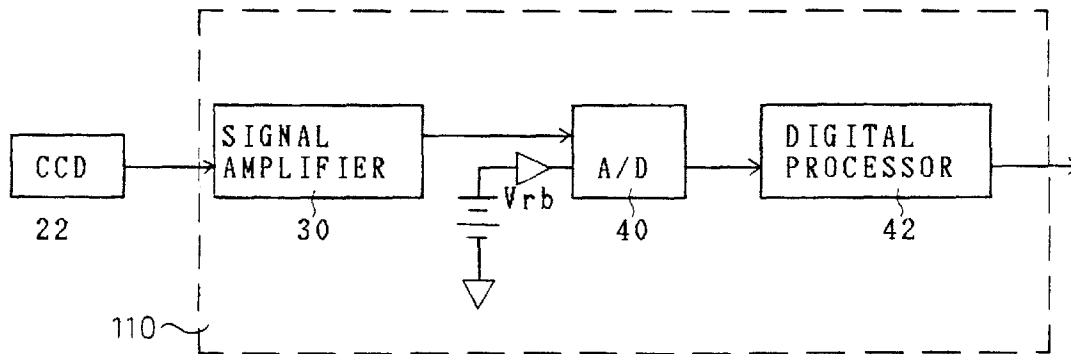


FIG. 11

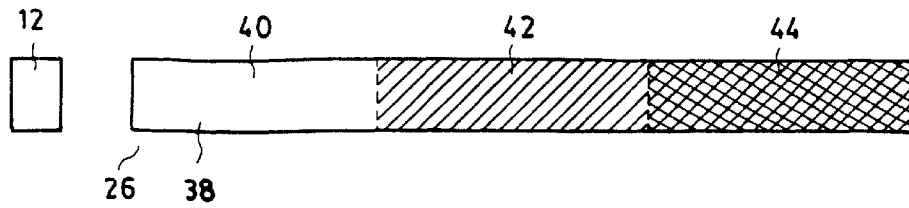


FIG. 3

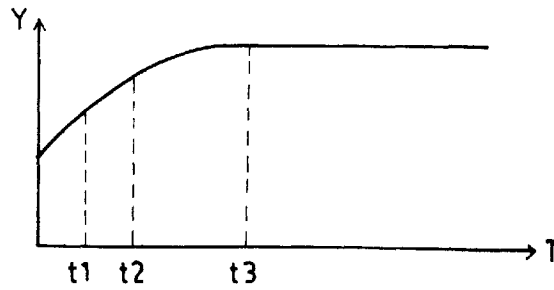


FIG. 4

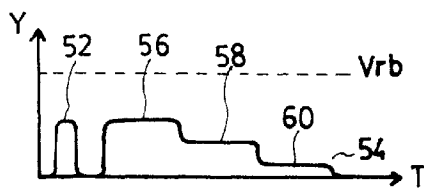


FIG. 5

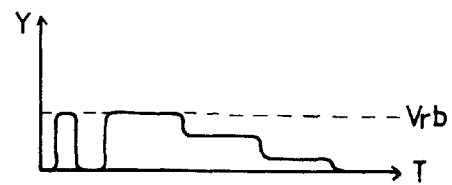


FIG. 8

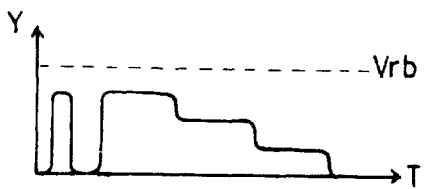


FIG. 6

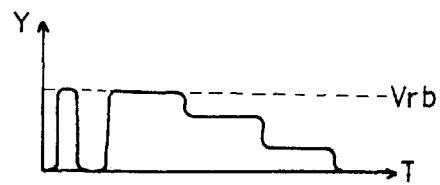


FIG. 9

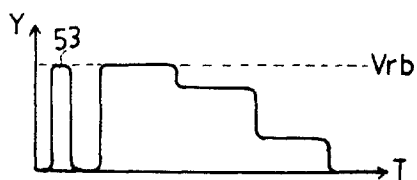


FIG. 7

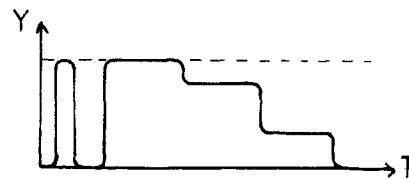


FIG. 10

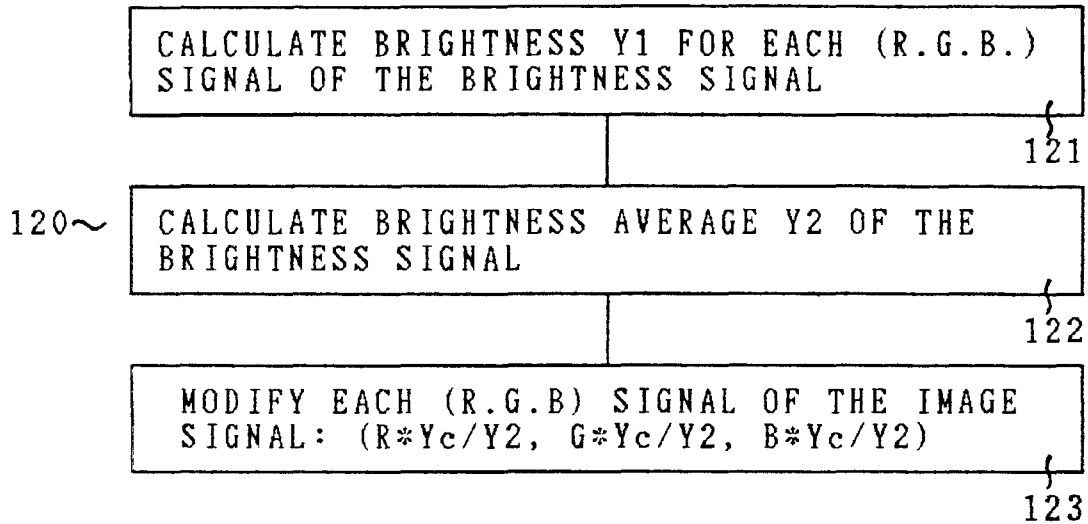


FIG. 12

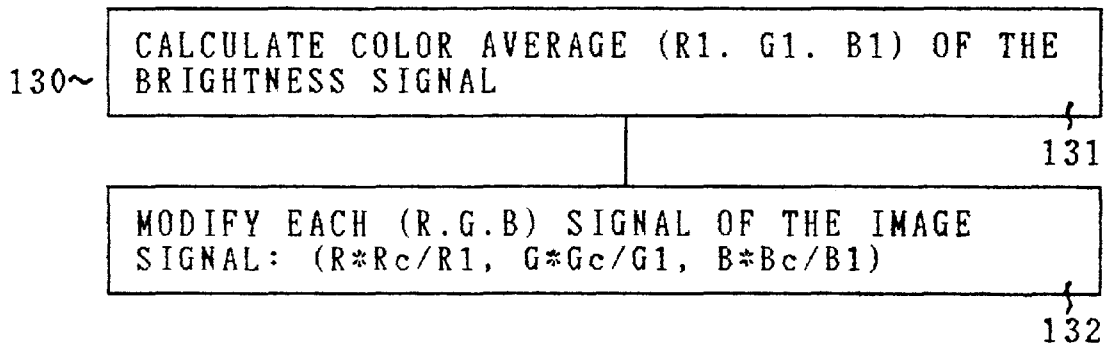


FIG. 13

IMAGE SCANNER WITH AUTOMATIC SIGNAL COMPENSATION

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to an image scanner, and signal compensation function for compensating the instability of a light source of the image scanner.

2. Description of the Prior Art

Fluorescent lamp such as cold cathode fluorescent tube (CCFT) is commonly used in color image scanner because of its broad spectrum coverage. One problem with such lamp is that its brightness will gradually change to a stable condition when it is powered on. Such period usually takes three to five minutes. In order to get a stable image output by using such a lamp, a user usually has to wait until the lamp is completely warmed up.

U.S. Pat. No. 5,212,376, which is assigned to the same assignee of the present invention, discloses an image scanner with an optic fiber connected to a line image sensor for measuring the brightness of the image scanner's light source and a signal compensation circuit for adjusting the brightness of the scanned image according to the measured brightness of the light source. The optic fiber method is very effective in measuring the brightness of the light source, but it requires high precision parts and installation process which is very expensive and time consuming. Besides, the brightness of the light measured by the optic fiber is very sensitive to the distance between the input end of the optic fiber and the light source. Any shock or vibration over the scanner may change this distance or move the input end of the optic fiber which may have great consequence over the output of the signal compensation circuit.

SUMMARY OF THE INVENTION

It is therefore a primary objective of the present invention to provide an image scanner which can measure the brightness of the scanner's light source to compensate a scanned image and avoid the above mentioned problem.

It is another objective of the present invention to provide an image scanner which can measure color variations of the scanner's light source to compensate the scanned image accordingly.

Briefly, in a preferred embodiment, the present invention includes an image scanner for scanning a document comprising:

- (1) a test region;
- (2) a light source for illuminating the document and the test region;
- (3) optical means for conveying the light reflected from the document and the test region;
- (4) a line image sensor for receiving the light from the optical means and generating an image signal corresponding to the light reflected from the document and a brightness signal corresponding to the light reflected from the test region; and
- (5) a signal compensation circuit for amplifying the image signal according to the brightness signal to compensate the instability in the brightness of the light source.

The line image sensor comprises an array of (red, green, blue) (R,G,B) sensing elements for converting the light received from the optical means into an array of corresponding (R,G,B) signals wherein both the image signal and the

brightness signals generated by the line image sensor are formed by an array of (R,G,B) signals. The signal compensation circuit comprises an A/D converter for digitizing the (R,G,B) signals of the image signal and the brightness signal, and a digital processor for adjusting the digitized (R,G,B) signals of the image signal according to the digitized (R,G,B) signals of the brightness signal. Each digitized (R,G,B) signal of the image signal is multiplied by a color compensation factor calculated which is obtained from the digitized (R,G,B) signals of the brightness signal to compensate the brightness and the color of the image signal.

It is an advantage of the present invention that it provides an image scanner which can measure the brightness of the scanner's light source by measuring the light reflected from the test region instead of by using an optic fiber.

It is another advantage of the present invention that the image scanner can measure color variations of the scanner's light source by measuring the light reflected from the test region to compensate the digitized RGB signals of the image signal.

These and other objects and the advantages of the present invention will no doubt become obvious to those of ordinary skill in the art after having read the following detailed description of the preferred embodiment which is illustrated in the various figures and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a hand-held image scanner's optical components according to the present invention.

FIG. 2 is a hardware block diagram of the signal compensation circuit of the scanner according to the present invention.

FIG. 3 shows the test region and a document viewed through a transparent window of the scanner.

FIG. 4 shows a curve of the brightness of the scanner's light source after it is powered on.

FIGS. 5 to 7 shows the brightness and image signals generated by the signal amplifier of the scanner.

FIGS. 8 to 10 shown each of the resulting reference voltages V_{rb} generated by the brightness compensation circuit of the scanner.

FIG. 11 is an alternative hardware block diagram of the signal compensation circuit.

FIG. 12 shows a process for compensating the brightness of the image signal.

FIG. 13 shows another process for compensating both the brightness and the color of the image signal.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Please refer to FIGS. 1 and 2. FIG. 1 is a perspective view of a hand-held image scanner's optical components according to the present invention and FIG. 2 is a hardware block diagram of the signal compensation circuit 24 attached to the CCD 22 shown in FIG. 1. The scanner 10 comprises a transparent window 26 for scanning a document 16 lying underneath, a rectangular glass 28 installed inside the window 26, a test region 12 installed on the glass 28 next to one side of the window 26, a light source 14 above the window 26 for illuminating a document 16 under the window 26 and the test region 12, an optical means which comprises a reflex mirror 18 and a lens 20 for conveying the light reflected from the document 16 and the test region 12, a line image sensor 22 which is a CCD (charge couple device) for

Explore Litigation Insights

Docket Alarm provides insights to develop a more informed litigation strategy and the peace of mind of knowing you're on top of things.

Real-Time Litigation Alerts



Keep your litigation team up-to-date with **real-time alerts** and advanced team management tools built for the enterprise, all while greatly reducing PACER spend.

Our comprehensive service means we can handle Federal, State, and Administrative courts across the country.

Advanced Docket Research



With over 230 million records, Docket Alarm's cloud-native docket research platform finds what other services can't. Coverage includes Federal, State, plus PTAB, TTAB, ITC and NLRB decisions, all in one place.

Identify arguments that have been successful in the past with full text, pinpoint searching. Link to case law cited within any court document via Fastcase.

Analytics At Your Fingertips



Learn what happened the last time a particular judge, opposing counsel or company faced cases similar to yours.

Advanced out-of-the-box PTAB and TTAB analytics are always at your fingertips.

API

Docket Alarm offers a powerful API (application programming interface) to developers that want to integrate case filings into their apps.

LAW FIRMS

Build custom dashboards for your attorneys and clients with live data direct from the court.

Automate many repetitive legal tasks like conflict checks, document management, and marketing.

FINANCIAL INSTITUTIONS

Litigation and bankruptcy checks for companies and debtors.

E-DISCOVERY AND LEGAL VENDORS

Sync your system to PACER to automate legal marketing.